



Strand Associates, Inc.[®]
1170 South Houbolt Road
Joliet, IL 60431
(P) 815.744.4200
www.strand.com

December 5, 2024

Mr. Mark Labno, Township Highway Commissioner
Lemont Township
1115 Warner Avenue
Lemont, IL 60439

Re: Roadway Pavement Evaluation
Lemont Township, Illinois (Township)

Dear Mr. Labno:

This letter provides the results of Strand Associates, Inc.[®]'s (Strand) 2024 pavement condition evaluation of the Township's roadway system. The purpose of this evaluation was to develop an updated prioritization for roadway repairs based solely on a pavement condition rating system. A previous pavement condition evaluation and report was completed by Strand in December 2019. For this evaluation, the Pavement Condition Index (PCI) rating system was used along with PAVER[™] (a pavement management software) to assess the roadway conditions. An evaluation of 122 roadways under the Township's jurisdiction was completed. This includes approximately 27 miles (141,400 linear feet) of asphalt pavements. Table 1 in Appendix A has a full inventory of the assessed pavements.

EXISTING CONDITIONS

PAVER[™] is a software product developed by the United States Army Corps of Engineers that provides pavement management capabilities to develop and organize a pavement inventory, assess current pavement conditions, and develop pavement maintenance plans. The software uses the PCI methodology presented in the current editions of the American Society for Testing and Materials (ASTM) D 6433-07, *Standard Practice for Roads and Parking Lots Pavement Condition Index Surveys* to rate the surface conditions of the pavement. The PCI is a numerical rating of the pavement condition ranging from 0 to 100, with 0 being the worst possible condition and 100 being the best possible condition.

The Township's roadway system was compiled in PAVER[™] to develop and organize a pavement inventory. Inventory management is based on a tiered structure composed of networks, branches, and sections. The network is the largest managed unit and encompasses all roadways within the Township jurisdiction. Each roadway is considered an individual branch, and the branches were then divided into sections. Pavement rating directly correlates to the recommended rehabilitation; therefore, pavement sections can be separated and rated differently. The longer branches, branches with varying widths, or branches with varying construction dates (115th Street, Horseshoe Lane, East Briar Patch Lane, East Hunt Master Lane, Fox Hill Drive, Meadow Hill Lane, Leinster Drive, and 135th Street) were divided into multiple sections while the rest of the branches consist of one section.

PAVEMENT SURFACE CONDITIONS ASSESSMENT

The type and severity of pavement distresses were assessed by visual inspection of the different sections. Distresses were quantified from field measurements and recorded in PAVER[™] which, based on the user

MG2:amm\S:\JOL\4400-4499\4481\015\Designs-Studies-Reports\Roadway\Report\Pavement Evaluation.120524.docx

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 2
 December 5, 2024

inputs, provided a PCI rating for each roadway section. Typical asphalt pavement distresses include surface defects (raveling and weathering), surface deformation (rutting, shoving, slippage, and depressions), cracking (transverse, longitudinal, block, alligator, and edge), and other distresses such as potholes, patching, and lane or shoulder drop off.

The purpose of a pavement rating system is not only to identify different types of pavements distresses, but also to determine the probable cause of distress. Understanding the cause is imperative in selecting the appropriate maintenance and rehabilitation work. Pavement distresses are commonly caused by structural effects or environmental effects. Structural distresses can occur when the pavement experiences heavier traffic loads than it was designed to carry or when moisture becomes trapped in the subgrade. Excess moisture can also cause environmental distresses such as weathering

A pavement's deterioration rate is dependent on its environment, traffic loading conditions, drainage conditions, original construction quality, and provisional maintenance practices. Poor quality materials, poor construction procedures, and insufficient drainage can considerably reduce the life of a pavement while timely and effective maintenance can extend it. Effective maintenance practices include crack sealing and seal coating to reduce and alleviate the effect of excessive moisture in the aging of pavement surfaces. The following is a summary of the different pavement distresses observed during field evaluations with their typical repair methods.

SURFACE DEFECTS

Raveling

Raveling is the progressive loss of pavement material from the surface caused by bituminous material being stripped from the aggregate. This stripping may be caused by the hardening of asphalt from aging or poor compaction during construction, especially in cold weather. Raveling may also be caused by insufficient asphalt content in the original pavement mix. Low to medium raveling comprises a surface with considerable loss of coarse aggregate (greater than 20 per square yard) or clusters of missing coarse aggregate. High raveling is observed when the surface is very rough and pitted and may be removed in some places.



Figure 1 Low to Medium Raveling
 PAVER™ Distress Identification Manual



Figure 2 High Raveling
 PAVER™ Distress Identification Manual

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 3
 December 5, 2024

Repair

Low to medium raveling can be repaired with seal coating, microsurfacing, or a thin overlay. Depending on pavement conditions, high raveling can be repaired with a mill and overlay.

Weathering

Weathering is the wearing away of the asphalt binder and fine aggregate matrix and is often caused by oxidation, poor compaction, insufficient asphalt content, excessive natural sand, surface water erosion, and traffic. An asphalt surface with low weathering shows noticeable fine aggregate loss and may be accompanied by fading of the asphalt color. Edges of the coarse aggregate are exposed less than 0.05 inches. Medium weathering is indicated by edges of the coarse aggregate exposed up to a quarter width of the longest side of the coarse aggregate and high weathering exposes more than a quarter width of the longest side of the coarse aggregate.



Figure 3 Low Weathering
 PAVER™ Distress Identification Manual



Figure 4 Medium Weathering
 PAVER™ Distress Identification Manual



Figure 5 High Weathering
 PAVER™ Distress Identification Manual

Repair

Similar to raveling, low to medium severities of weathering can be repaired with seal coating, microsurfacing, or a thin overlay. High severity weathering can be repaired with a mill and overlay.

SURFACE DEFORMATION

Rutting

A rut is the displacement of pavement material that creates surface depressions in the wheel paths. Pavement uplift may occur along the sides of the rut, but in many instances, ruts are only noticeable after a rainfall when the paths are filled with water. Rutting may be caused by a permanent deformation in the pavement layers or subgrades, usually caused by consolidation or lateral movement of the materials from traffic load. Severity levels of rutting are based on the depth of the rut with low rutting between 1/4 to 1/2 inch, medium rutting between 1/2 inch and 1 inch, and high rutting greater than 1 inch.

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 4
 December 5, 2024

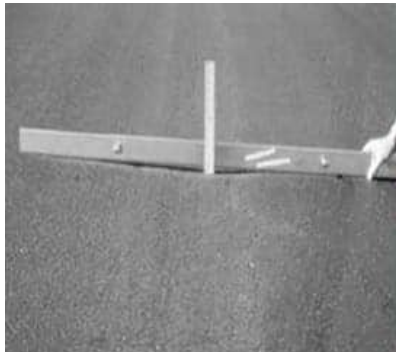


Figure 6 Low Rutting
 PAVER™ Distress Identification Manual



Figure 7 Medium Rutting
 PAVER™ Distress Identification Manual



Figure 8 High Rutting
 PAVER™ Distress Identification Manual

Repair

Low severity rutting can be repaired with microsurfacing or a thin overlay. Medium to high severities of rutting may necessitate repairs to the base or subgrade or a full reconstruction followed by resurfacing.

Shoving

Shoving is the permanent displacement of a localized area of the pavement surface oftentimes caused by traffic loading. When traffic pushes against the pavement, it produces a short, abrupt wave in the pavement surface. Shoving generally only occurs in unstable liquid asphalt mix pavements.



Figure 9 Low Shoving
 PAVER™ Distress Identification Manual



Figure 10 Medium Shoving
 PAVER™ Distress Identification Manual



Figure 11 High Shoving
 PAVER™ Distress Identification Manual

Repair

Pavement shoving can be repaired with deep or full-depth patches.

Slippage

Slippage cracks are crescent or rounded cracks that are pointed in the direction of traffic. These cracks usually occur when there is a poor bond between the surface and the next layer of pavement structure. With a poor bond between these two layers, braking or turning wheels can cause the overlay layer to

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 5
 December 5, 2024

slide from the underlying pavement. Low slippage includes cracks with a width less than 3/8 inch. Medium slippage includes cracks between 3/8 and 1 1/2 inches or the area around the crack is moderately spalled or surrounded with secondary cracks. High slippage includes cracks greater than 1 1/2 inches or the area around the crack is broken into easy to remove pieces.

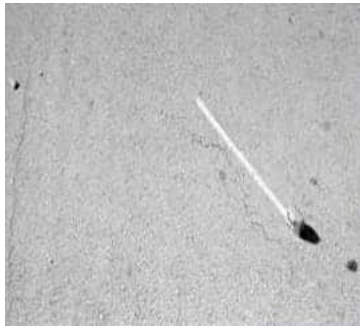


Figure 12 Low Slippage
 PAVER™ Distress Identification Manual



Figure 13 Medium Slippage
 PAVER™ Distress Identification Manual



Figure 14 High Slippage
 PAVER™ Distress Identification Manual

Repair

Slippage cracks can be repaired by removing the overlay surface and resurfacing with the appropriate bonding coat.

Depressions

Depressions are localized pavement surfaces with elevations slightly lower than those of the surrounding pavement. Depressions are usually not noticeable until after a rain event, when ponding water creates a small pool in the pavement. On dry pavement, depressions can be spotted by stains caused by ponding water. Depressions are typically caused by the settlement of the foundation soil or may be a result of improper construction. Severity levels are based on the maximum depth of depression with low between 1/2 to 1 inch, medium between 1 and 2 inches, and high greater than 2 inches.



Figure 15 Low Depression
 PAVER™ Distress Identification Manual



Figure 16 Medium Depression
 PAVER™ Distress Identification Manual



Figure 17 High Depression
 PAVER™ Distress Identification Manual

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 6
 December 5, 2024

Repair

Depending on the severity, pavement depressions can be repaired with a mill and overlay or a thin surface patch.

CRACKING

Transverse or Longitudinal

Transverse cracks extend across the pavement at approximately right angles to the centerline of the pavement surface. These types of cracks are not usually load associated and are generally caused by movement of the pavement because of temperature changes and shrinkage of asphalt over time. Transverse cracks will often be regularly spaced and if not properly sealed and maintained, may develop secondary cracks parallel to the initial crack.

Longitudinal cracks are cracks parallel to the pavement's centerline or laydown directions. These cracks are usually caused by inadequate bonding of the paving lane joint during construction or shrinkage of the asphalt surface because of lower temperatures. Longitudinal cracks within one foot of traffic wheel paths indicate fatigue from heavy vehicle loading while longitudinal cracks within one foot of the edge of pavement indicate insufficient shoulder support or poor drainage.

Severity levels of transverse or longitudinal cracks are based on the width of the crack. Low cracking includes cracks that are less than 3/8 inch or a filled crack of any width. Medium cracking includes cracks that are between 3/8 and 3 inches or a filled crack of any width surrounded by light random cracking. High cracking includes cracks that are greater than 3 inches or a crack of any width where the surrounding pavement is severely broken. See Figures 18, 19, and 20 for transverse and longitudinal (T&L) cracking severities.



Figure 18 Low T&L Cracking
 PAVER™ Distress Identification Manual



Figure 19 Medium T&L Cracking
 PAVER™ Distress Identification Manual



Figure 20 High T&L Cracking
 PAVER™ Distress Identification Manual

Repair

Isolated transverse cracks can be repaired with crack sealing. More frequent and severe transverse cracks that are surrounded by additional cracks may necessitate base or subgrade repairs, drainage repairs, level binder, and reflective crack control and overlay.

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 7
 December 5, 2024

Low to medium longitudinal cracking can be repaired with crack sealing or microsurfacing for edge-to-edge surface sealing. High longitudinal cracking requires a full pavement reconstruction including base or subgrade repairs, drainage repairs, and a binder and surface course.

Block

Block cracks are interconnected cracks from other failures that divide the pavement into rectangular pieces. Cracks usually intersect at approximately right angles and may range in size from 1 by 1 foot to 10 by 10 feet. Block cracking is not load associated and is typically caused by shrinkage of the asphalt and daily temperature changes. This type of distress usually indicates that asphalt has hardened significantly. Severity levels of block cracking follow the same convention as transverse and longitudinal cracking.



Figure 21 Low Block Cracking
PAVER™ Distress Identification Manual



Figure 22 Medium Block Cracking
PAVER™ Distress Identification Manual



Figure 23 High Block Cracking
PAVER™ Distress Identification Manual

Repair

Low to medium block cracking can be repaired with seal coating or microsurfacing. High block cracking may require a seal coat and overlay or a full reconstruction.

Alligator

Alligator cracking is a series of interconnected cracks typically caused by fatigue failure of the asphalt surface under repeated traffic loading. Cracking begins at the bottom of the asphalt surface where tensile stress and strain are highest under a wheel load. The cracks spread to the surface initially as a series of parallel longitudinal cracks and begin to connect under repeated traffic loading. Low alligator cracking is defined as fine, longitudinal hairline cracks that run parallel to each other and are not connected or spalled. Medium alligator cracking encompasses a network of connecting cracks that may be lightly spalled. High alligator cracking is composed of a network of connecting cracks with well-defined pieces that are spalled at the edges. Some of the pieces may rock under traffic.

Mr. Mark Labno, Township Highway Commissioner
Lemont Township
Page 8
December 5, 2024



Figure 24 Low Alligator Cracking PAVERTM Distress Identification Manual



Figure 25 Medium Alligator Cracking PAVERTM Distress Identification Manual



Figure 26 High Alligator Cracking PAVERTM Distress Identification Manual

Repair

Low to medium alligator cracking can be repaired with full-depth patching while severe alligator cracking may require a full reconstruction.

Edge

Edge cracks are parallel to and usually within 1 to 1 1/2 feet of the outer edge of the pavement. This distress is generally caused by a frost-weakened base or subgrade near the edge of the pavement and can be accelerated by traffic loading. Low edge cracking includes low to medium cracking (see T&L cracking severities) with no breakup or raveling. Medium edge cracking includes medium cracks with some breakup and raveling. High edge cracking is defined as considerable breakup or raveling along the edge of pavement.

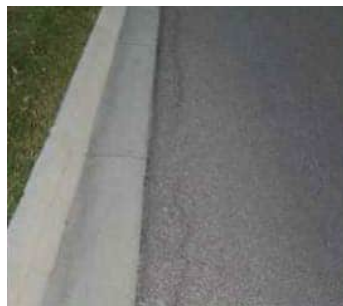


Figure 27 Low Edge Cracking PAVERTM Distress Identification Manual



Figure 28 Medium Edge Cracking PAVERTM Distress Identification Manual



Figure 29 High Edge Cracking PAVERTM Distress Identification Manual

Repair

Depending on the severity, edge cracking can be repaired by removing the vegetation close to the edge and filling the crack with an asphalt emulsion slurry or emulsified asphalt. Crack seal can also be used.

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 9
 December 5, 2024

OTHER

Potholes

Potholes are small, bowl-shaped depressions in the pavement surface that are often caused by traffic loading, fatigue, and inadequate strength of the pavement. They generally have sharp edges and vertical sides near the top of the hole. Severity levels, as summarized in Table 1, are based on both the size and diameter of the pothole.

Maximum Depth (in)	Average Diameter (in)		
	4 to 8	8 to 18	18 to 30
1/2 to ≤ 1	Low	Low	Medium
> 1 to ≤ 2	Low	Medium	High
> 2	Medium	Medium	High

In=inches
Table 1 Levels of Severity for Potholes



Figure 30 Low Pothole
 PAVER™ Distress Identification Manual



Figure 31 Medium Pothole
 PAVER™ Distress Identification Manual



Figure 32 High Pothole
 PAVER™ Distress Identification Manual

Repair

Localized potholes should be excavated and filled, while more severe and extensive potholes may require full reconstruction.

Patches

A patch is an area of pavement that has been replaced with new material to repair the existing pavement. A patch is considered a defect no matter how well it performs, as there is generally some roughness associated with the ride quality. Patches with cracking, settlement or distortions indicate the underlying causes of the pavement defect have not been resolved. Severity levels of patches are defined by the ride quality and condition of the patch.

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 10
 December 5, 2024



Figure 33 Low Patch
 PAVERTM Distress Identification Manual



Figure 34 Medium Patch
 PAVERTM Distress Identification Manual



Figure 35 High Patch
 PAVERTM Distress Identification Manual

Repair

Reconstruction may be required when extensive patching shows distress.

Lane or Shoulder Drop-Off

Lane or shoulder drop-off is a difference in elevation between the pavement edge and the shoulder. This distress is generally caused by shoulder erosion, shoulder settlement, or by building up the roadway without adjusting the shoulder level. Low lane or shoulder drop-off has an elevation difference less than 1 inch between the pavement edge and shoulder. Medium and severe lane or shoulder drop-off have respective elevation differences of 2 to 4 inches and greater than 4 inches between the pavement edge and shoulder.



Figure 36 Low Drop-Off
 PAVERTM Distress Identification Manual



Figure 37 Medium Drop-Off
 PAVERTM Distress Identification Manual



Figure 38 High Drop-Off
 PAVERTM Distress Identification Manual

Repair

Partial and full-depth patching can be used to correct lane/shoulder drop off. The addition of shoulder material can also be used to correct shoulder drop-off conditions.

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 11
 December 5, 2024

RATINGS AND RESULTS

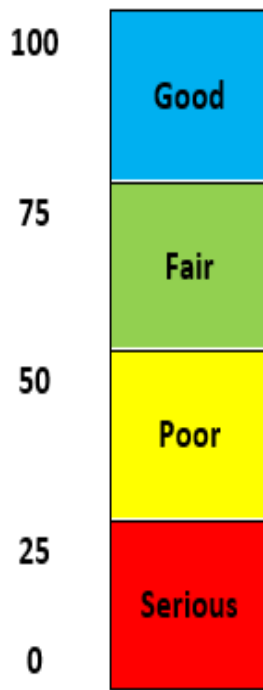


Figure 39 Custom PCI Rating Scale for Township

PAVER™ uses a standard PCI rating scale that groups pavements into seven categories ranging from “Good” (100) to “Failed” (0). The software also allows users to customize a PCI rating scale to report analysis results. For this analysis, the PCI rating scale depicted in Figure 39 was used.

Appendix B and C provide the Existing Pavement Condition Ratings and Roadway Maps, respectively. Appendix B also includes the 2019 PCI ratings for comparison to this evaluation. Eleven roads (117th Street, 118th Street, 119th Street, 121st Street, Center Drive, Hillcrest Drive, Connacht Street, Emerald Drive, Leinster Drive, Munster Road, and Shannon Court) have been repaired and resurfaced since the 2019 pavement evaluation and now reflect much higher PCI ratings. Additionally, several other roadways received spot patch repairs to fix high distresses and consequently reflect a slightly higher PCI rating than in 2019. Overall, the average PCI rating for the 2024 pavement evaluation was 52, which is down from 2019 pavement evaluation PCI average of 55.

With 52 percent of the road sections having a PCI rating between 26 and 50, more than one-half of the Township’s roadways are considered to be in “Poor” condition. Correspondingly, 20 percent of the roadways are in “Good” condition, 22 percent are in “Fair” condition, and only 6 percent are in “Serious” condition. Examples of the four conditions are depicted in Figures 40 through 43. Two roads (Grant Road and Archer Avenue Access) were not inspected because they led to private industrial properties.



Figure 4 Good Roadway Condition Equestrian Way



Figure 41 Fair Roadway Condition Apple Avenue

Mr. Mark Labno, Township Highway Commissioner
 Lemont Township
 Page 12
 December 5, 2024



Figure 42 Poor Roadway Condition Gordon Lane



Figure 43 Serious Roadway Condition 135th Street

Appendix D provides the type, quantity, and severity for each distress on a section. Crack sealant has been applied to a small percentage of roadways, which includes East Hunt Master Lane, Red Fox Court, East Red Coat Drive, North Red Coat Drive, South Red Coat Drive, South Silver Fox Drive, West Hunt Master Lane, and West Red Coat Drive. This crack sealant was not taken into account during evaluation; therefore, it should be noted that some distresses found on these roadways have already been addressed.

Distresses of particular note and concern are the high slippage cracks along East Red Coat Drive and West Briar Patch Lane and a severe pothole on Saddlebrook Lane. The areas of high slippage cracks on East Red Coat Drive and West Briar Patch Lane were previously noted in the 2019 pavement evaluation and are shown in Figures 44 and 45. The pothole on Saddlebrook Lane shown in Figure 46 extends almost across an entire travel lane and exposes the pavement fabric and base course of the road.



Figure 44 High Slippage Cracks on East Red Coat Drive



Figure 45 High Slippage Cracks on West Briar Patch Lane



Figure 46 Pothole on Saddlebrook Lane

REHABILITATION OPTIONS

Different maintenance and rehabilitation options are available for different pavement conditions to prolong pavement life. Pavements in Good condition with a PCI greater than 75 require routine maintenance, such as crack sealing. Pavements in Fair condition with a PCI between 51 and 75 require preservative treatments such as crack sealing, seal coating, or a pavement rejuvenator. Pavements in Poor condition with a PCI between 26 and 50 require structural improvements such as patching repairs or mill

Mr. Mark Labno, Township Highway Commissioner
Lemont Township
Page 13
December 5, 2024

and overlay. Pavements in Serious condition with a PCI of 25 or less require full reconstruction. Pavements will continue to deteriorate over time; therefore, pavement observations should continue at regular intervals. Roadways showing signs of additional distresses shall be evaluated for rehabilitation to return them to a service level acceptable by the Township.

The PAVER™ program offers a maintenance and repair (M&R) work planning tool that schedules, budgets, and analyzes alternative work plans for the roadway network. Pavement repairs suggested in the plans include stopgap, preventative, global M&R, and major below critical PCI work. The critical PCI value was set at 50 for this evaluation. Stopgap work should be applied to roadways below the critical PCI and consist of localized repairs needed to keep the pavement in a safe and operational condition (such as filling potholes). Preventative work should be applied to roadways above the critical PCI and consist of localized repairs aimed at slowing the rate of pavement deterioration (such as spot crack sealing or patching). Global M&R work is similar to preventative work but is applied to the entire pavement section. Major below critical work should be applied to roadways below the critical PCI and aim to improve structural requirements of the entire section (such as mill and overlay or full reconstruction).

Appendix E provides three example 5-year work plan options prepared by the PAVER™ program for the Township and PCI condition distribution after 5 years. These work plans should be considered as estimates of cost and not Opinions of Probable Cost. A 3 percent inflation rate was applied to costs for each work plan. Work Plan Option No. 1 constrains the pavement repair budget to \$400,000 per year and consists of mainly stopgap, preventative, and global M&R work. The average PCI rating for Work Plan Option No. 1 after 5 years is 44, with a total cost of \$1.9 million. Work Plan Option No. 2 maintains an average PCI rating of 70 (± 3) each year while leaving the budget unconstrained. During the course of 5 years, Work Plan Option No. 2 is projected to cost approximately \$9.4 million, and the average PCI rating after 5 years will be 70. Work Plan Option No. 3 maintains all PCI ratings higher than 50 while leaving the budget unconstrained. The majority of the cost will occur in the first year for this option and is projected to cost approximately \$10.0 million during the course of 5 years, and the average PCI rating after 5 years is 83.

Many road districts will focus on a maintenance plan that repairs the worst roadways first; however, this method is not cost-effective. By spending funds on full reconstructions, road districts often have little to no funds remaining for less-expensive M&Rs. Consequently, roadways with a Fair PCI rating between 51 and 75 that would normally require maintenance such as crack sealing, would soon fall to a Poor PCI rating and degrade from a maintenance repair to a structural repair or possible full reconstruction. Road districts that address the pavements with the worst conditions first increase overall construction costs for the whole roadway system, while the majority of the roads continue to age and deteriorate. When road districts instead focus on maintaining roads at an average PCI rating higher than 70 by incorporating preventative treatments, it allows the road district to keep roads at an acceptable level of service and lower the total rehabilitation costs over the whole roadway system.

Mr. Mark Labno, Township Highway Commissioner
Lemont Township
Page 14
December 5, 2024

Please call 815-744-4200 with questions regarding this evaluation.

Sincerely,

STRAND ASSOCIATES, INC.®



Miranda J. Gollwitzer, P.E.



Anthony J. Spinelli, P.E., CFM

Enclosures

**APPENDIX A
ROADWAY INVENTORY**

APPENDIX A

Table 1: Roadway Inventory Data

BRANCH ID	BRANCH NAME	SECTION ID	FROM	TO	CONST DATE	LENGTH (FT)	WIDTH (FT)	LANES
01	117th St	1-1	WALKER ROAD	CENTER DRIVE	11/1/2020	806	19	2
02	118th St	2-1	WALKER ROAD	HILLCREST DRIVE	11/1/2020	1,058	18	2
03	119th St	3-1	WALKER ROAD	EAST OF 1035	11/1/2020	1,311	20	2
04	121st St	4-1	CULDESAC	HILLCREST DRIVE	11/1/2020	546	17	2
05	Center Dr	5-1	CULDESAC	121ST STREET	11/1/2020	2,897	19	2
06	Hillcrest Dr	6-1	118TH STREET	MCCARTHY ROAD	11/1/2020	2,287	20	2
07	Hillcrest Rd	7-1	CULDESAC	WALKER ROAD	10/1/2009	1,444	20	2
08	Oak Ave	8-1	CULDESAC	EAST OF 1317	10/1/2018	892	17	2
09	Apple Ave	9-1	CULDESAC	WALKER ROAD	11/1/2011	1,094	22	2
10	Pine Ave	10-1	CULDESAC	APPLE AVENUE	11/1/2011	1,540	20	2
11	Prairie Ct	11-1	CULDESAC	APPLE AVENUE	11/1/2011	1,536	22	2
12	Artesian St	12-1	BELL ROAD	WOODLAWN AVENUE	4/1/2005	798	17	2
13	Campbell St	13-1	BELL ROAD	WOODLAWN AVENUE	4/1/2005	806	18	2
14	Liberty Dr	14-1	BELL ROAD	CULDESAC	4/1/2005	1,206	21	2
15	Woodlawn Ave	15-1	CAMPBELL STREET	CULDESAC	4/1/2005	674	17	2
16	115th St	16-1	WOODVIEW LANE	STONE CREEK DRIVE	3/1/2002	1,835	23	2
16	115th St	16-2	STONE CREEK DRIVE	BELL ROAD	3/1/2002	1,798	28	2
17	Clearview	17-1	RUSTY ROAD	CULDESAC	3/1/2002	613	22	2
18	Dineff Rd	18-1	ILLINOIS ROUTE 83	115TH STREET	3/1/2002	2,974	23	2
19	North Trl	19-1	CULDESAC	RUSTY ROAD	3/1/2002	601	23	2
20	Rusty Rd	20-1	115TH STREET	DINEFF ROAD	3/1/2002	2,193	23	2
21	Silver Spur Rd	21-1	STONE CREEK DRIVE	RUSTY ROAD	7/1/2005	560	22	2
22	Stone Creek Dr	22-1	CULDESAC	115TH STREET	7/1/2005	2,267	22	2
23	Timberview	23-1	CULDESAC	RUSTY ROAD	3/1/2002	390	23	2
24	Brookside Dr	24-1	STONE CREEK DRIVE	115TH STREET	3/1/2002	2,101	23	2
25	Martin Ct	25-1	ILLINOIS ROUTE 83	CULDESAC	10/1/2019	408	22	2
26	Waitkus Dr	26-1	WOODVIEW LANE	BROOKSIDE DRIVE	3/1/2002	594	23	2
27	Woodview Ln	27-1	ILLINOIS ROUTE 83	115TH STREET	3/1/2002	2,590	22	2
28	Bell Oak Ln	28-1	CULDESAC	BELL ROAD	4/1/2005	838	21	2
29	Buckskin	29-1	CULDESAC	HORSESHOE LANE	3/1/2002	445	20	2
30	Carriage Ln	30-1	EQUESTRIAN WAY	BELL ROAD	10/1/2019	1,004	22	2
31	Chestnut	31-1	CARRIAGE LANE	CULDESAC	10/1/2019	356	22	2
32	Equestrian Way	32-1	HORSESHOE LANE	SURREY ROAD	10/1/2019	2,665	23	2
33	Golden Spur	33-1	RIVA RIDGE	CULDESAC	4/1/2005	465	21	2
34	Horseshoe Ln	34-1	NORTH OF RIVA RIDGE	BELL ROAD	3/1/2002	3,425	22	2
34	Horseshoe Ln	34-2	SOUTH OF RIVA RIDGE	BELL ROAD	3/1/2002	3,412	22	2
35	Huntsman Ln	35-1	HORSESHOE LANE	CULDESAC	3/1/2002	537	22	2
36	Lariat	36-1	CULDESAC	HORSESHOE LANE	4/1/2005	232	21	2
37	Paddock	37-1	HORSESHOE LANE	CULDESAC	3/1/2002	726	22	2
38	Paso Fino	38-1	NORTH HORSESHOE LANE	SOUTH HORSESHOE LANE	4/1/2005	1,206	22	2
39	Riva Ridge	39-1	HORSESHOE LANE	CULDESAC	4/1/2005	1,784	22	2
40	Sorrel	40-1	CULDESAC	PASO FINO	4/1/2005	460	21	2
41	Split Rail	41-1	HORSESHOE LANE	CULDESAC	3/1/2002	322	22	2
42	Stone Creek Dr	42-1	115TH STREET	HORSESHOE LANE	3/1/2002	520	22	2
43	Surrey Rd	43-1	EQUESTRIAN WAY	CULDESAC	10/1/2019	615	23	2
44	Galway Ct	44-1	GALWAY ROAD	SUN HILL LANE	4/1/2005	338	23	2
45	Galway Rd	45-1	MCCARTHY ROAD	SUN HILL LANE	4/1/2005	968	23	2
46	Galway Ln	46-1	CULDESAC	GALWAY ROAD	4/1/2005	222	23	2
47	Saddlebrook Ln	47-1	CULDESAC	MCCARTHY ROAD	4/1/2005	688	23	2
48	Sun Hill Ln	48-1	BELL ROAD	GALWAY ROAD	4/1/2005	736	23	2
49	E. Briar Patch Ln	49-1	MEADOW HILL LANE	EAST OF 13192	5/1/2016	675	23	2
49	E. Briar Patch Ln	49-2	WEST OF 13192	EAST OF 13222	10/1/2009	769	24	2
50	E. Hunt Master Ln	50-1	FOX HILL DRIVE	CULDESAC	5/1/2016	551	23	2
50	E. Hunt Master Ln	50-2	CULDESAC	EAST OF 13201	5/1/2016	451	24	2
50	E. Hunt Master Ln	50-3	WEST OF 13201	EAST OF 13436	10/1/2009	783	24	2
51	Fox Hill Ct	51-1	CULDESAC	FOX HILL DRIVE	5/1/2016	316	23	2
52	Fox Hill Dr	52-1	131ST STREET	NORTH OF 13320	10/1/2009	1,584	24	2
52	Fox Hill Dr	52-2	SOUTH OF 13320	SOUTH OF 13499	5/1/2016	1,760	24	2
53	Fox Tail Ln	53-1	131ST STREET	MEADOW HILL LANE	5/1/2016	422	24	2
54	Meadow Hill Ln	54-1	FOX HILL DRIVE	EAST OF 13195	5/1/2016	1,903	24	2
54	Meadow Hill Ln	54-2	WEST OF 13195	FOX HILL DRIVE	10/1/2009	382	24	2
55	Red Fox Ct	55-1	FOX HILL DRIVE	CULDESAC	10/1/2009	1,171	24	2
56	E. Red Coat Dr	56-1	131ST STREET	SOUTH RED COAT DRIVE	12/1/2005	2,314	21	2
57	Moorfield Ct	57-1	EAST RED COAT DRIVE	CULDESAC	4/1/2005	441	22	2
58	N. Red Coat Dr	58-1	SOUTH SILVER FOX DRIVE	WEST RED COAT ROAD	12/1/2005	637	21	2
59	S. Red Coat Dr	59-1	EAST RED COAT DRIVE	WEST RED COAT ROAD	12/1/2005	1,549	22	2

BRANCH ID	BRANCH NAME	SECTION ID	FROM	TO	CONST DATE	LENGTH (FT)	WIDTH (FT)	LANES
60	S. Silver Fox Dr	60-1	131ST STREET	WEST HUNT MASTER LANE	12/1/2005	1,882	21	2
61	W. Briar Patch Ln	61-1	WEST OF 13222	SOUTH SILVER FOX DRIVE	4/1/2005	1,253	22	2
62	W. Hunt Master Ln	62-1	WEST OF 13436	PARKER ROAD	12/1/2005	2,234	22	2
63	W. Red Coat Dr	63-1	NORTH RED COAT DRIVE	SOUTH RED COAT DRIVE	12/1/2005	1,276	23	2
64	Arctic Ct	64-1	CULDESAC	ARCTIC LANE	3/1/2012	254	23	2
65	Arctic Ln	65-1	NORTH SILVER FOX DRIVE	PARKER ROAD	3/1/2012	1,046	23	2
66	Black Fox Ln	66-1	DIXON WAY	131ST STREET	5/1/2008	579	23	2
67	Dixon Way	67-1	PARKER ROAD	CULDESAC	5/1/2008	1,912	22	2
68	Gray Ln	68-1	CULDESAC	NORTH SILVER FOX DRIVE	3/1/2012	271	23	2
69	Kitt Ln	69-1	PARKER ROAD	DIXON WAY	5/1/2008	1,754	24	2
70	N. Silver Fox Dr	70-1	PARKER ROAD	131ST STREET	3/1/2012	2,458	24	2
71	Nordic Ln	71-1	CULDESAC	KITT LANE	5/1/2008	250	24	2
72	Parker Rd	72-1	12910	131ST STREET	5/1/2008	1,603	24	2
73	Baltic Cir	73-1	CULDESAC	DERBY ROAD	4/1/2015	1,701	24	2
74	Birch Ct	74-1	HAWTHORNE DRIVE	CULDESAC	4/1/2015	319	23	2
75	Derby Rd	75-1	13130	13487	7/1/2005	2,091	24	2
76	Elm Ct	76-1	CULDESAC	HAWTHORNE DRIVE	4/1/2015	541	24	2
77	Hawthorne Dr	77-1	BALTIC CIRCLE	CULDESAC	4/1/2015	2,562	24	2
78	Oak Ct	78-1	HAWTHORNE DRIVE	CULDESAC	4/1/2015	219	24	2
79	Spruce Ct	79-1	CULDESAC	HAWTHORNE DRIVE	4/1/2015	330	24	2
80	Sylvan Woods Ct	80-1	HAWTHORNE DRIVE	CULDESAC	4/1/2015	244	24	2
81	Hickory Ave	81-1	MAPLE AVENUE	135TH STREET	7/1/2005	1,854	22	2
82	King Rd	82-1	CULDESAC	135TH STREET	4/1/2016	523	22	2
83	Maple Ave	83-1	131ST STREET	13470	7/1/2005	2,731	22	2
84	Fox Hollow Ln	84-1	CULDESAC	FOX LANE	4/1/2005	713	22	2
85	Fox Ln	85-1	131ST STREET	CULDESAC	4/1/2005	976	22	2
86	Angelico St	86-1	DA VINCI STREET	CULDESAC	6/1/2009	815	22	2
87	Da Vinci St	87-1	131ST STREET	ANGELICO STREET	6/1/2009	895	22	2
88	El Greco St	88-1	DA VINCI STREET	RAPHAEL STREET	6/1/2009	497	22	2
89	Raphael St	89-1	EL GRECO STREET	ANGELICO STREET	6/1/2009	694	24	2
90	Woodland Dr	90-1	CULDESAC	ARCHER AVENUE	10/1/2018	908	24	2
91	Katie Rd	91-1	CULDESAC	MELISSA DRIVE	4/1/2005	391	26	2
92	Melissa Dr	92-1	ARCHER AVENUE	CULDESAC	4/1/2005	665	24	2
93	Connacht St	93-1	EMERALD DRIVE	EAST OF 19	11/1/2023	914	24	2
94	Emerald Dr	94-1	SOUTH OF 1206	SHANNON COURT	11/1/2023	1,817	24	2
95	Leinster Dr	95-1	127TH STREET	SHANNON COURT	11/1/2023	2,025	24	2
95	Leinster Dr	95-2	WEST SHANNON COURT	EAST SHANNON COURT	11/1/2023	1,138	24	2
96	Munster Rd	96-1	WEST OF 182	EMERALD DRIVE	11/1/2023	299	31	2
97	Shannon Ct	97-1	EMERALD DRIVE	LEINSTER DRIVE	11/1/2023	638	24	2
98	131st Ct	98-1	GORDON LANE (NORTH)	GORDON LANE (MIDDLE)	4/1/2005	364	22	2
99	132nd Ct	99-1	GORDON LANE (MIDDLE)	CULDESAC	10/1/2005	257	24	2
100	133rd Ct	100-1	GORDON LANE (SOUTH)	CULDESAC	4/1/2005	451	24	2
101	Emily Ln	101-1	WEST OF 17	135TH STREET	10/1/2018	1,024	19	2
102	Gordon Ln (Middle)	102-1	131ST COURT	133RD COURT	4/1/2005	776	24	2
103	Gordon Ln (North)	103-1	1335	NORTH OF 1330	6/1/2009	441	24	2
104	Gordon Ln (South)	104-1	133RD COURT	135TH STREET	10/1/2005	1,528	24	2
105	Fairway Dr	105-1	1276	LONGWOOD WAY	10/1/2018	410	22	2
106	Longwood Way	106-1	END	SMITH ROAD	10/1/2018	2,516	23	2
107	Oakmont Ct	107-1	CULDESAC	LONGWOOD WAY	10/1/2018	362	20	2
108	Oakmont Dr	108-1	LONGWOOD WAY	VALLEY VIEW DRIVE	10/1/2018	485	23	2
109	Valley View Ct	109-1	CULDESAC	VALLEY VIEW DRIVE	10/1/2018	161	21	2
110	Valley View Dr	110-1	LONGWOOD WAY	SMITH ROAD	10/1/2018	2,817	20	2
111	Spyglass Ct	111-1	MCCARTHY ROAD	CULDESAC	4/1/2016	1,291	16	2
112	129th St	112-1	WEST OF 15326	STATE STREET	9/1/2011	1,661	17	2
113	130th Pl	113-1	LEMONT STREET	STATE STREET	4/1/2015	1,255	20	2
114	132nd St	114-1	WEST OF 15625	EAST OF 15922	4/1/1993	1,504	12	2
115	135th St	115-1	CULDESAC	HICKORY AVENUE	7/1/2005	891	19	2
115	135th St	115-2	HICKORY AVENUE	KING ROAD	4/1/2016	481	19	2
116	Archer Ave Access	116-1	BUILDINGS	ARCHER AVENUE	4/1/1993	474	16	2
117	Bell Rd	117-1	11092	11001	10/1/2007	284	19	2
118	Boyer St	118-1	CULDESAC	MAIN STREET	4/1/2005	955	17	2
119	Grant Rd	119-1	EAST OF RAILROADS	WEST OF RAILROADS	4/1/1993	183	14	2
120	Kotflin Rd	120-1	MAIN STREET	CULDESAC	4/1/1993	901	12	1
121	Oak Ln	121-1	ARCHER AVENUE	CULDESAC	10/1/2018	764	14	2
122	Walnut St	122-1	15525	15524	4/1/2015	417	18	2

APPENDIX B
EXISTING PAVEMENT CONDITION RATINGS

APPENDIX B








Table 1: Existing Pavement Condition Ratings


Branch ID	Branch Name	Section ID	Section Area (Sq. Ft)	Last Inspection Date	Age at Inspection (Years)	2024 PCI Rating	2024 PCI	2019 PCI
01	117th St	1-1	15,314	11/7/2024	4	Good	86	28
02	118th St	2-1	19,044	11/7/2024	4	Good	87	38
03	119th St	3-1	26,220	11/7/2024	4	Good	84	27
04	121st St	4-1	9,282	11/7/2024	4	Fair	75	28
05	Center Dr	5-1	55,043	11/7/2024	4	Good	86	26
06	Hillcrest Dr	6-1	45,740	11/7/2024	4	Good	82	35
07	Hillcrest Rd	7-1	28,880	11/7/2024	15	Fair	60	64
08	Oak Ave	8-1	15,164	11/7/2024	6	Good	90	98
09	Apple Ave	9-1	24,068	11/7/2024	13	Fair	62	64
10	Pine Ave	10-1	30,800	11/7/2024	13	Fair	71	82
11	Prairie Ct	11-1	33,792	11/7/2024	13	Fair	58	58
12	Artesian St	12-1	13,566	10/29/2024	20	Poor	33	55
13	Campbell St	13-1	14,508	10/29/2024	20	Poor	40	40
14	Liberty Dr	14-1	25,326	10/29/2024	20	Fair	60	62
15	Woodlawn Ave	15-1	11,458	10/29/2024	20	Poor	41	39
16	115th St	16-1	42,205	10/29/2024	23	Poor	47	43
16	115th St	16-2	50,344	10/29/2024	23	Poor	36	42
17	Clearview	17-1	13,486	10/29/2024	23	Poor	33	34
18	Dineff Rd	18-1	68,402	10/30/2024	23	Fair	72	84
19	North Trl	19-1	13,823	10/29/2024	23	Poor	26	23
20	Rusty Rd	20-1	50,439	10/29/2024	23	Poor	46	41
21	Silver Spur Rd	21-1	12,320	10/29/2024	19	Poor	38	27
22	Stone Creek Dr	22-1	49,874	10/29/2024	19	Poor	47	31
23	Timberview	23-1	8,970	10/29/2024	23	Serious	24	28
24	Brookside Dr	24-1	48,323	10/29/2024	23	Poor	49	32
25	Martin Ct	25-1	8,976	10/29/2024	5	Fair	72	100
26	Waitkus Dr	26-1	13,662	10/29/2024	23	Fair	52	62
27	Woodview Ln	27-1	56,980	10/29/2024	23	Poor	46	40
28	Bell Oak Ln	28-1	17,598	10/29/2024	20	Serious	23	29
29	Buckskin	29-1	8,900	10/29/2024	23	Poor	38	31
30	Carriage Ln	30-1	22,088	10/30/2024	5	Good	94	100
31	Chestnut	31-1	7,832	10/30/2024	5	Good	82	100
32	Equestrian Way	32-1	61,295	10/30/2024	5	Good	87	100
33	Golden Spur	33-1	9,765	10/29/2024	20	Poor	45	46
34	Horseshoe Ln	34-1	75,350	10/30/2024	23	Poor	42	48
34	Horseshoe Ln	34-2	75,064	10/29/2024	23	Poor	48	44
35	Huntsman Ln	35-1	11,814	10/29/2024	23	Poor	31	32
36	Lariat	36-1	4,872	10/29/2024	20	Poor	45	50
37	Paddock	37-1	15,972	10/29/2024	23	Poor	43	53
38	Paso Fino	38-1	26,532	10/29/2024	20	Poor	46	60
39	Riva Ridge	39-1	39,248	10/29/2024	20	Poor	44	38
40	Sorrel	40-1	9,660	10/29/2024	20	Poor	50	51
41	Split Rail	41-1	7,084	10/29/2024	23	Poor	38	38
42	Stone Creek Dr	42-1	11,440	10/29/2024	23	Fair	52	70
43	Surrey Rd	43-1	14,145	10/30/2024	5	Good	88	100
44	Galway Ct	44-1	7,774	10/29/2024	20	Serious	15	47
45	Galway Rd	45-1	22,264	10/29/2024	20	Poor	50	51
46	Galway Ln	46-1	5,106	10/29/2024	20	Fair	69	76
47	Saddlebrook Ln	47-1	15,824	10/29/2024	20	Poor	35	37
48	Sun Hill Ln	48-1	16,928	10/29/2024	20	Poor	42	48
49	E. Briar Patch Ln	49-1	15,525	10/30/2024	9	Good	81	87
49	E. Briar Patch Ln	49-2	18,456	10/30/2024	15	Poor	45	43
50	E. Hunt Master Ln	50-1	12,673	10/30/2024	9	Fair	69	74

Branch ID	Branch Name	Section ID	Section Area (Sq. Ft)	Last Inspection Date	Age at Inspection (Years)	2024 PCI Rating	2024 PCI	2019 PCI
50	E. Hunt Master Ln	50-2	10,824	10/30/2024	9	Good	76	81
50	E. Hunt Master Ln	50-3	18,792	10/30/2024	15	Poor	43	50
51	Fox Hill Ct	51-1	7,268	10/30/2024	9	Good	82	91
52	Fox Hill Dr	52-1	38,016	10/30/2024	15	Poor	43	41
52	Fox Hill Dr	52-2	42,240	10/30/2024	9	Good	76	86
53	Fox Tail Ln	53-1	10,128	10/30/2024	9	Good	78	94
54	Meadow Hill Ln	54-1	45,672	10/30/2024	9	Fair	75	89
54	Meadow Hill Ln	54-2	9,168	10/30/2024	15	Poor	50	60
55	Red Fox Ct	55-1	28,104	10/30/2024	15	Poor	45	44
56	E. Red Coat Dr	56-1	48,594	10/30/2024	19	Poor	37	40
57	Moorfield Ct	57-1	9,702	10/30/2024	20	Poor	39	41
58	N. Red Coat Dr	58-1	13,377	10/30/2024	19	Fair	53	69
59	S. Red Coat Dr	59-1	32,529	10/30/2024	19	Fair	59	65
60	S. Silver Fox Dr	60-1	39,522	10/30/2024	19	Fair	65	67
61	W. Briar Patch Ln	61-1	27,566	10/30/2024	20	Poor	36	40
62	W. Hunt Master Ln	62-1	49,148	10/30/2024	19	Fair	62	67
63	W. Red Coat Dr	63-1	28,072	10/30/2024	19	Fair	61	61
64	Arctic Ct	64-1	6,096	11/6/2024	13	Poor	36	38
65	Arctic Ln	65-1	26,150	10/30/2024	13	Poor	45	40
66	Black Fox Ln	66-1	15,054	11/6/2024	17	Poor	45	53
67	Dixon Way	67-1	47,800	10/30/2024	17	Poor	40	41
68	Gray Ln	68-1	6,504	11/6/2024	13	Poor	31	44
69	Kitt Ln	69-1	43,850	10/30/2024	17	Poor	43	43
70	N. Silver Fox Dr	70-1	61,450	10/30/2024	13	Poor	43	40
71	Nordic Ln	71-1	6,250	11/6/2024	17	Poor	40	81
72	Parker Rd	72-1	49,693	11/6/2024	17	Poor	40	40
73	Baltic Cir	73-1	37,422	11/6/2024	10	Poor	43	53
74	Birch Ct	74-1	7,018	11/6/2024	10	Poor	39	62
75	Derby Rd	75-1	43,911	11/6/2024	19	Serious	24	41
76	Elm Ct	76-1	11,902	11/6/2024	10	Poor	32	38
77	Hawthorne Dr	77-1	58,926	11/6/2024	10	Fair	53	72
78	Oak Ct	78-1	4,818	11/6/2024	10	Poor	41	70
79	Spruce Ct	79-1	6,930	11/6/2024	10	Poor	28	42
80	Sylvan Woods Ct	80-1	5,368	11/6/2024	10	Poor	47	78
81	Hickory Ave	81-1	29,664	11/6/2024	19	Poor	37	55
82	King Rd	82-1	9,414	11/6/2024	9	Poor	48	86
83	Maple Ave	83-1	60,082	11/6/2024	19	Serious	20	35
84	Fox Hollow Ln	84-1	19,964	11/6/2024	20	Poor	44	57
85	Fox Ln	85-1	27,328	11/6/2024	20	Poor	41	48
86	Angelico St	86-1	20,375	11/6/2024	15	Poor	40	48
87	Da Vinci St	87-1	22,375	11/6/2024	15	Poor	31	31
88	El Greco St	88-1	12,425	11/6/2024	15	Poor	28	34
89	Raphael St	89-1	17,350	11/6/2024	15	Poor	35	40
90	Woodland Dr	90-1	20,884	11/6/2024	6	Good	80	93
91	Katie Rd	91-1	8,993	11/6/2024	20	Poor	29	38
92	Melissa Dr	92-1	14,630	11/6/2024	20	Poor	47	51
93	Connacht St	93-1	19,194	11/7/2024	1	Good	84	37
94	Emerald Dr	94-1	38,157	11/7/2024	1	Good	88	52
95	Leinster Dr	95-1	44,550	11/7/2024	1	Good	89	42
95	Leinster Dr	95-2	22,760	11/7/2024	1	Good	88	43
96	Munster Rd	96-1	6,279	11/7/2024	1	Good	77	31
97	Shannon Ct	97-1	12,760	11/7/2024	1	Good	91	32
98	131st Ct	98-1	8,736	11/7/2024	20	Poor	42	50
99	132nd Ct	99-1	5,140	11/7/2024	19	Poor	42	42
100	133rd Ct	100-1	10,824	11/7/2024	20	Poor	42	41
101	Emily Ln	101-1	19,456	11/7/2024	6	Fair	70	91
102	Gordon Ln (Middle)	102-1	18,624	11/7/2024	20	Poor	35	39

Branch ID	Branch Name	Section ID	Section Area (Sq. Ft)	Last Inspection Date	Age at Inspection (Years)	2024 PCI Rating	2024 PCI	2019 PCI
103	Gordon Ln (North)	103-1	10,584	11/7/2024	15	Poor	40	52
104	Gordon Ln (South)	104-1	36,672	11/7/2024	19	Poor	35	41
105	Fairway Dr	105-1	9,020	11/7/2024	6	Good	79	94
106	Longwood Way	106-1	57,868	11/7/2024	6	Good	76	95
107	Oakmont Ct	107-1	7,240	11/7/2024	6	Fair	74	94
108	Oakmont Dr	108-1	11,155	11/7/2024	6	Good	77	100
109	Valley View Ct	109-1	3,381	11/7/2024	6	Fair	65	85
110	Valley View Dr	110-1	56,340	11/7/2024	6	Good	78	96
111	Spyglass Ct	111-1	20,656	10/30/2024	9	Fair	67	85
112	129th St	112-1	28,237	11/7/2024	13	Fair	53	65
113	130th Pl	113-1	25,100	11/7/2024	10	Fair	54	81
114	132nd St	114-1	18,048	11/7/2024	32	Serious	0	12
115	135th St	115-1	16,929	11/6/2024	19	Serious	3	35
115	135th St	115-2	9,139	11/6/2024	9	Fair	55	78
116	Archer Ave Access	116-1	7,584	4/1/1993	-	-	-	-
117	Bell Rd	117-1	5,396	10/29/2024	17	Poor	26	29
118	Boyer St	118-1	16,235	11/7/2024	20	Poor	29	32
119	Grant Rd	119-1	2,562	4/1/1993	-	-	-	-
120	Kotlin Rd	120-1	10,812	11/7/2024	32	Serious	4	6
121	Oak Ln	121-1	10,696	11/6/2024	6	Fair	67	100
122	Walnut St	122-1	7,506	11/7/2024	10	Fair	52	78

Legend

-  Village of Lemont Boundary
-  Lemont Township Boundary
-  Not Inspected
- PCI Rating**
-  Good (76-100)
-  Fair (51-75)
-  Poor (26-50)
-  Serious (0-25)


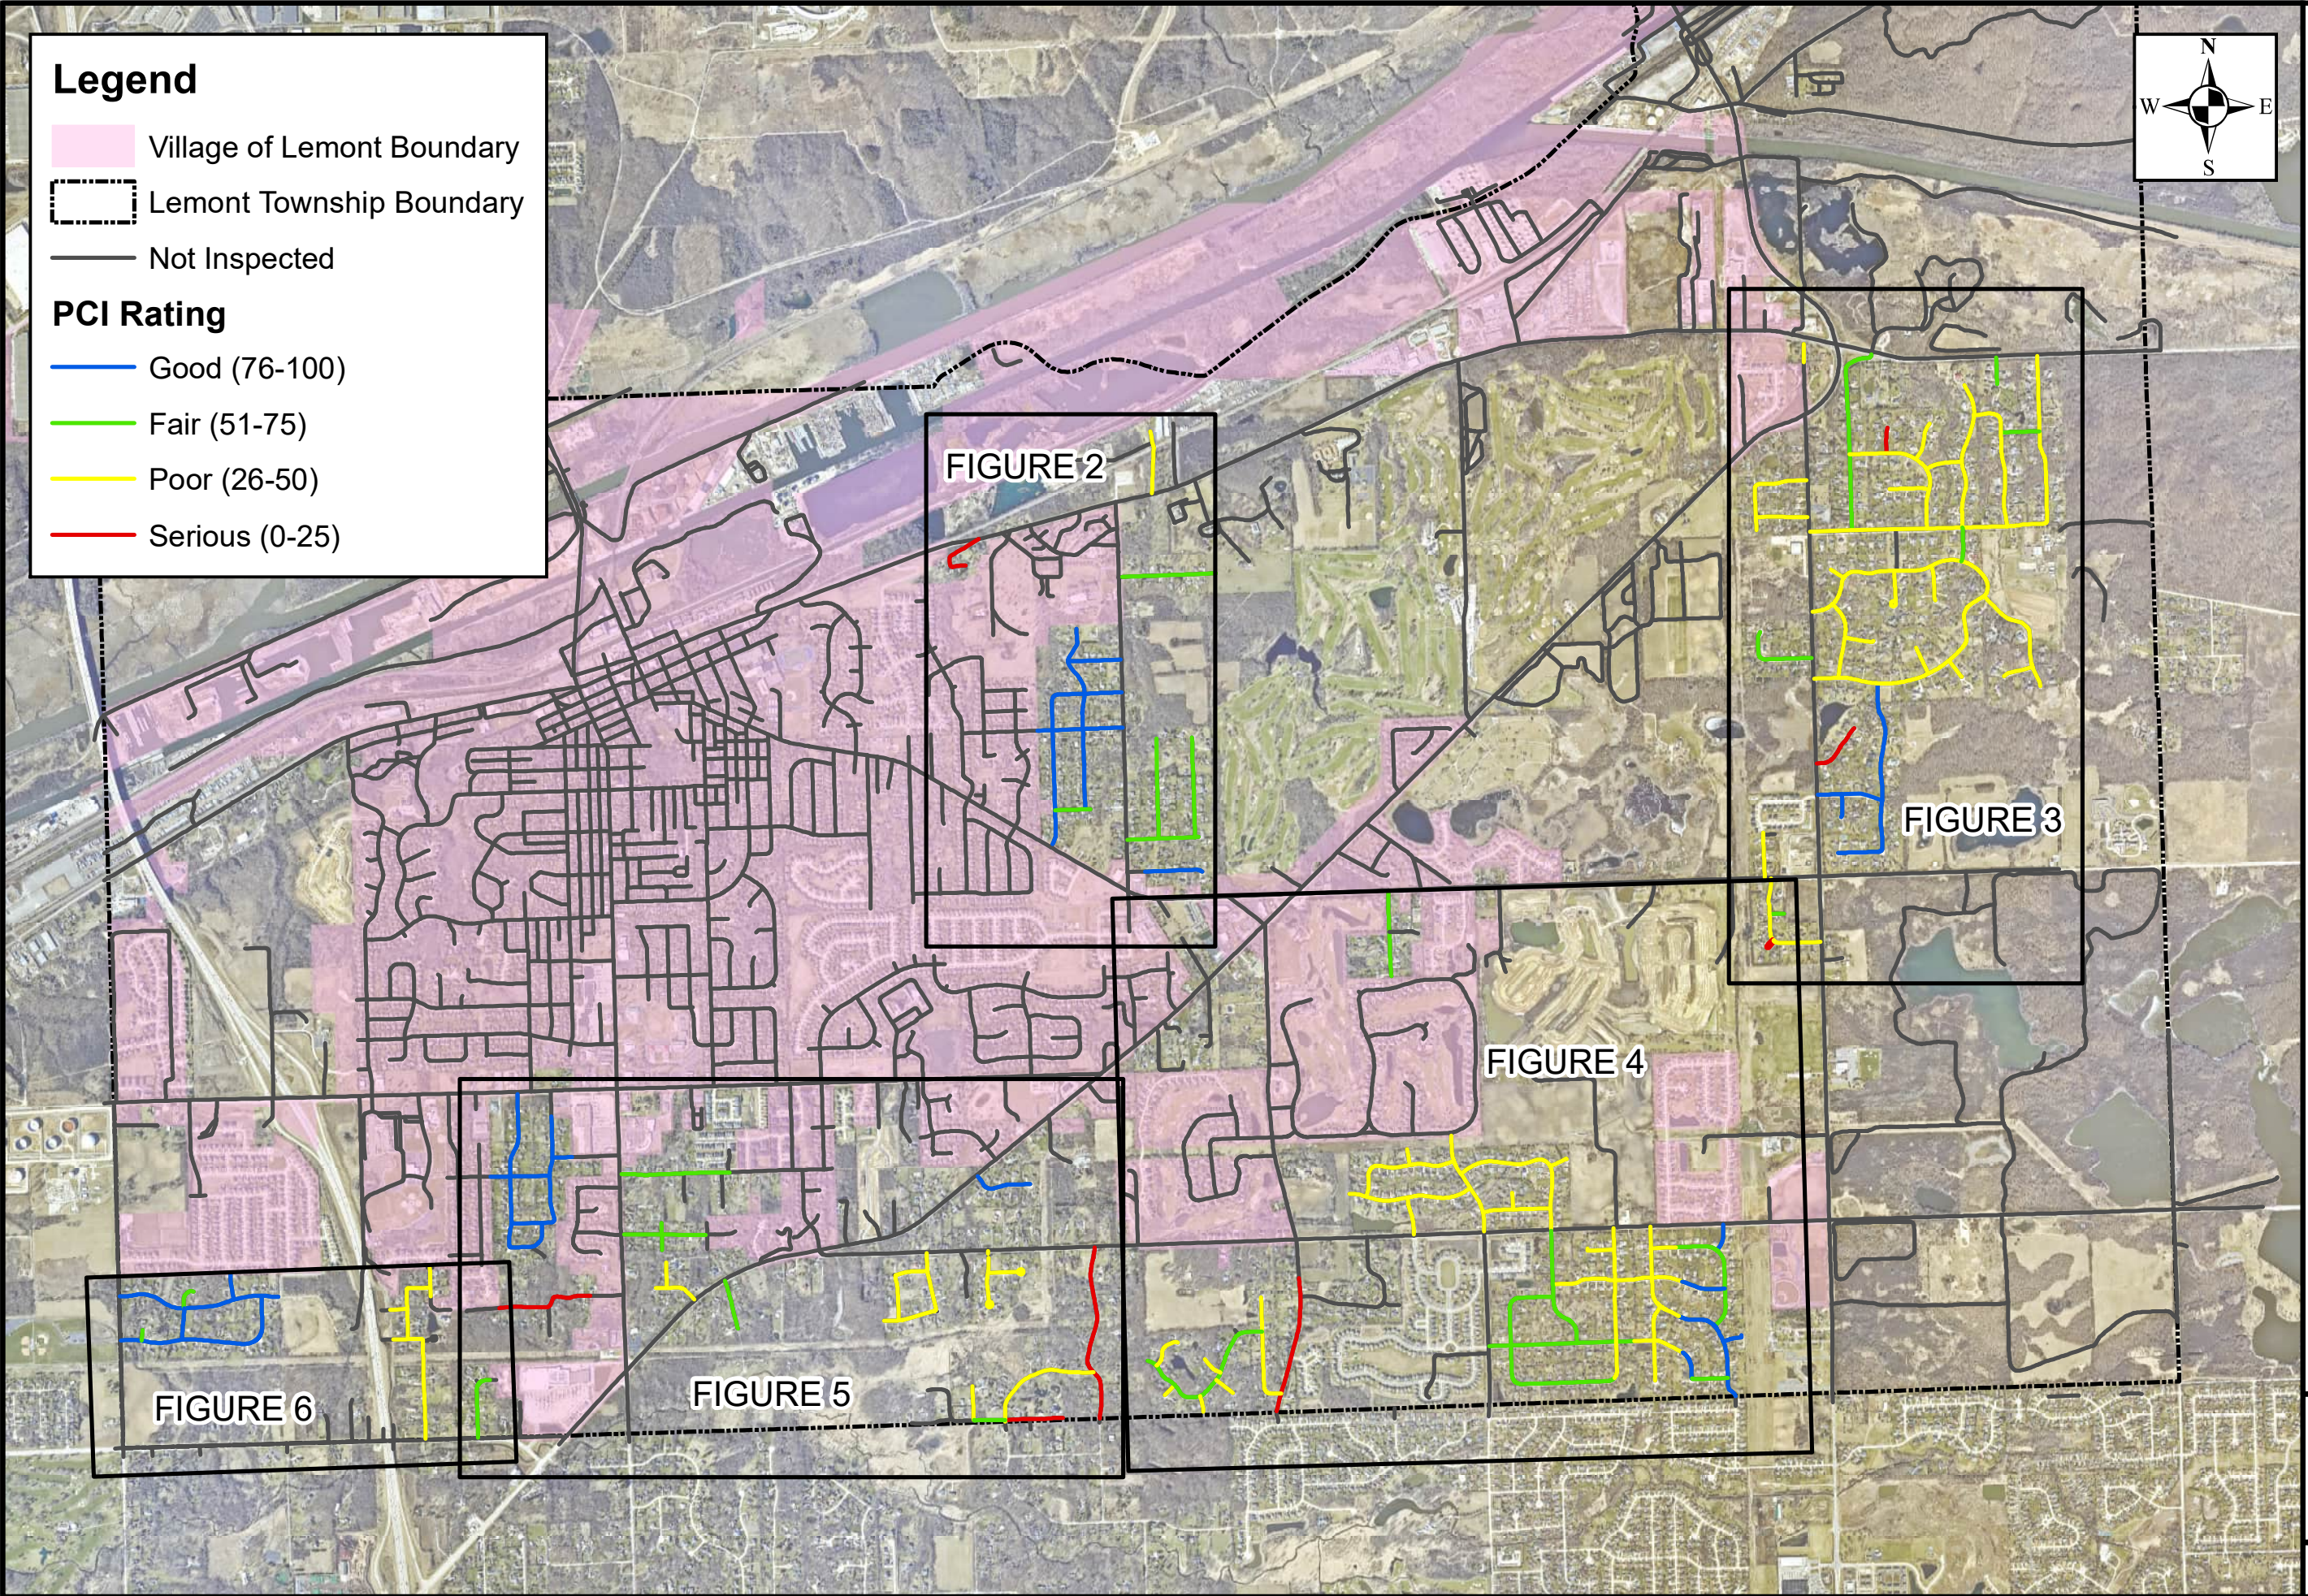


EXISTING PAVEMENT CONDITION RATINGS

2024 ROADWAY PAVEMENT EVALUATION
LEMONT TOWNSHIP
COOK COUNTY, ILLINOIS



FIGURE 1
4481.015

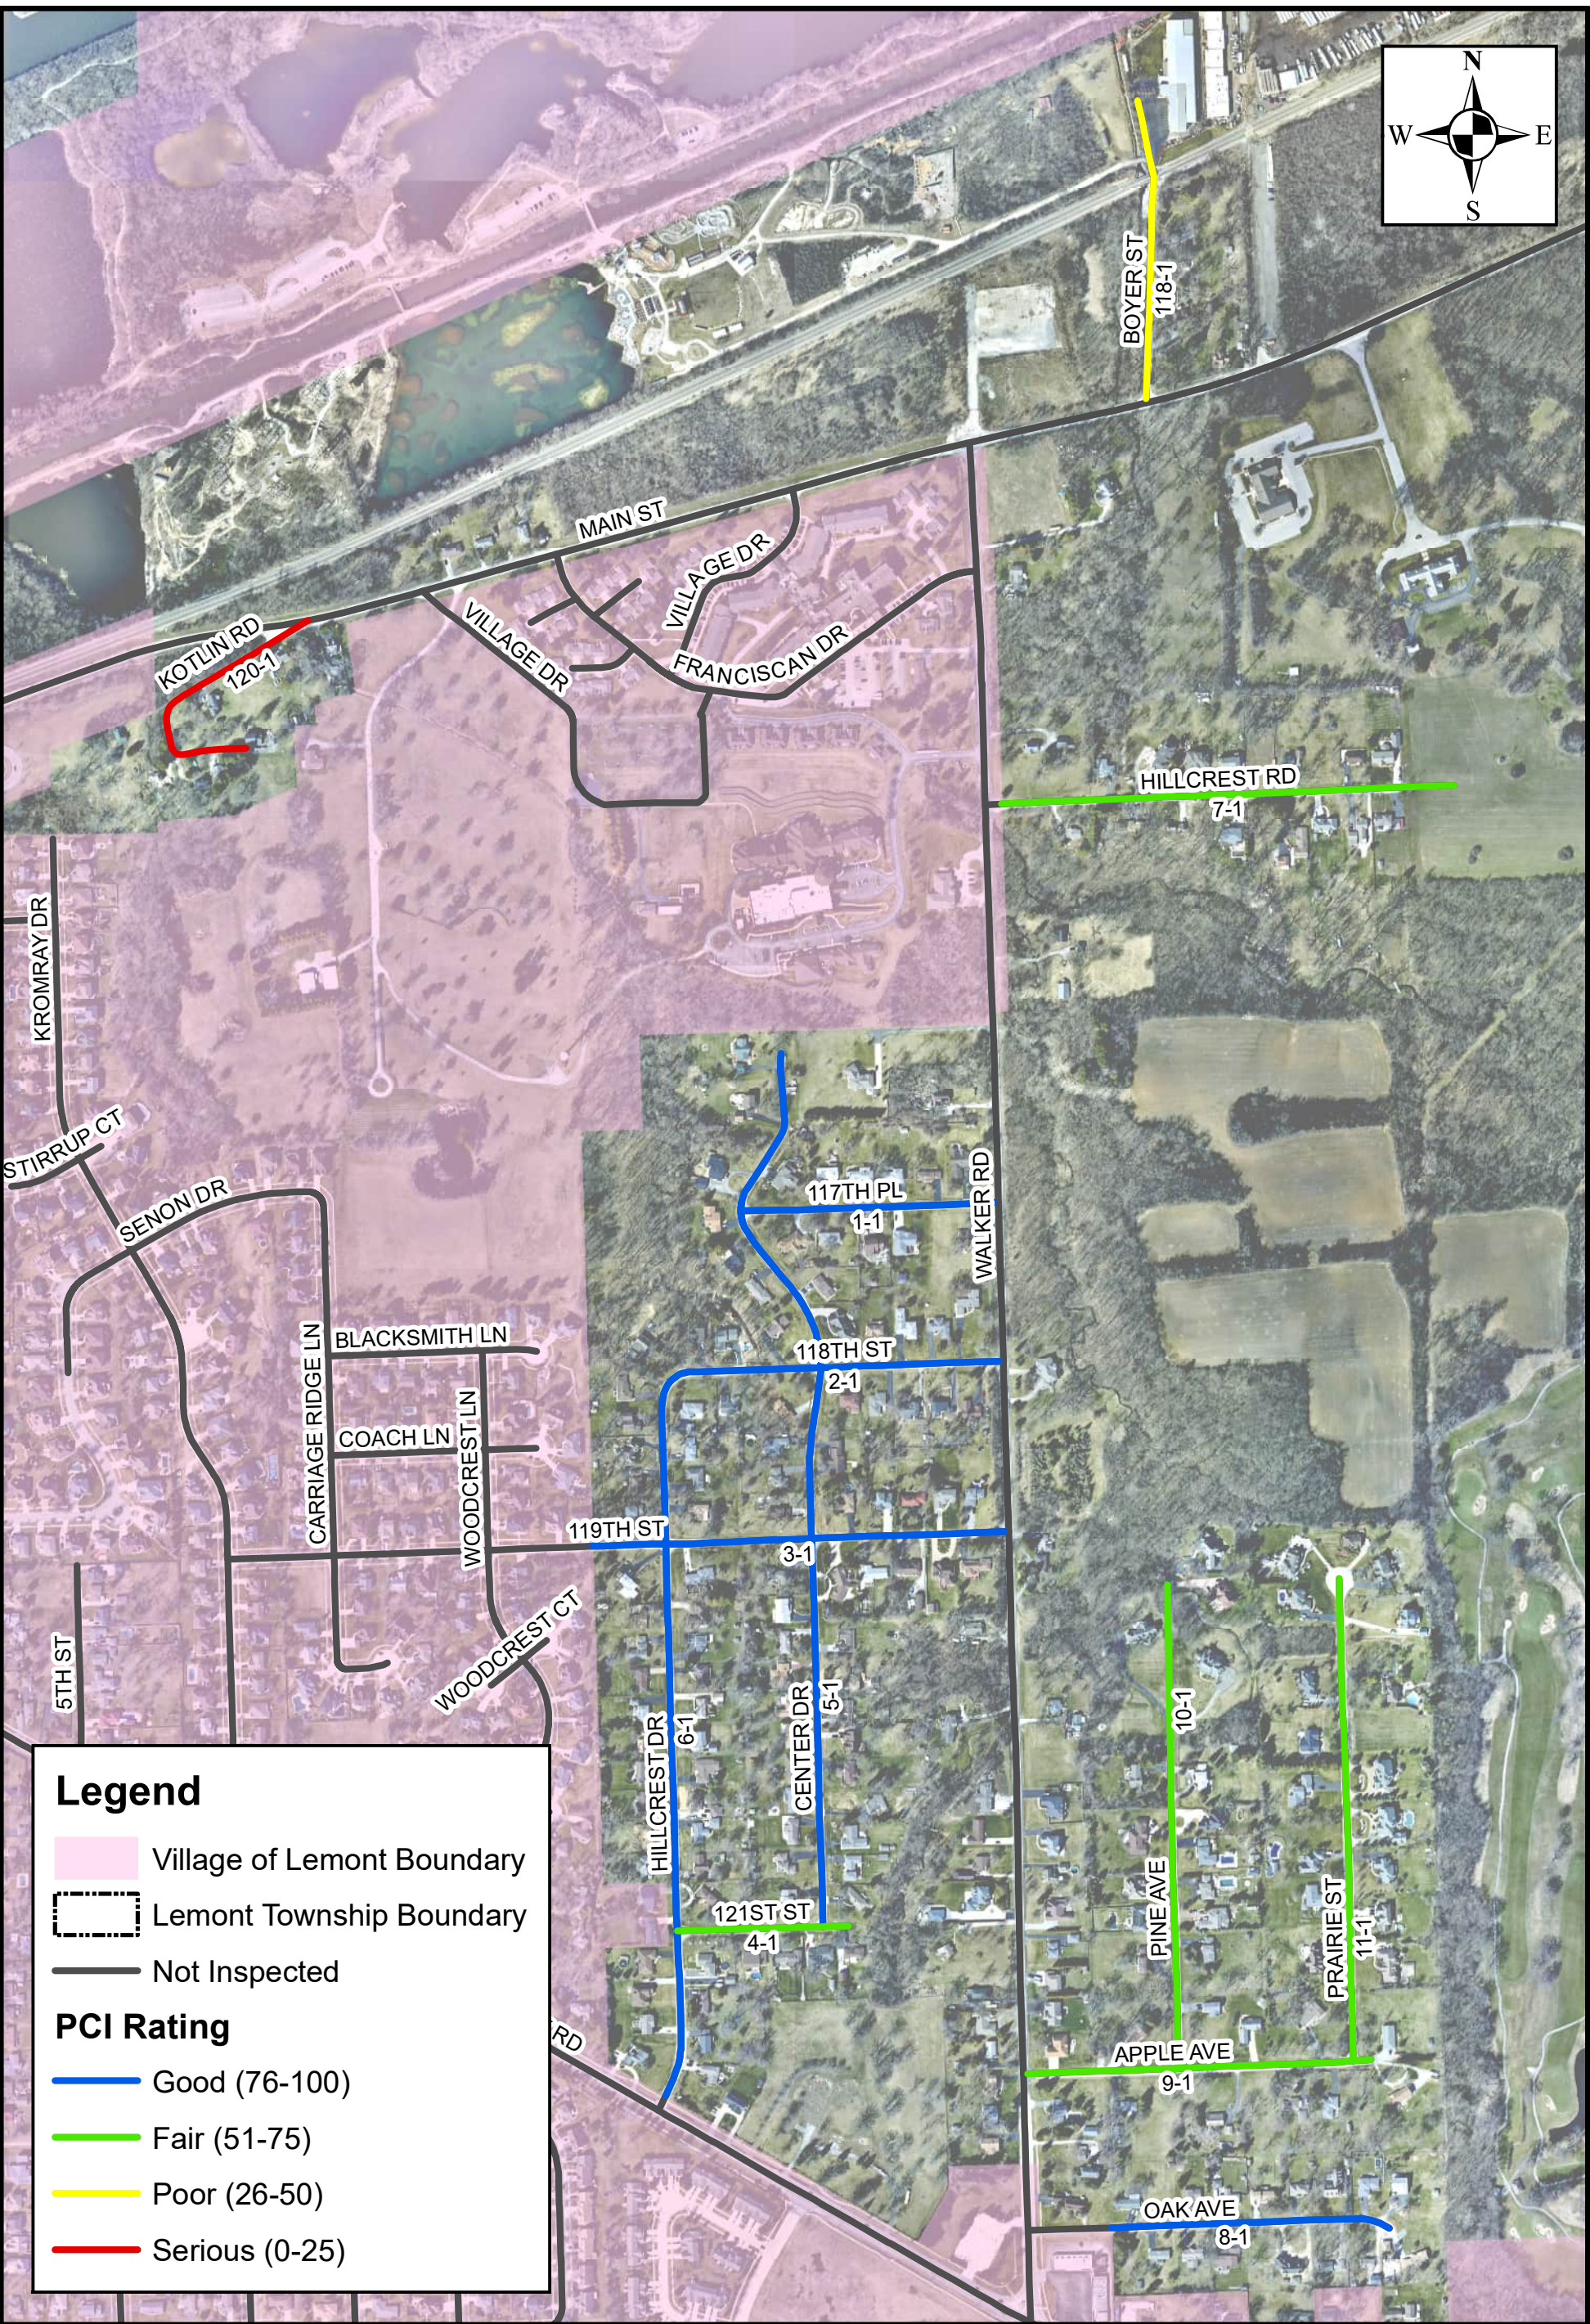

Legend

- Village of Lemont Boundary
- Lemont Township Boundary
- Not Inspected

PCI Rating



- Good (76-100)
- Fair (51-75)
- Poor (26-50)
- Serious (0-25)

HILLCREST SUBDIVISION AND INDEPENDENT ROADS

**2024 ROADWAY PAVEMET EVALUATION
LEMONT TOWNSHIP
COOK COUNTY, ILLINOIS**



STRAND ASSOCIATES
FIGURE 2
4481.015

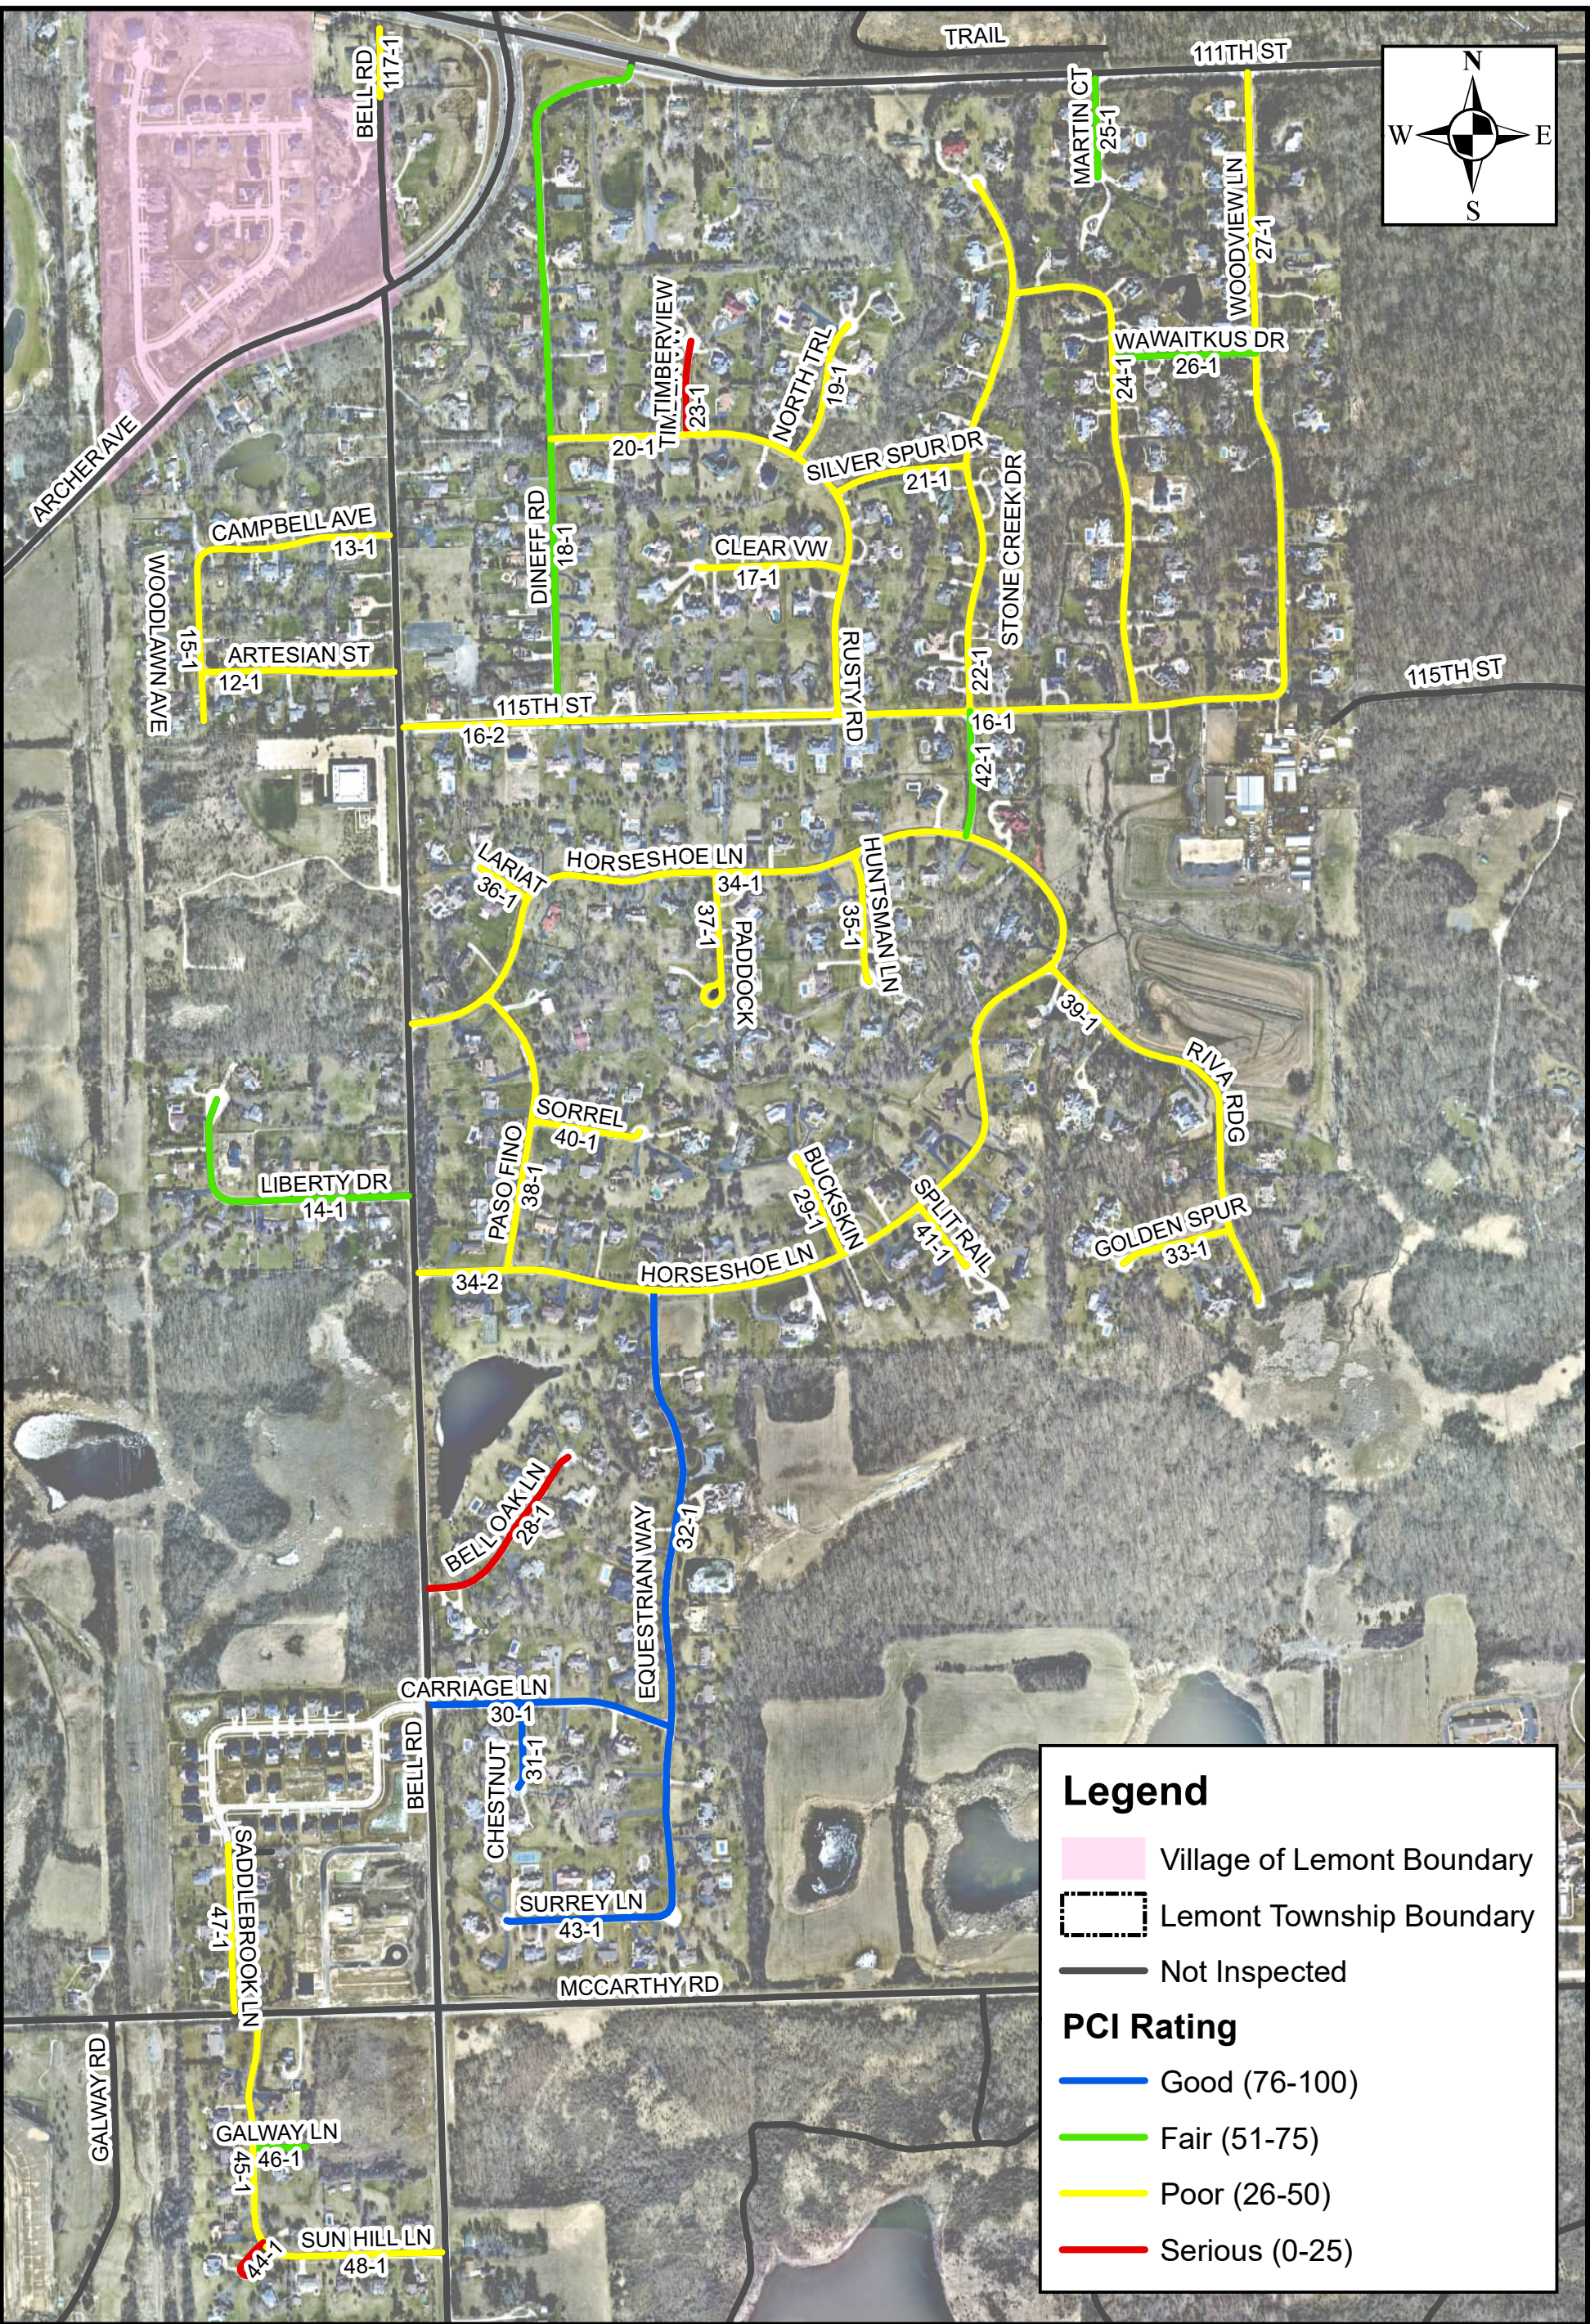

Legend


- Village of Lemont Boundary
- Lemont Township Boundary
- Not Inspected

PCI Rating

- Good (76-100)
- Fair (51-75)
- Poor (26-50)
- Serious (0-25)

**ANNE BELL ACRES, EQUESTRIAN (NORTH), EQUESTRIAN (SOUTH),
EQUESTRIAN WOODS, SADDLEBROOK SUBDIVISIONS, AND INDEPENDENT ROADS**

**2024 ROADWAY PAVEMET EVALUATION
LEMONT TOWNSHIP
COOK COUNTY, ILLINOIS**

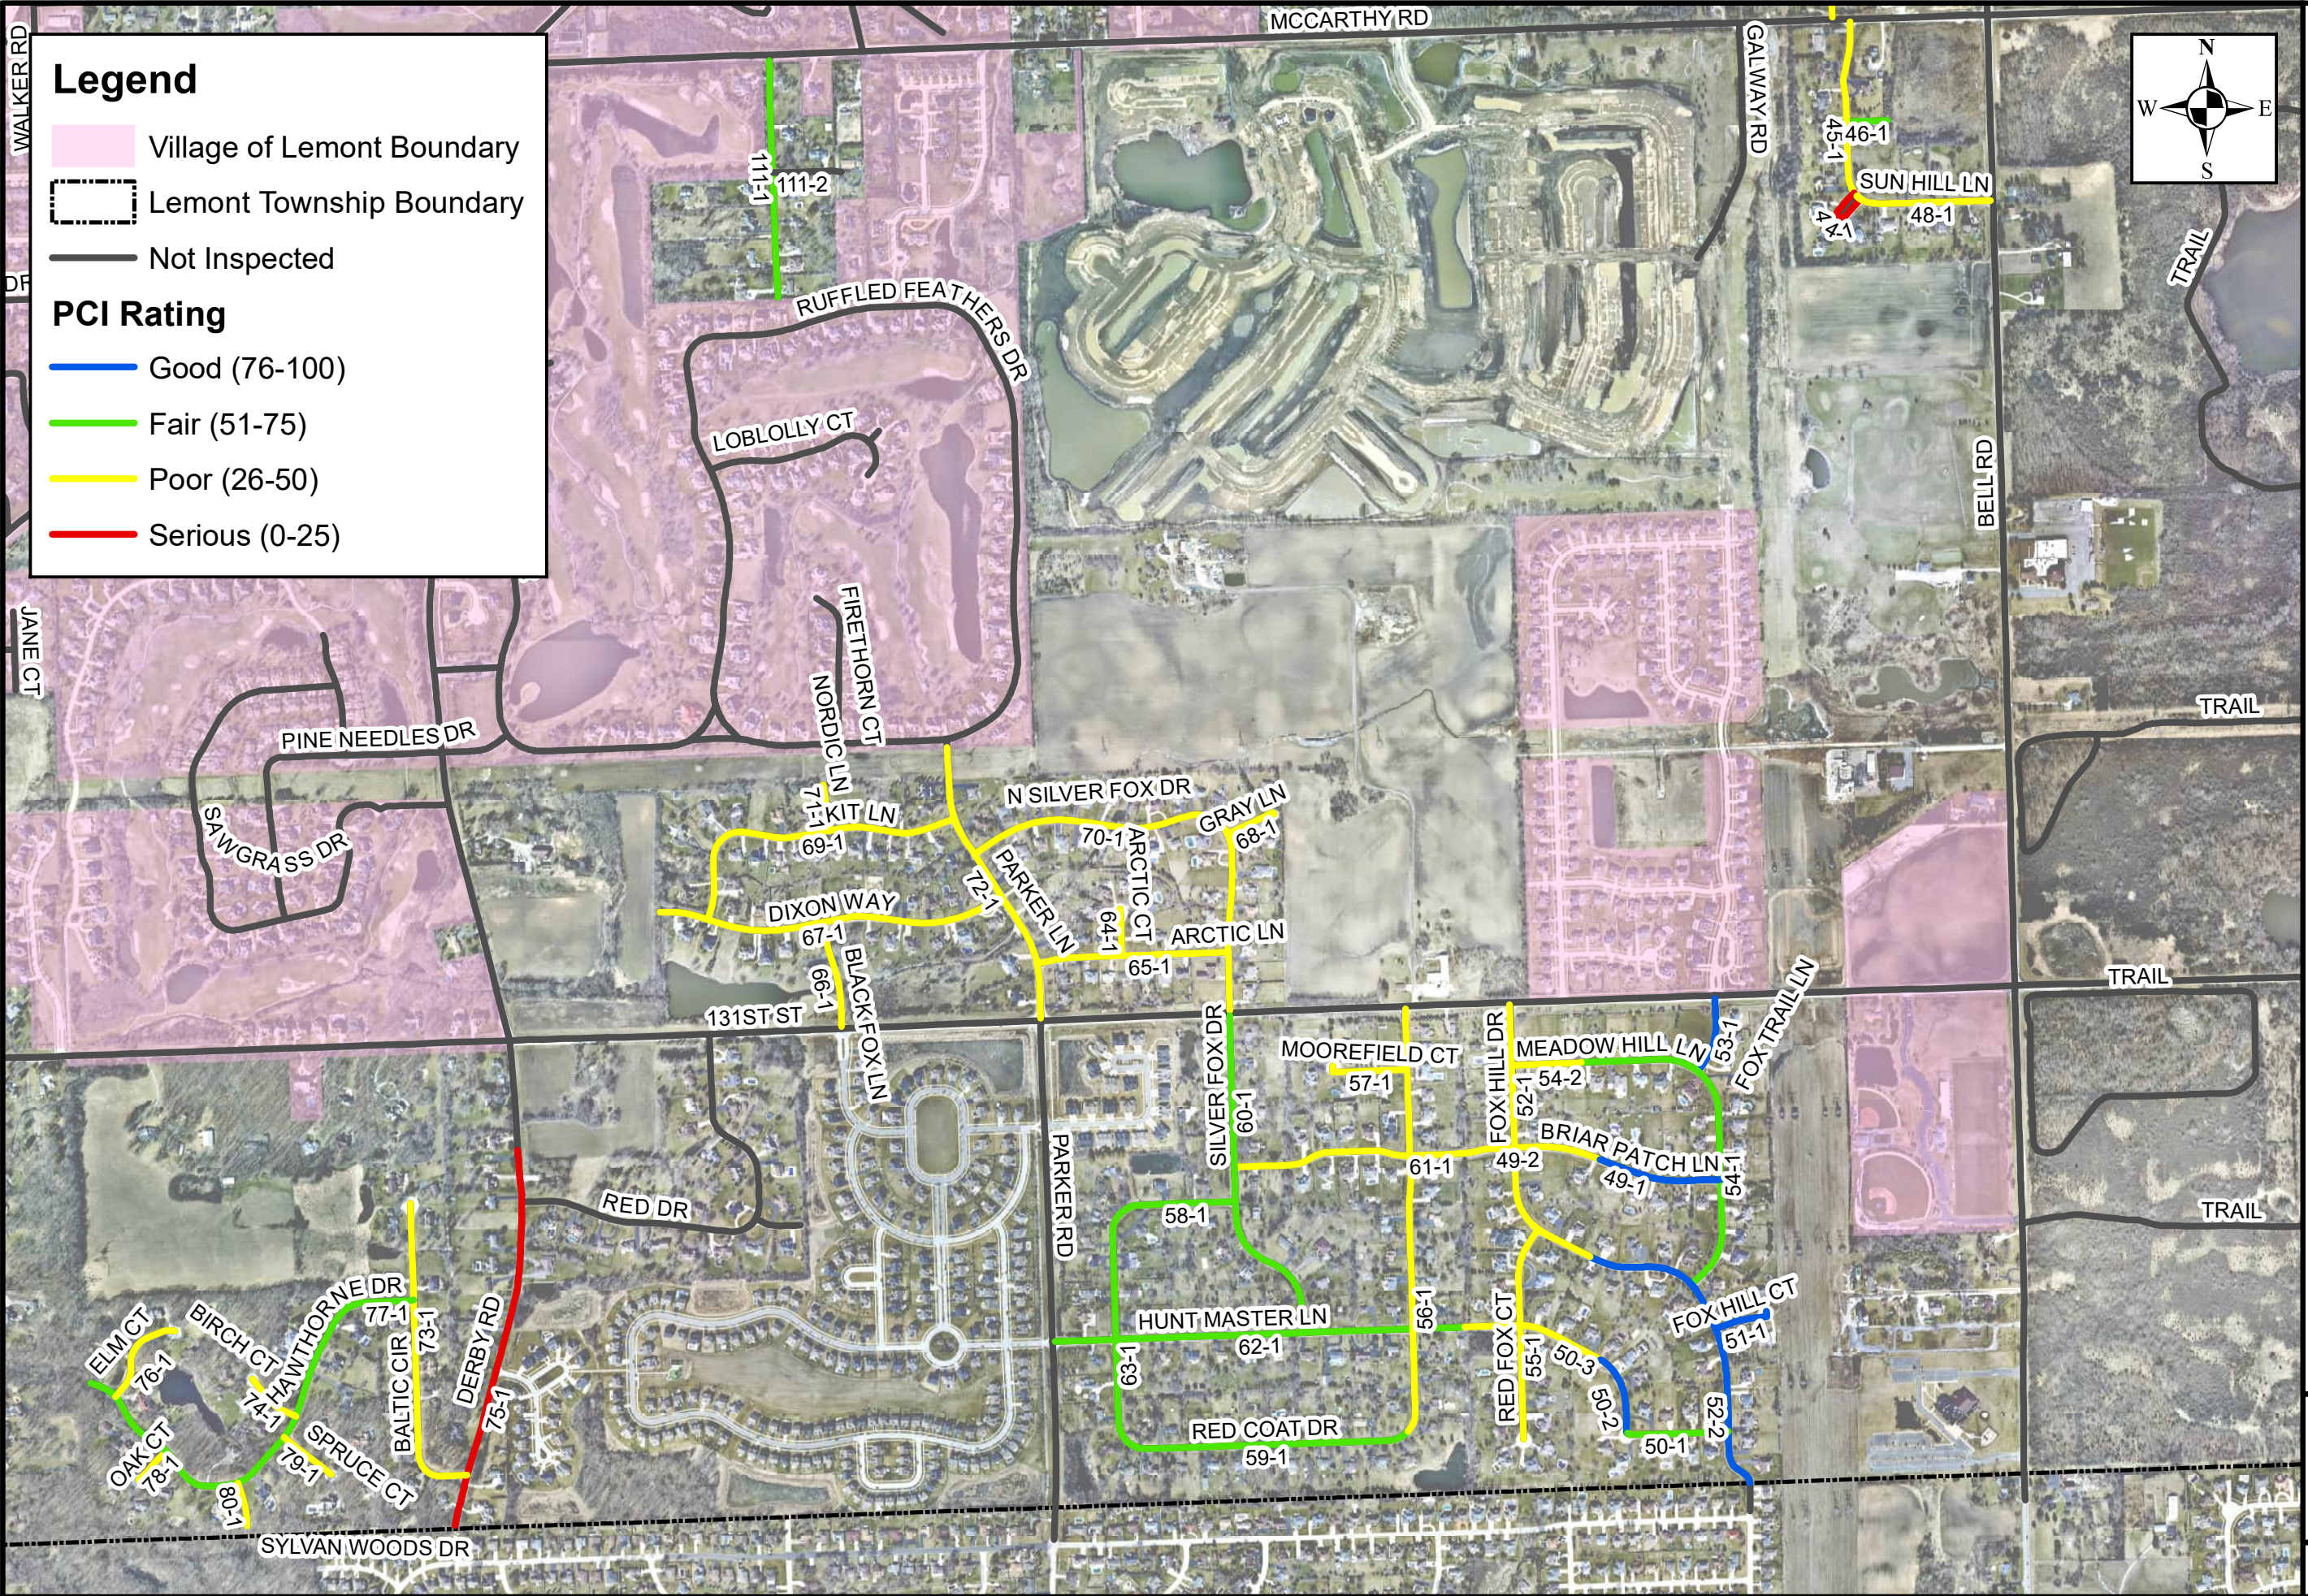

Legend

- Village of Lemont Boundary
 - Lemont Township Boundary
 - Not Inspected
- PCI Rating**
- Good (76-100)
 - Fair (51-75)
 - Poor (26-50)
 - Serious (0-25)




**FOX HILLS (NORTH), FOX HILLS (SOUTH), FOX POINTE
SPYGLASS, AND SYLVAN WOODS SUBDIVISIONS**

2024 ROADWAY PAVEMENT EVALUATION
LEMONT TOWNSHIP
COOK COUNTY, ILLINOIS



**FIGURE 4
4481.015**

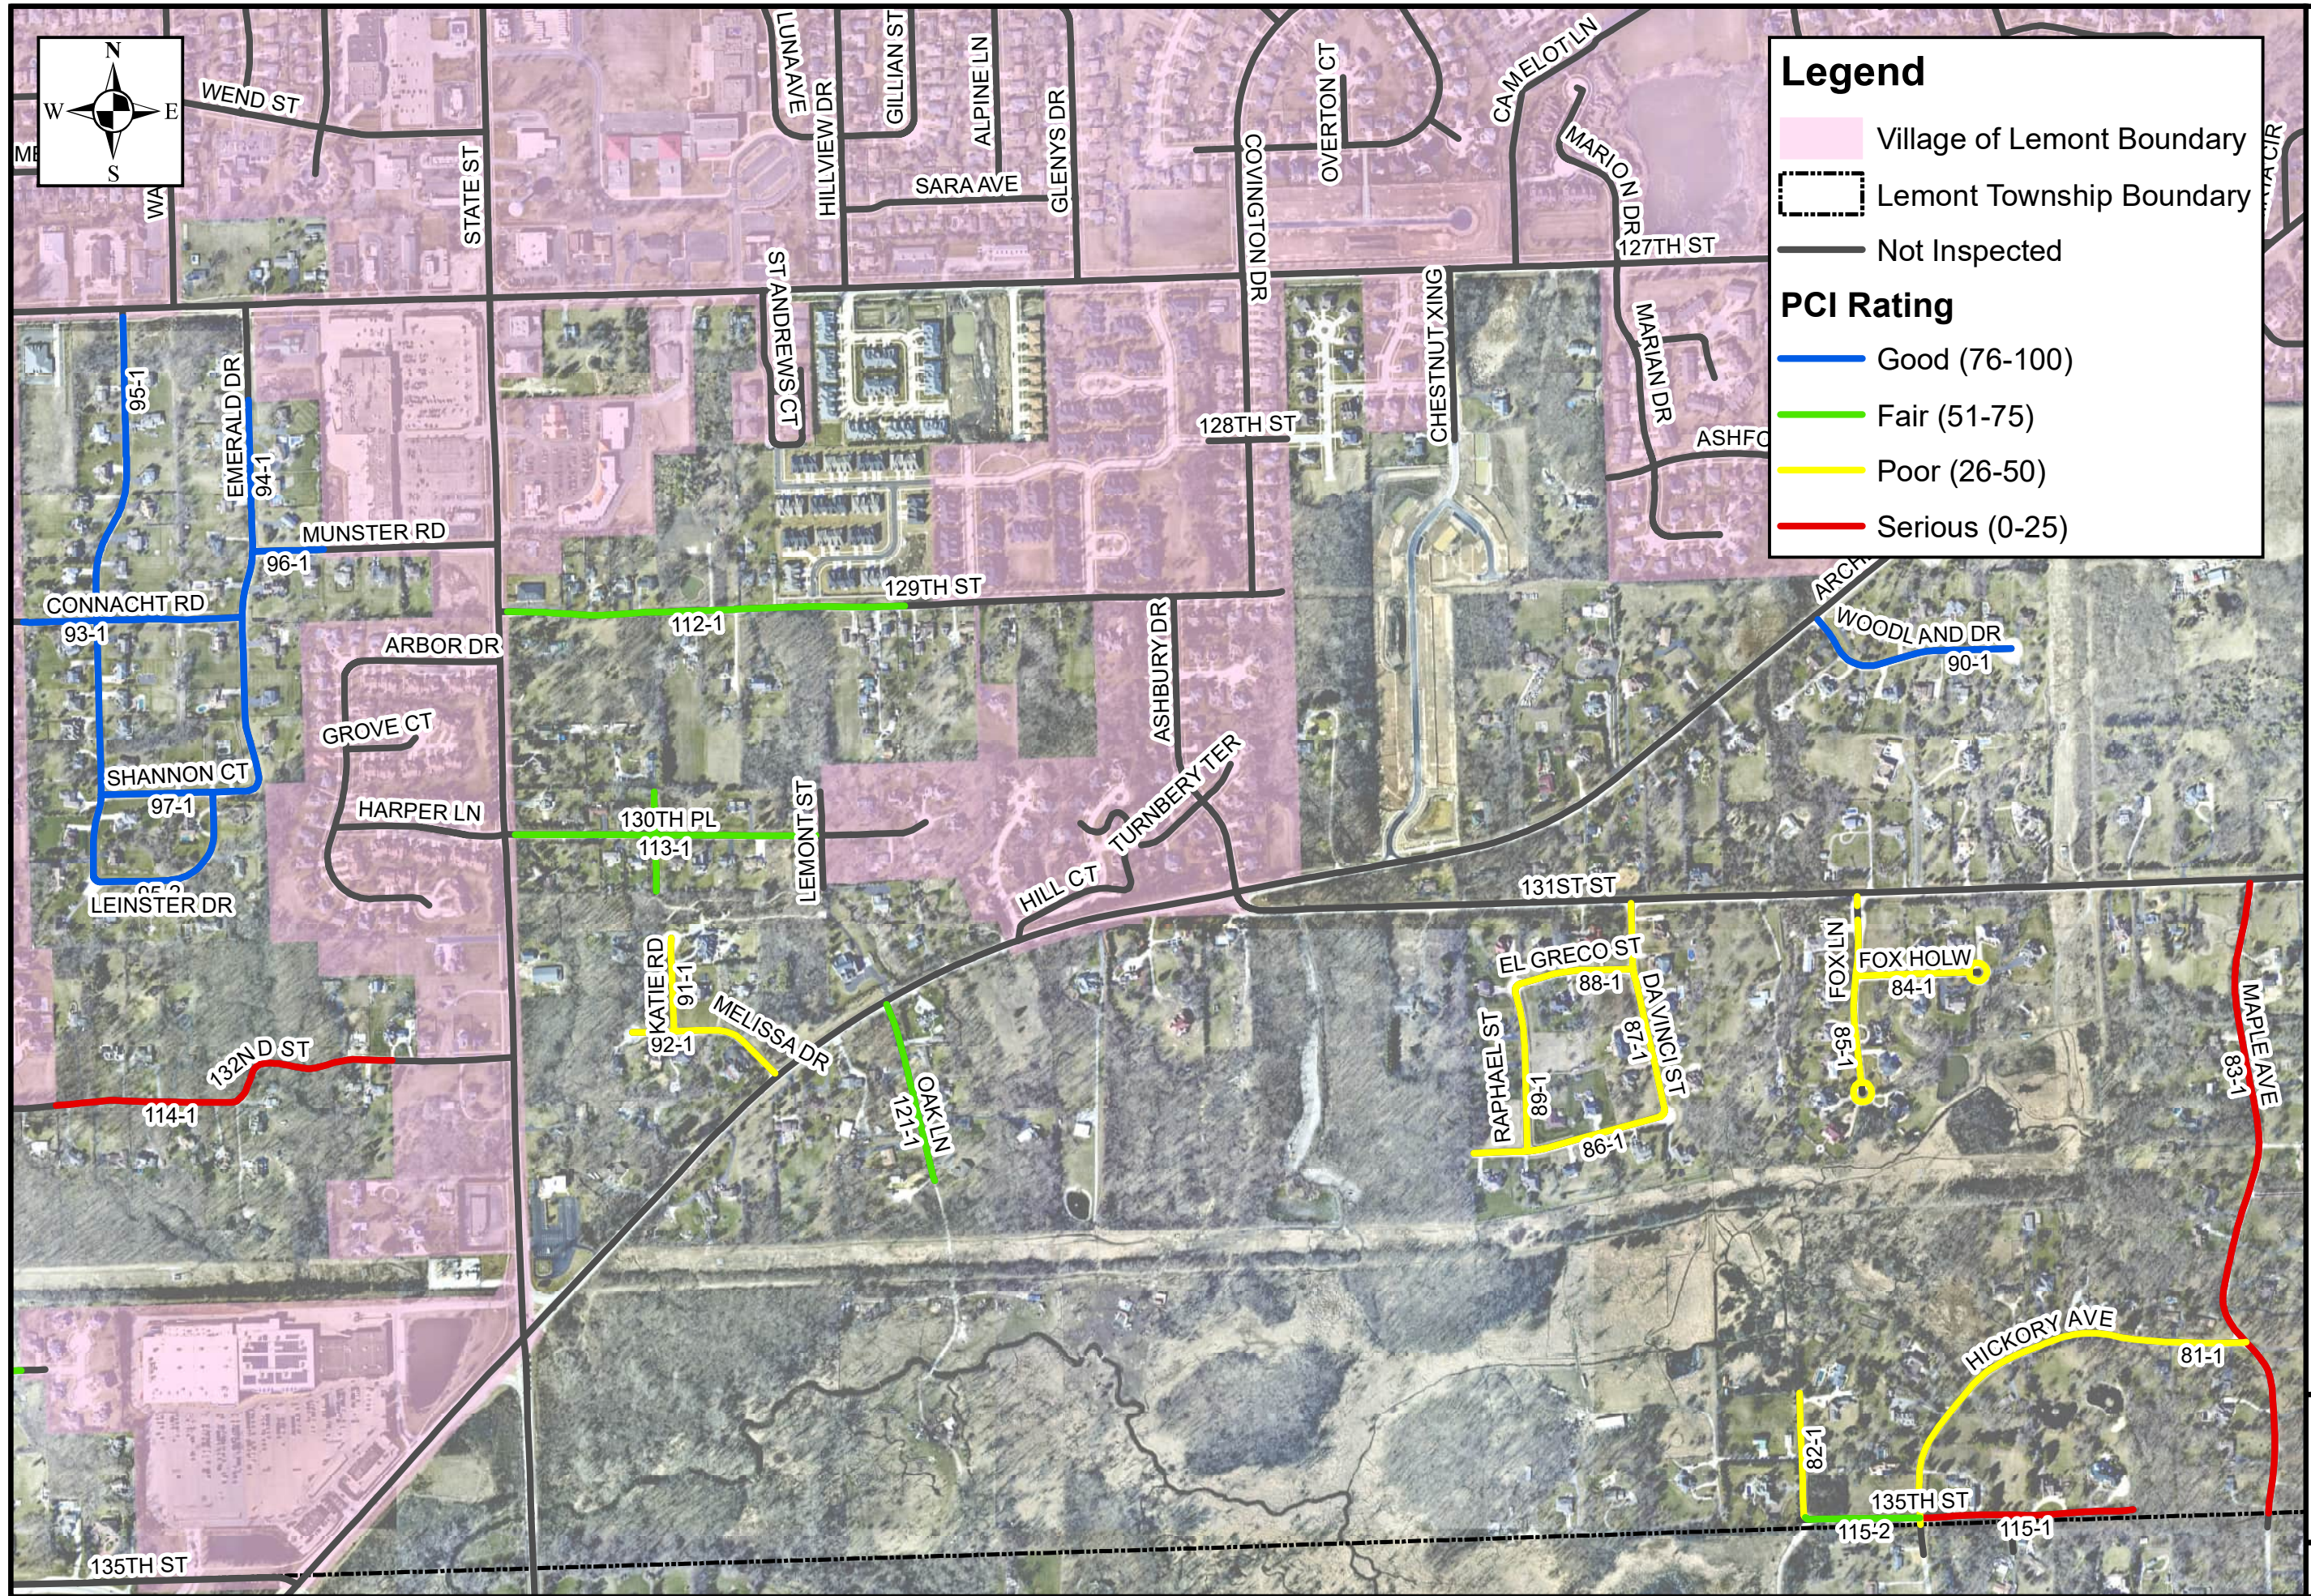

CREEKWOOD, EMERALD, FOXMOOR, RENAISSANCE VALLEY, WOLF CROSSING, WOODLAND SUBDIVISIONS, AND INDEPENDENT ROADS

2024 ROADWAY PAVEMENT EVALUATION
 LEMONT TOWNSHIP
 COOK COUNTY, ILLINOIS



FIGURE 5
 4481.015



BIG RUN ACRES AND CACHE LAKE SUBDIVISIONS

2024 ROADWAY PAVEMENT EVALUATION
 LEMONT TOWNSHIP
 COOK COUNTY, ILLINOIS



FIGURE 6
 4481.015

APPENDIX D

Table 1: Existing Distress Descriptions

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
01	117th St	1-1	EDGE CR	10.00	Ft	H	86.2
			EDGE CR	20.00	Ft	M	
			LANE SH DROP	25.00	Ft	M	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	15.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
02	118th St	2-1	EDGE CR	15.00	Ft	H	86.7
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			EDGE CR	5.00	Ft	H	
			EDGE CR	30.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	50.00	Ft	L	
			LANE SH DROP	60.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	10.00	Ft	H	
			ALLIGATOR CR	10.00	SqFt	L	
			LANE SH DROP	10.00	Ft	L	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
LANE SH DROP	25.00	Ft	H				
03	119th St	3-1	L & T CR	150.00	Ft	L	83.7
			EDGE CR	20.00	Ft	H	
			LANE SH DROP	35.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	25.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	5.00	Ft	M	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	5.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	60.00	Ft	M	
EDGE CR	20.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
03	119th St	3-1	EDGE CR	20.00	Ft	M	83.7
			SLIPPAGE CR	5.00	SqFt	L	
			LANE SH DROP	5.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	10.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
04	121st St	4-1	ALLIGATOR CR	50.00	SqFt	L	75.4
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	30.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	M	
			LANE SH DROP	100.00	Ft	M	
			EDGE CR	25.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	15.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			EDGE CR	50.00	Ft	H	
05	Center Dr	5-1	EDGE CR	10.00	Ft	M	86.3
			EDGE CR	20.00	Ft	H	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	20.00	Ft	L	
			EDGE CR	50.00	Ft	H	
			EDGE CR	10.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	25.00	Ft	H	
			EDGE CR	15.00	Ft	M	
			L & T CR	15.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	10.00	Ft	L	
			EDGE CR	10.00	Ft	L	
			EDGE CR	15.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	25.00	Ft	L	
			EDGE CR	10.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	10.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	L	
LANE SH DROP	10.00	Ft	M				
LANE SH DROP	20.00	Ft	H				
EDGE CR	30.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
05	Center Dr	5-1	LANE SH DROP	5.00	Ft	H	86.3
			LANE SH DROP	15.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	40.00	Ft	H	
06	Hillcrest Dr	6-1	EDGE CR	15.00	Ft	M	82.0
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	10.00	SqFt	L	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	20.00	Ft	L	
			DEPRESSION	15.00	SqFt	H	
			LANE SH DROP	10.00	Ft	M	
			EDGE CR	10.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	20.00	Ft	L	
			EDGE CR	10.00	Ft	L	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	10.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			EDGE CR	5.00	Ft	H	
			LANE SH DROP	15.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			ALLIGATOR CR	10.00	SqFt	L	
LANE SH DROP	30.00	Ft	M				
ALLIGATOR CR	40.00	SqFt	L				
LANE SH DROP	20.00	Ft	M				
LANE SH DROP	30.00	Ft	H				
07	Hillcrest Rd	7-1	RAVELING	100.00	SqFt	M	59.7
			ALLIGATOR CR	60.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	60.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			POTHOLE	2.00	Count	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			LANE SH DROP	60.00	Ft	L	
			RUTTING	20.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			LANE SH DROP	30.00	Ft	M	
			RAVELING	20.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			POTHOLE	4.00	Count	M	
			RAVELING	40.00	SqFt	M	
ALLIGATOR CR	20.00	SqFt	L				
RAVELING	100.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
07	Hillcrest Rd	7-1	ALLIGATOR CR	30.00	SqFt	M	59.7
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	15.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			WEATHERING	30,324.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			RUTTING	40.00	SqFt	L	
			RAVELING	40.00	SqFt	M	
			L & T CR	100.00	Ft	M	
			RAVELING	20.00	SqFt	M	
			RAVELING	40.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			RAVELING	40.00	SqFt	M	
			L & T CR	40.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	15.00	Ft	M	
08	Oak Ave	8-1	LANE SH DROP	30.00	Ft	M	89.8
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	60.00	Ft	L	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
LANE SH DROP	60.00	Ft	H				
09	Apple Ave	9-1	EDGE CR	10.00	Ft	H	61.8
			LANE SH DROP	15.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	45.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	30.00	Ft	L	
			RUTTING	100.00	SqFt	L	
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	50.00	Ft	H	
			L & T CR	30.00	Ft	M	
			DEPRESSION	15.00	SqFt	L	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	15.00	Ft	M	
			L & T CR	20.00	Ft	M	
EDGE CR	10.00	Ft	H				
ALLIGATOR CR	60.00	SqFt	L				
LANE SH DROP	30.00	Ft	M				
RUTTING	100.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
09	Apple Ave	9-1	LANE SH DROP	40.00	Ft	M	61.8
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			LANE SH DROP	100.00	Ft	H	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
10	Pine Ave	10-1	POTHOLE	1.00	Count	H	71.1
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
			L & T CR	15.00	Ft	M	
			ALLIGATOR CR	10.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			LANE SH DROP	10.00	Ft	M	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			L & T CR	40.00	Ft	L	
			L & T CR	30.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	750.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	60.00	Ft	M	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	50.00	Ft	M	
			EDGE CR	40.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
L & T CR	50.00	Ft	L				
LANE SH DROP	50.00	Ft	L				
LANE SH DROP	20.00	Ft	M				
L & T CR	15.00	Ft	L				
11	Prairie Ct	11-1	ALLIGATOR CR	50.00	SqFt	M	58.1
			EDGE CR	15.00	Ft	H	
			EDGE CR	15.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
ALLIGATOR CR	60.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
11	Prairie Ct	11-1	RUTTING	45.00	SqFt	L	58.1
			EDGE CR	10.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	25.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	M	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	600.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	10.00	Ft	H	
			L & T CR	30.00	Ft	L	
			DEPRESSION	60.00	SqFt	H	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	15.00	Ft	M	
			ALLIGATOR CR	70.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	35.00	Ft	H	
			L & T CR	50.00	Ft	L	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
LANE SH DROP	70.00	Ft	H				
DEPRESSION	30.00	SqFt	M				
LANE SH DROP	15.00	Ft	M				
WEATHERING	40.00	SqFt	L				
ALLIGATOR CR	40.00	SqFt	M				
12	Artesian St	12-1	ALLIGATOR CR	200.00	SqFt	M	33.2
			ALLIGATOR CR	1,000.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			POTHOLE	2.00	Count	L	
			ALLIGATOR CR	500.00	SqFt	M	
			LANE SH DROP	50.00	Ft	M	
			LANE SH DROP	50.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	H	
			PATCH/UT CUT	60.00	SqFt	H	
			EDGE CR	50.00	Ft	M	
13	Campbell St	13-1	BUMPS/SAGS	20.00	Ft	L	40.2
			L & T CR	100.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	H	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
13	Campbell St	13-1	L & T CR	30.00	Ft	M	40.2
			ALLIGATOR CR	200.00	SqFt	M	
			WEATHERING	200.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	M	
			POTHOLE	3.00	Count	L	
			L & T CR	80.00	Ft	L	
			ALLIGATOR CR	160.00	SqFt	M	
			BLOCK CR	100.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	20.00	Ft	L	
14	Liberty Dr	14-1	DEPRESSION	40.00	SqFt	L	60.1
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			PATCH/UT CUT	210.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	15.00	Ft	L	
			L & T CR	30.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	M	
			BLOCK CR	110.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	60.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	80.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			EDGE CR	100.00	Ft	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			DEPRESSION	60.00	SqFt	L	
			L & T CR	35.00	Ft	L	
			PATCH/UT CUT	90.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			DEPRESSION	60.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	22.00	Ft	L	
ALLIGATOR CR	100.00	SqFt	M				
L & T CR	22.00	Ft	L				
L & T CR	20.00	Ft	L				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
14	Liberty Dr	14-1	ALLIGATOR CR	60.00	SqFt	L	60.1
			ALLIGATOR CR	80.00	SqFt	L	
			DEPRESSION	60.00	SqFt	L	
			ALLIGATOR CR	64.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	60.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
15	Woodlawn Ave	15-1	L & T CR	15.00	Ft	H	41.0
			ALLIGATOR CR	200.00	SqFt	M	
			DEPRESSION	10.00	SqFt	M	
			BUMPS/SAGS	12.00	Ft	L	
			L & T CR	60.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			BLOCK CR	600.00	SqFt	M	
			BLOCK CR	600.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
ALLIGATOR CR	100.00	SqFt	H				
16	115th St	16-1	L & T CR	12.00	Ft	L	47.3
			EDGE CR	100.00	Ft	M	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	360.00	SqFt	M	
			PATCH/UT CUT	80.00	SqFt	H	
			RUTTING	200.00	SqFt	L	
			PATCH/UT CUT	40.00	SqFt	H	
			ALLIGATOR CR	30.00	SqFt	H	
			BUMPS/SAGS	46.00	Ft	L	
			EDGE CR	30.00	Ft	H	
			PATCH/UT CUT	20.00	SqFt	H	
			POTHOLE	1.00	Count	M	
			L & T CR	115.00	Ft	L	
			PATCH/UT CUT	20.00	SqFt	H	
			EDGE CR	100.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	1,800.00	Ft	L	
			BUMPS/SAGS	115.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			BUMPS/SAGS	23.00	Ft	M	
			L & T CR	46.00	Ft	L	
PATCH/UT CUT	30.00	SqFt	H				
PATCH/UT CUT	5.00	SqFt	H				
ALLIGATOR CR	150.00	SqFt	M				
ALLIGATOR CR	200.00	SqFt	M				
16	115th St	16-2	RUTTING	300.00	SqFt	L	36.4
			PATCH/UT CUT	25.00	SqFt	H	
			ALLIGATOR CR	45.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
16	115th St	16-2	WEATHERING	400.00	SqFt	M	36.4
			EDGE CR	30.00	Ft	M	
			RUTTING	200.00	SqFt	L	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	H	
			ALLIGATOR CR	300.00	SqFt	M	
			EDGE CR	50.00	Ft	M	
			EDGE CR	50.00	Ft	L	
			WEATHERING	160.00	SqFt	H	
			ALLIGATOR CR	270.00	SqFt	M	
			L & T CR	60.00	Ft	M	
			PATCH/UT CUT	40.00	SqFt	H	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	160.00	SqFt	M	
			LANE SH DROP	80.00	Ft	L	
			RUTTING	60.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	240.00	SqFt	M	
			WEATHERING	900.00	SqFt	H	
			L & T CR	150.00	Ft	L	
			WEATHERING	160.00	SqFt	M	
			ALLIGATOR CR	900.00	SqFt	H	
			BUMPS/SAGS	15.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	80.00	Ft	M	
			POTHOLE	1.00	Count	H	
			EDGE CR	50.00	Ft	L	
			PATCH/UT CUT	20.00	SqFt	H	
			ALLIGATOR CR	400.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			L & T CR	50.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	L	
DEPRESSION	60.00	SqFt	M				
EDGE CR	30.00	Ft	M				
POTHOLE	2.00	Count	M				
ALLIGATOR CR	45.00	SqFt	M				
17	Clearview	17-1	EDGE CR	10.00	Ft	H	33.4
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	6.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			POTHOLE	2.00	Count	H	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	330.00	SqFt	M	
			ALLIGATOR CR	450.00	SqFt	M	
			POTHOLE	1.00	Count	H	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	75.00	SqFt	M	
			RUTTING	80.00	SqFt	L	
			DEPRESSION	33.00	SqFt	L	
			RUTTING	30.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
17	Clearview	17-1	ALLIGATOR CR	550.00	SqFt	M	33.4
			WEATHERING	20.00	SqFt	L	
			L & T CR	90.00	Ft	L	
			ALLIGATOR CR	66.00	SqFt	M	
			ALLIGATOR CR	165.00	SqFt	M	
			WEATHERING	20.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	550.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	450.00	SqFt	M	
18	Dineff Rd	18-1	ALLIGATOR CR	40.00	SqFt	L	71.6
			EDGE CR	80.00	Ft	L	
			EDGE CR	80.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	L	
			EDGE CR	60.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	M	
			LANE SH DROP	45.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			EDGE CR	25.00	Ft	H	
			EDGE CR	30.00	Ft	M	
			L & T CR	10.00	Ft	L	
			L & T CR	10.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	M	
			L & T CR	18.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			EDGE CR	20.00	Ft	M	
			EDGE CR	15.00	Ft	L	
			L & T CR	100.00	Ft	L	
			EDGE CR	60.00	Ft	M	
			SLIPPAGE CR	20.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			L & T CR	30.00	Ft	L	
			EDGE CR	50.00	Ft	L	
			EDGE CR	60.00	Ft	L	
			L & T CR	510.00	Ft	L	
			EDGE CR	40.00	Ft	H	
			LANE SH DROP	8.00	Ft	H	
			EDGE CR	10.00	Ft	L	
LANE SH DROP	25.00	Ft	H				
LANE SH DROP	70.00	Ft	H				
EDGE CR	60.00	Ft	L				
ALLIGATOR CR	75.00	SqFt	L				
ALLIGATOR CR	60.00	SqFt	L				
LANE SH DROP	40.00	Ft	M				
ALLIGATOR CR	60.00	SqFt	M				
RUTTING	60.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
18	Dineff Rd	18-1	LANE SH DROP	100.00	Ft	H	71.6
			LANE SH DROP	60.00	Ft	H	
			L & T CR	6.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	150.00	Ft	M	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	24.00	Ft	L	
19	North Trl	19-1	ALLIGATOR CR	30.00	SqFt	M	26.2
			ALLIGATOR CR	138.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	30.00	Ft	L	
			ALLIGATOR CR	66.00	SqFt	M	
			ALLIGATOR CR	66.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			WEATHERING	120.00	SqFt	L	
			ALLIGATOR CR	55.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	H	
			RUTTING	150.00	SqFt	M	
			L & T CR	30.00	Ft	L	
			WEATHERING	60.00	SqFt	L	
			ALLIGATOR CR	180.00	SqFt	H	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	138.00	SqFt	H	
			POTHOLE	3.00	Count	M	
			RUTTING	60.00	SqFt	M	
			ALLIGATOR CR	550.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
ALLIGATOR CR	120.00	SqFt	M				
ALLIGATOR CR	200.00	SqFt	H				
ALLIGATOR CR	100.00	SqFt	M				
20	Rusty Rd	20-1	ALLIGATOR CR	250.00	SqFt	M	46.4
			EDGE CR	70.00	Ft	H	
			ALLIGATOR CR	250.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			L & T CR	46.00	Ft	L	
			BUMPS/SAGS	46.00	Ft	M	
			ALLIGATOR CR	700.00	SqFt	M	
			RUTTING	90.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			L & T CR	46.00	Ft	M	
			BUMPS/SAGS	23.00	Ft	L	
			ALLIGATOR CR	180.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			BUMPS/SAGS	152.00	Ft	M	
			L & T CR	23.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	L	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	400.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	15.00	Ft	H	
ALLIGATOR CR	300.00	SqFt	M				
BUMPS/SAGS	46.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
20	Rusty Rd	20-1	BUMPS/SAGS	46.00	Ft	M	46.4
			PATCH/UT CUT	15.00	SqFt	H	
			L & T CR	46.00	Ft	L	
			L & T CR	150.00	Ft	M	
			PATCH/UT CUT	20.00	SqFt	H	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			BUMPS/SAGS	46.00	Ft	M	
			PATCH/UT CUT	80.00	SqFt	H	
			PATCH/UT CUT	100.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			BUMPS/SAGS	46.00	Ft	M	
			PATCH/UT CUT	200.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	L	
			L & T CR	46.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			BUMPS/SAGS	46.00	Ft	M	
			EDGE CR	70.00	Ft	M	
			BUMPS/SAGS	46.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			RUTTING	40.00	SqFt	L	
			L & T CR	46.00	Ft	M	
			ALLIGATOR CR	250.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
L & T CR	152.00	Ft	L				
ALLIGATOR CR	150.00	SqFt	M				
L & T CR	46.00	Ft	L				
L & T CR	46.00	Ft	L				
21	Silver Spur Rd	21-1	ALLIGATOR CR	660.00	SqFt	M	38.3
			LANE SH DROP	45.00	Ft	H	
			L & T CR	22.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	66.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			LANE SH DROP	100.00	Ft	M	
			L & T CR	120.00	Ft	L	
			ALLIGATOR CR	500.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			EDGE CR	50.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	90.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	H	
			EDGE CR	100.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
EDGE CR	30.00	Ft	H				
22	Stone Creek Dr	22-1	DEPRESSION	80.00	SqFt	L	47.2
			BLOCK CR	220.00	SqFt	M	
			EDGE CR	70.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	60.00	Ft	H	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
22	Stone Creek Dr	22-1	L & T CR	2,267.00	Ft	L	47.2
			LANE SH DROP	60.00	Ft	H	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	M	
			DEPRESSION	45.00	SqFt	L	
			SLIPPAGE CR	66.00	SqFt	M	
			L & T CR	30.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	800.00	SqFt	L	
			EDGE CR	100.00	Ft	M	
			ALLIGATOR CR	700.00	SqFt	M	
			RUTTING	200.00	SqFt	L	
			PATCH/UT CUT	110.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	66.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	L	
			LANE SH DROP	50.00	Ft	H	
			RUTTING	80.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
EDGE CR	30.00	Ft	M				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	700.00	SqFt	M				
ALLIGATOR CR	60.00	SqFt	M				
23	Timberview	23-1	DEPRESSION	15.00	SqFt	L	24.0
			DEPRESSION	75.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			DEPRESSION	25.00	SqFt	L	
			ALLIGATOR CR	627.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			RAVELING	40.00	SqFt	M	
			ALLIGATOR CR	25.00	SqFt	M	
			DEPRESSION	120.00	SqFt	L	
			ALLIGATOR CR	180.00	SqFt	M	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	H	
			ALLIGATOR CR	15.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			L & T CR	22.00	Ft	L	
			POTHOLE	2.00	Count	L	
			ALLIGATOR CR	250.00	SqFt	L	
			ALLIGATOR CR	540.00	SqFt	M	
			ALLIGATOR CR	110.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	242.00	SqFt	H	
L & T CR	22.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
23	Timberview	23-1	DEPRESSION	270.00	SqFt	L	24.0
			BLOCK CR	60.00	SqFt	L	
			PATCH/UT CUT	162.00	SqFt	L	
			DEPRESSION	15.00	SqFt	L	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
24	Brookside Dr	24-1	L & T CR	90.00	Ft	L	49.3
			RUTTING	120.00	SqFt	L	
			PATCH/UT CUT	500.00	SqFt	L	
			RUTTING	160.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			DEPRESSION	30.00	SqFt	H	
			ALLIGATOR CR	200.00	SqFt	M	
			RUTTING	200.00	SqFt	L	
			DEPRESSION	30.00	SqFt	H	
			ALLIGATOR CR	200.00	SqFt	M	
			WEATHERING	120.00	SqFt	L	
			L & T CR	300.00	Ft	L	
			RUTTING	120.00	SqFt	L	
			WEATHERING	100.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			WEATHERING	10.00	SqFt	H	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	160.00	SqFt	M	
			WEATHERING	30.00	SqFt	H	
			ALLIGATOR CR	225.00	SqFt	M	
			ALLIGATOR CR	180.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	100.00	Ft	L	
			ALLIGATOR CR	500.00	SqFt	M	
			DEPRESSION	150.00	SqFt	L	
			L & T CR	20.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	L	
EDGE CR	20.00	Ft	H				
L & T CR	22.00	Ft	L				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	240.00	SqFt	M				
ALLIGATOR CR	100.00	SqFt	M				
25	Martin Ct	25-1	L & T CR	15.00	Ft	L	72.0
			EDGE CR	15.00	Ft	L	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	M	
			EDGE CR	15.00	Ft	L	
			L & T CR	15.00	Ft	L	
26	Waitkus Dr	26-1	L & T CR	22.00	Ft	L	51.8
			ALLIGATOR CR	90.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	330.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			LANE SH DROP	70.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
26	Waitkus Dr	26-1	BUMPS/SAGS	22.00	Ft	M	51.8
			L & T CR	100.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	100.00	SqFt	L	
			LANE SH DROP	30.00	Ft	H	
			BLOCK CR	440.00	SqFt	L	
27	Woodview Ln	27-1	ALLIGATOR CR	250.00	SqFt	M	45.9
			DEPRESSION	75.00	SqFt	M	
			L & T CR	150.00	Ft	L	
			ALLIGATOR CR	65.00	SqFt	M	
			PATCH/UT CUT	69.00	SqFt	L	
			RUTTING	75.00	SqFt	L	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	600.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	
			L & T CR	60.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	400.00	SqFt	M	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	400.00	SqFt	M	
			L & T CR	250.00	Ft	L	
			L & T CR	100.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			PATCH/UT CUT	360.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	200.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	M	
			ALLIGATOR CR	400.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			RUTTING	200.00	SqFt	M	
			POTHOLE	1.00	Count	M	
			DEPRESSION	60.00	SqFt	M	
			PATCH/UT CUT	46.00	SqFt	L	
			BUMPS/SAGS	23.00	Ft	L	
ALLIGATOR CR	300.00	SqFt	M				
ALLIGATOR CR	150.00	SqFt	M				
ALLIGATOR CR	120.00	SqFt	M				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	500.00	SqFt	M				
ALLIGATOR CR	100.00	SqFt	M				
28	Bell Oak Ln	28-1	ALLIGATOR CR	180.00	SqFt	M	23.2
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
28	Bell Oak Ln	28-1	L & T CR	22.00	Ft	L	23.2
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			POTHOLE	1.00	Count	M	
			POTHOLE	1.00	Count	M	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	160.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	H	
			L & T CR	100.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	11.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			POTHOLE	2.00	Count	L	
			BUMPS/SAGS	22.00	Ft	M	
			RUTTING	80.00	SqFt	L	
POTHOLE	1.00	Count	L				
POTHOLE	160.00	Count	L				
BUMPS/SAGS	22.00	Ft	L				
BUMPS/SAGS	22.00	Ft	L				
L & T CR	22.00	Ft	L				
RUTTING	20.00	SqFt	L				
EDGE CR	10.00	Ft	H				
29	Buckskin	29-1	L & T CR	40.00	Ft	M	37.7
			ALLIGATOR CR	80.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			RUTTING	80.00	SqFt	M	
			DEPRESSION	100.00	SqFt	L	
			ALLIGATOR CR	320.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			L & T CR	22.00	Ft	M	
			BLOCK CR	100.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
WEATHERING	200.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
29	Buckskin	29-1	ALLIGATOR CR	150.00	SqFt	M	37.7
			ALLIGATOR CR	300.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	10.00	SqFt	H	
			LANE SH DROP	10.00	Ft	M	
			PATCH/UT CUT	120.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	M	
30	Carriage Ln	30-1	EDGE CR	10.00	Ft	L	94.3
			EDGE CR	100.00	Ft	L	
			L & T CR	15.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	30.00	Ft	L	
			EDGE CR	100.00	Ft	L	
			EDGE CR	100.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	20.00	Ft	L	
31	Chestnut	31-1	ALLIGATOR CR	30.00	SqFt	L	81.9
			LANE SH DROP	20.00	Ft	M	
			L & T CR	15.00	Ft	L	
			L & T CR	25.00	Ft	L	
			L & T CR	30.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	15.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	15.00	SqFt	L	
			L & T CR	17.00	Ft	L	
			EDGE CR	25.00	Ft	M	
			EDGE CR	50.00	Ft	L	
			EDGE CR	10.00	Ft	L	
32	Equestrian Way	32-1	EDGE CR	20.00	Ft	L	87.0
			EDGE CR	35.00	Ft	L	
			L & T CR	30.00	Ft	L	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			EDGE CR	20.00	Ft	L	
			EDGE CR	80.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			ALLIGATOR CR	15.00	SqFt	L	
			L & T CR	40.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	30.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
L & T CR	60.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
32	Equestrian Way	32-1	ALLIGATOR CR	40.00	SqFt	L	87.0
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	40.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	30.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			PATCH/UT CUT	30.00	SqFt	L	
			EDGE CR	50.00	Ft	M	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	100.00	Ft	L	
			L & T CR	30.00	Ft	L	
			L & T CR	100.00	Ft	L	
			L & T CR	20.00	Ft	L	
33	Golden Spur	33-1	LANE SH DROP	15.00	Ft	H	45.2
			EDGE CR	8.00	Ft	H	
			RUTTING	250.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			WEATHERING	45.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			RUTTING	60.00	SqFt	M	
			DEPRESSION	120.00	SqFt	L	
			DEPRESSION	45.00	SqFt	L	
			RUTTING	80.00	SqFt	L	
			EDGE CR	10.00	Ft	H	
			EDGE CR	30.00	Ft	M	
			L & T CR	23.00	Ft	L	
			DEPRESSION	100.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
L & T CR	23.00	Ft	L				
WEATHERING	50.00	SqFt	M				
ALLIGATOR CR	250.00	SqFt	L				
ALLIGATOR CR	120.00	SqFt	L				
ALLIGATOR CR	100.00	SqFt	L				
ALLIGATOR CR	75.00	SqFt	L				
34	Horseshoe Ln	34-1	ALLIGATOR CR	200.00	SqFt	M	42.2
			ALLIGATOR CR	60.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	250.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			EDGE CR	50.00	Ft	M	
			DEPRESSION	40.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	L	
			PATCH/UT CUT	420.00	SqFt	L	
ALLIGATOR CR	100.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-1	ALLIGATOR CR	40.00	SqFt	M	42.2
			L & T CR	500.00	Ft	L	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	180.00	SqFt	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	L	
			RAVELING	100.00	SqFt	H	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			RUTTING	160.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	21.00	Ft	L	
			BLOCK CR	100.00	SqFt	L	
			LANE SH DROP	30.00	Ft	H	
			BLOCK CR	400.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	60.00	Ft	H	
			DEPRESSION	50.00	SqFt	L	
			PATCH/UT CUT	110.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			L & T CR	21.00	Ft	M	
			RUTTING	160.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	100.00	Ft	H	
			DEPRESSION	80.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	60.00	Ft	M	
			ALLIGATOR CR	800.00	SqFt	M	
			L & T CR	10.50	Ft	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	21.00	Ft	L	
LANE SH DROP	60.00	Ft	M				
ALLIGATOR CR	120.00	SqFt	L				
LANE SH DROP	60.00	Ft	H				
L & T CR	100.00	Ft	M				
RUTTING	120.00	SqFt	M				
EDGE CR	60.00	Ft	H				
L & T CR	21.00	Ft	L				
L & T CR	21.00	Ft	M				
POTHOLE	1.00	Count	M				
BUMPS/SAGS	10.50	Ft	L				
BUMPS/SAGS	21.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-1	BLOCK CR	21.00	SqFt	L	42.2
			ALLIGATOR CR	160.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			BLOCK CR	200.00	SqFt	L	
			ALLIGATOR CR	600.00	SqFt	L	
			L & T CR	21.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	21.00	Ft	M	
			RUTTING	60.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	30.00	Ft	H	
			ALLIGATOR CR	90.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
			EDGE CR	45.00	Ft	M	
			BUMPS/SAGS	21.00	Ft	M	
			BUMPS/SAGS	21.00	Ft	L	
			EDGE CR	40.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	M	
			L & T CR	21.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	170.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			BUMPS/SAGS	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			RUTTING	200.00	SqFt	L	
			L & T CR	21.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			PATCH/UT CUT	280.00	SqFt	L	
			LANE SH DROP	10.00	Ft	H	
			EDGE CR	100.00	Ft	H	
RUTTING	120.00	SqFt	L				
EDGE CR	20.00	Ft	H				
DEPRESSION	25.00	SqFt	L				
EDGE CR	10.00	Ft	H				
RUTTING	80.00	SqFt	L				
L & T CR	21.00	Ft	L				
EDGE CR	50.00	Ft	H				
LANE SH DROP	100.00	Ft	M				
ALLIGATOR CR	120.00	SqFt	M				
L & T CR	21.00	Ft	L				
RUTTING	120.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-1	PATCH/UT CUT	80.00	SqFt	H	42.2
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	21.00	Ft	M	
			ALLIGATOR CR	500.00	SqFt	M	
			EDGE CR	100.00	Ft	M	
			L & T CR	21.00	Ft	L	
			EDGE CR	60.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			L & T CR	21.00	Ft	L	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	21.00	Ft	M	
			L & T CR	21.00	Ft	M	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	80.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	30.00	Ft	M	
			BUMPS/SAGS	21.00	Ft	L	
			PATCH/UT CUT	300.00	SqFt	L	
			POTHOLE	1.00	Count	H	
			RUTTING	240.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			PATCH/UT CUT	5.00	SqFt	H	
			RUTTING	100.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	60.00	SqFt	M	
			POTHOLE	1.00	Count	M	
			L & T CR	21.00	Ft	L	
BUMPS/SAGS	21.00	Ft	M				
L & T CR	300.00	Ft	M				
LANE SH DROP	20.00	Ft	H				
EDGE CR	100.00	Ft	H				
L & T CR	21.00	Ft	L				
EDGE CR	15.00	Ft	H				
ALLIGATOR CR	80.00	SqFt	M				
EDGE CR	30.00	Ft	M				
LANE SH DROP	100.00	Ft	H				
EDGE CR	40.00	Ft	H				
RAVELING	80.00	SqFt	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-1	POTHOLE	1.00	Count	L	42.2
			RUTTING	90.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
34	Horseshoe Ln	34-2	L & T CR	22.00	Ft	L	48.3
			L & T CR	40.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			EDGE CR	30.00	Ft	H	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	330.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	20.00	Ft	L	
			POTHOLE	1.00	Count	L	
			BUMPS/SAGS	11.00	Ft	L	
			EDGE CR	15.00	Ft	H	
			BUMPS/SAGS	22.00	Ft	M	
			EDGE CR	80.00	Ft	H	
			BUMPS/SAGS	22.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			BLOCK CR	22.00	SqFt	L	
			L & T CR	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			DEPRESSION	60.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			L & T CR	22.00	Ft	L	
			L & T CR	11.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	30.00	Ft	M	
			POTHOLE	1.00	Count	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			DEPRESSION	30.00	SqFt	H	
			L & T CR	22.00	Ft	L	
BUMPS/SAGS	22.00	Ft	L				
BUMPS/SAGS	22.00	Ft	L				
LANE SH DROP	60.00	Ft	H				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-2	PATCH/UT CUT	5.00	SqFt	L	48.3
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	35.00	Ft	L	
			L & T CR	200.00	Ft	M	
			LANE SH DROP	80.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	M	
			RUTTING	150.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	80.00	Ft	M	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	15.00	Ft	H	
			POTHOLE	1.00	Count	M	
			L & T CR	300.00	Ft	M	
			EDGE CR	16.00	Ft	M	
			RUTTING	120.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			PATCH/UT CUT	165.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	15.00	Ft	M	
			L & T CR	22.00	Ft	M	
			PATCH/UT CUT	275.00	SqFt	L	
			L & T CR	80.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			L & T CR	30.00	Ft	M	
			L & T CR	22.00	Ft	L	
			L & T CR	150.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			L & T CR	700.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
ALLIGATOR CR	80.00	SqFt	M				
LANE SH DROP	50.00	Ft	M				
BUMPS/SAGS	22.00	Ft	M				
L & T CR	50.00	Ft	L				
L & T CR	22.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-2	EDGE CR	20.00	Ft	H	48.3
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	110.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			L & T CR	22.00	Ft	L	
			EDGE CR	15.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	L	
			POTHOLE	1.00	Count	M	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	L	
			DEPRESSION	25.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	1,400.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			LANE SH DROP	80.00	Ft	M	
			EDGE CR	75.00	Ft	H	
			EDGE CR	80.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			EDGE CR	30.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			POTHOLE	1.00	Count	L	
			DEPRESSION	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
EDGE CR	50.00	Ft	M				
BUMPS/SAGS	22.00	Ft	M				
LANE SH DROP	20.00	Ft	H				
L & T CR	22.00	Ft	L				
PATCH/UT CUT	5.00	SqFt	H				
PATCH/UT CUT	500.00	SqFt	L				
EDGE CR	80.00	Ft	H				
PATCH/UT CUT	98.00	SqFt	L				
PATCH/UT CUT	10.00	SqFt	H				
BUMPS/SAGS	22.00	Ft	L				
ALLIGATOR CR	120.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
34	Horseshoe Ln	34-2	L & T CR	22.00	Ft	L	48.3
			EDGE CR	60.00	Ft	H	
			BUMPS/SAGS	22.00	Ft	L	
35	Huntsman Ln	35-1	PATCH/UT CUT	40.00	SqFt	H	31.3
			RUTTING	75.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	H	
			ALLIGATOR CR	100.00	SqFt	H	
			WEATHERING	90.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	22.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			PATCH/UT CUT	100.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	M	
			EDGE CR	20.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			L & T CR	150.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
ALLIGATOR CR	30.00	SqFt	M				
DEPRESSION	20.00	SqFt	H				
ALLIGATOR CR	60.00	SqFt	M				
36	Lariat	36-1	LANE SH DROP	10.00	Ft	H	45.2
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	30.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	100.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	60.00	Ft	L	
			ALLIGATOR CR	45.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
			BLOCK CR	180.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	21.00	Ft	L	
			WEATHERING	60.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	10.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			L & T CR	10.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
ALLIGATOR CR	30.00	SqFt	M				
LANE SH DROP	10.00	Ft	H				
LANE SH DROP	15.00	Ft	M				
WEATHERING	200.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
37	Paddock	37-1	ALLIGATOR CR	200.00	SqFt	M	43.4
			ALLIGATOR CR	100.00	SqFt	M	
			POTHOLE	1.00	Count	H	
			DEPRESSION	45.00	SqFt	L	
			L & T CR	30.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			RUTTING	30.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			WEATHERING	100.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	5.00	Ft	H	
			DEPRESSION	50.00	SqFt	L	
			DEPRESSION	15.00	SqFt	L	
			ALLIGATOR CR	70.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	20.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			DEPRESSION	80.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			WEATHERING	80.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			DEPRESSION	10.00	SqFt	L	
			RUTTING	100.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	140.00	SqFt	L	
ALLIGATOR CR	100.00	SqFt	M				
L & T CR	15.00	Ft	L				
BLOCK CR	60.00	SqFt	L				
ALLIGATOR CR	80.00	SqFt	L				
38	Paso Fino	38-1	ALLIGATOR CR	300.00	SqFt	L	45.9
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	50.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	L	
			RUTTING	80.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	600.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
RUTTING	125.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
38	Paso Fino	38-1	LANE SH DROP	120.00	Ft	H	45.9
			PATCH/UT CUT	90.00	SqFt	L	
			BLOCK CR	120.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	500.00	SqFt	L	
39	Riva Ridge	39-1	ALLIGATOR CR	150.00	SqFt	M	43.6
			L & T CR	12.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	30.00	SqFt	L	
			PATCH/UT CUT	50.00	SqFt	H	
			LANE SH DROP	20.00	Ft	H	
			L & T CR	10.00	Ft	M	
			JT REF. CR	50.00	Ft	H	
			BLOCK CR	30.00	SqFt	M	
			EDGE CR	30.00	Ft	H	
			EDGE CR	20.00	Ft	M	
			L & T CR	200.00	Ft	L	
			POTHOLE	1.00	Count	M	
			WEATHERING	150.00	SqFt	L	
			EDGE CR	20.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			RUTTING	250.00	SqFt	M	
			RUTTING	350.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			POTHOLE	3.00	Count	L	
			ALLIGATOR CR	50.00	SqFt	M	
			RAVELING	50.00	SqFt	H	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	25.00	Ft	M	
			RUTTING	80.00	SqFt	M	
			L & T CR	1,600.00	Ft	L	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	20.00	SqFt	M	
			PATCH/UT CUT	95.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	H	
			L & T CR	50.00	Ft	H	
ALLIGATOR CR	200.00	SqFt	M				
DEPRESSION	100.00	SqFt	L				
ALLIGATOR CR	80.00	SqFt	L				
DEPRESSION	30.00	SqFt	L				
ALLIGATOR CR	80.00	SqFt	L				
RUTTING	150.00	SqFt	M				
LANE SH DROP	30.00	Ft	H				
EDGE CR	20.00	Ft	L				
40	Sorrel	40-1	L & T CR	10.00	Ft	L	49.5
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
40	Sorrel	40-1	L & T CR	21.00	Ft	L	49.5
			BLOCK CR	300.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			L & T CR	21.00	Ft	L	
			L & T CR	150.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	60.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			ALLIGATOR CR	30.00	SqFt	L	
			RUTTING	25.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			WEATHERING	120.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			WEATHERING	120.00	SqFt	L	
			DEPRESSION	50.00	SqFt	H	
			L & T CR	10.00	Ft	L	
			ALLIGATOR CR	90.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			EDGE CR	15.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	25.00	Ft	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	10.00	Ft	L	
			DEPRESSION	30.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	10.00	Ft	L	
L & T CR	21.00	Ft	L				
LANE SH DROP	70.00	Ft	M				
L & T CR	21.00	Ft	L				
DEPRESSION	20.00	SqFt	L				
L & T CR	21.00	Ft	L				
L & T CR	21.00	Ft	L				
L & T CR	21.00	Ft	L				
POTHOLE	1.00	Count	L				
L & T CR	40.00	Ft	L				
41	Split Rail	41-1	L & T CR	22.00	Ft	L	38.3
			DEPRESSION	140.00	SqFt	L	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			RUTTING	50.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	10.00	Ft	H	
			DEPRESSION	30.00	SqFt	L	
ALLIGATOR CR	90.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
41	Split Rail	41-1	WEATHERING	60.00	SqFt	L	38.3
			EDGE CR	25.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	11.00	Ft	L	
			DEPRESSION	30.00	SqFt	L	
			EDGE CR	10.00	Ft	H	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	450.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			RUTTING	60.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			L & T CR	50.00	Ft	M	
			L & T CR	26.00	Ft	L	
			DEPRESSION	30.00	SqFt	L	
			DEPRESSION	30.00	SqFt	L	
			L & T CR	11.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			POTHOLE	1.00	Count	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	M	
			RAVELING	140.00	SqFt	M	
L & T CR	20.00	Ft	H				
PATCH/UT CUT	90.00	SqFt	L				
WEATHERING	80.00	SqFt	L				
L & T CR	35.00	Ft	M				
42	Stone Creek Dr	42-1	ALLIGATOR CR	200.00	SqFt	M	52.1
			EDGE CR	70.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			BUMPS/SAGS	11.00	Ft	L	
			PATCH/UT CUT	115.00	SqFt	L	
			PATCH/UT CUT	250.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	240.00	SqFt	L	
			DEPRESSION	30.00	SqFt	M	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	66.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	60.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			RUTTING	75.00	SqFt	L	
			EDGE CR	100.00	Ft	M	
ALLIGATOR CR	66.00	SqFt	M				
ALLIGATOR CR	66.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
43	Surrey Rd	43-1	L & T CR	30.00	Ft	L	88.2
			L & T CR	10.00	Ft	L	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			L & T CR	150.00	Ft	L	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	5.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
44	Galway Ct	44-1	ALLIGATOR CR	50.00	SqFt	M	15.4
			L & T CR	18.00	Ft	L	
			EDGE CR	20.00	Ft	M	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	240.00	SqFt	M	
			ALLIGATOR CR	85.00	SqFt	M	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			RAVELING	120.00	SqFt	H	
			DEPRESSION	40.00	SqFt	L	
			ALLIGATOR CR	85.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			DEPRESSION	576.00	SqFt	H	
PATCH/UT CUT	4,000.00	SqFt	M				
45	Galway Rd	45-1	ALLIGATOR CR	200.00	SqFt	M	49.7
			L & T CR	24.00	Ft	L	
			LANE SH DROP	70.00	Ft	M	
			RUTTING	40.00	SqFt	L	
			BUMPS/SAGS	24.00	Ft	M	
			DEPRESSION	5.00	SqFt	L	
			BUMPS/SAGS	24.00	Ft	M	
			L & T CR	70.00	Ft	H	
			POTHOLE	1.00	Count	L	
			L & T CR	24.00	Ft	L	
			L & T CR	12.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	M	
			PATCH/UT CUT	240.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	M	
			BUMPS/SAGS	24.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			RUTTING	175.00	SqFt	L	
			EDGE CR	70.00	Ft	H	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	24.00	Ft	L	
ALLIGATOR CR	30.00	SqFt	M				
ALLIGATOR CR	50.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
45	Galway Rd	45-1	BUMPS/SAGS	24.00	Ft	M	49.7
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	M	
			ALLIGATOR CR	350.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			BLOCK CR	72.00	SqFt	M	
			L & T CR	12.00	Ft	M	
46	Galway Ln	46-1	L & T CR	22.00	Ft	L	68.5
			BUMPS/SAGS	22.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			DEPRESSION	100.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	50.00	Ft	H	
			EDGE CR	40.00	Ft	H	
			L & T CR	22.00	Ft	L	
			EDGE CR	40.00	Ft	H	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	15.00	Ft	H	
			L & T CR	35.00	Ft	L	
			L & T CR	22.00	Ft	M	
47	Saddlebrook Ln	47-1	POTHOLE	1.00	Count	M	34.7
			DEPRESSION	20.00	SqFt	M	
			RUTTING	90.00	SqFt	L	
			ALLIGATOR CR	400.00	SqFt	M	
			RUTTING	200.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			RUTTING	160.00	SqFt	M	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	160.00	SqFt	M	
			RUTTING	120.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			L & T CR	15.00	Ft	L	
			POTHOLE	1.00	Count	L	
			POTHOLE	2.00	Count	H	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			RUTTING	150.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	15.00	Ft	M	
ALLIGATOR CR	20.00	SqFt	H				
RUTTING	80.00	SqFt	M				
EDGE CR	15.00	Ft	M				
RUTTING	150.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
47	Saddlebrook Ln	47-1	ALLIGATOR CR	60.00	SqFt	M	34.7
			DEPRESSION	50.00	SqFt	L	
			WEATHERING	40.00	SqFt	L	
			POTHOLE	1.00	Count	L	
48	Sun Hill Ln	48-1	L & T CR	23.00	Ft	L	41.5
			RUTTING	80.00	SqFt	M	
			L & T CR	35.00	Ft	L	
			L & T CR	23.00	Ft	L	
			L & T CR	23.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	H	
			RUTTING	60.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	L	
			L & T CR	23.00	Ft	L	
			LANE SH DROP	100.00	Ft	H	
			L & T CR	22.00	Ft	L	
			RUTTING	150.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			EDGE CR	40.00	Ft	H	
			LANE SH DROP	100.00	Ft	M	
			ALLIGATOR CR	170.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			BUMPS/SAGS	23.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			BUMPS/SAGS	23.00	Ft	L	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
L & T CR	736.00	Ft	L				
RUTTING	50.00	SqFt	L				
DEPRESSION	60.00	SqFt	L				
L & T CR	23.00	Ft	L				
RUTTING	50.00	SqFt	L				
BUMPS/SAGS	23.00	Ft	L				
49	E. Briar Patch Ln	49-1	L & T CR	20.00	Ft	L	81.1
			LANE SH DROP	50.00	Ft	M	
			BLOCK CR	150.00	SqFt	L	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	50.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			EDGE CR	60.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	70.00	Ft	H	
			LANE SH DROP	60.00	Ft	L	
DEPRESSION	50.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
49	E. Briar Patch Ln	49-2	L & T CR	24.00	Ft	L	44.5
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
			LANE SH DROP	80.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			ALLIGATOR CR	90.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			BLOCK CR	120.00	SqFt	M	
			RUTTING	35.00	SqFt	L	
			EDGE CR	35.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	70.00	Ft	M	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			BLOCK CR	100.00	SqFt	M	
			LANE SH DROP	60.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	80.00	Ft	M	
			EDGE CR	10.00	Ft	H	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			BLOCK CR	80.00	SqFt	M	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	70.00	Ft	M	
LANE SH DROP	15.00	Ft	M				
POTHOLE	1.00	Count	M				
ALLIGATOR CR	150.00	SqFt	M				
ALLIGATOR CR	100.00	SqFt	M				
RUTTING	40.00	SqFt	L				
EDGE CR	20.00	Ft	H				
L & T CR	769.00	Ft	L				
L & T CR	24.00	Ft	L				
BUMPS/SAGS	24.00	Ft	L				
BUMPS/SAGS	24.00	Ft	L				
50	E. Hunt Master Ln	50-1	ALLIGATOR CR	25.00	SqFt	L	68.7
			L & T CR	551.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	10.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
LANE SH DROP	15.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
50	E. Hunt Master Ln	50-1	ALLIGATOR CR	30.00	SqFt	L	68.7
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	500.00	SqFt	L	
50	E. Hunt Master Ln	50-2	L & T CR	60.00	Ft	L	76.4
			BLOCK CR	120.00	SqFt	L	
			DEPRESSION	15.00	SqFt	L	
			LANE SH DROP	15.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			EDGE CR	15.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			L & T CR	120.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
50	E. Hunt Master Ln	50-3	L & T CR	24.00	Ft	L	42.6
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	500.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			EDGE CR	25.00	Ft	H	
			ALLIGATOR CR	1,440.00	SqFt	L	
			ALLIGATOR CR	1,000.00	SqFt	L	
			EDGE CR	15.00	Ft	M	
			EDGE CR	100.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			BLOCK CR	250.00	SqFt	L	
			ALLIGATOR CR	1,500.00	SqFt	L	
51	Fox Hill Ct	51-1	L & T CR	12.00	Ft	L	81.7
			L & T CR	100.00	Ft	L	
			EDGE CR	10.00	Ft	L	
			L & T CR	80.00	Ft	L	
			L & T CR	12.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			L & T CR	6.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			WEATHERING	60.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	12.00	Ft	L	
			EDGE CR	15.00	Ft	L	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			DEPRESSION	30.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			DEPRESSION	30.00	SqFt	L	
			EDGE CR	15.00	Ft	M	
LANE SH DROP	40.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
52	Fox Hill Dr	52-1	ALLIGATOR CR	120.00	SqFt	M	43.2
			EDGE CR	10.00	Ft	M	
			WEATHERING	480.00	SqFt	L	
			L & T CR	24.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	100.00	Ft	M	
			L & T CR	500.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			PATCH/UT CUT	120.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	60.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			PATCH/UT CUT	120.00	SqFt	H	
			BUMPS/SAGS	24.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			BLOCK CR	600.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			BLOCK CR	1,200.00	SqFt	M	
			EDGE CR	25.00	Ft	M	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	50.00	Ft	L	
			PATCH/UT CUT	20.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			BLOCK CR	150.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			EDGE CR	60.00	Ft	H	
			L & T CR	900.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	M	
			POTHOLE	4.00	Count	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	40.00	Ft	H	
			RUTTING	60.00	SqFt	L	
			BLOCK CR	300.00	SqFt	M	
			ALLIGATOR CR	250.00	SqFt	M	
			LANE SH DROP	40.00	Ft	M	
ALLIGATOR CR	600.00	SqFt	M				
EDGE CR	60.00	Ft	M				
RUTTING	80.00	SqFt	L				
EDGE CR	40.00	Ft	H				
ALLIGATOR CR	250.00	SqFt	M				
ALLIGATOR CR	400.00	SqFt	M				
LANE SH DROP	50.00	Ft	M				
LANE SH DROP	10.00	Ft	H				
BLOCK CR	24.00	SqFt	M				
ALLIGATOR CR	300.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
52	Fox Hill Dr	52-1	LANE SH DROP	40.00	Ft	L	43.2
			RUTTING	100.00	SqFt	M	
			EDGE CR	20.00	Ft	M	
			BLOCK CR	1,200.00	SqFt	M	
			BLOCK CR	1,200.00	SqFt	M	
52	Fox Hill Dr	52-2	ALLIGATOR CR	100.00	SqFt	L	75.8
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	40.00	Ft	M	
			BLOCK CR	20.00	SqFt	L	
			L & T CR	900.00	Ft	L	
			ALLIGATOR CR	14.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
LANE SH DROP	14.00	Ft	H				
EDGE CR	15.00	Ft	H				
LANE SH DROP	40.00	Ft	M				
53	Fox Tail Ln	53-1	LANE SH DROP	100.00	Ft	L	78.3
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			EDGE CR	100.00	Ft	L	
			EDGE CR	85.00	Ft	M	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	25.00	Ft	L	
			DEPRESSION	40.00	SqFt	L	
			ALLIGATOR CR	45.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
54	Meadow Hill Ln	54-1	L & T CR	100.00	Ft	L	74.7
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			LANE SH DROP	10.00	Ft	H	
			L & T CR	40.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	30.00	Ft	L	
LANE SH DROP	15.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
54	Meadow Hill Ln	54-1	L & T CR	25.00	Ft	L	74.7
			L & T CR	20.00	Ft	L	
			LANE SH DROP	100.00	Ft	L	
			LANE SH DROP	50.00	Ft	H	
			EDGE CR	75.00	Ft	M	
			LANE SH DROP	50.00	Ft	L	
			RUTTING	150.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	90.00	SqFt	L	
			ALLIGATOR CR	75.00	SqFt	L	
			RUTTING	80.00	SqFt	L	
			LANE SH DROP	60.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	80.00	Ft	M	
			EDGE CR	30.00	Ft	M	
			EDGE CR	15.00	Ft	L	
			RUTTING	90.00	SqFt	L	
			BUMPS/SAGS	40.00	Ft	L	
			L & T CR	950.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
DEPRESSION	50.00	SqFt	L				
L & T CR	20.00	Ft	L				
54	Meadow Hill Ln	54-2	DEPRESSION	20.00	SqFt	L	50.3
			BUMPS/SAGS	24.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	L	
			L & T CR	150.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			DEPRESSION	25.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	30.00	SqFt	L	
			RUTTING	45.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	15.00	Ft	M	
			RUTTING	60.00	SqFt	L	
			ALLIGATOR CR	240.00	SqFt	L	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			L & T CR	70.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	M	
ALLIGATOR CR	20.00	SqFt	M				
LANE SH DROP	30.00	Ft	L				
55	Red Fox Ct	55-1	L & T CR	150.00	Ft	L	45.3
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
LANE SH DROP	60.00	Ft	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
55	Red Fox Ct	55-1	ALLIGATOR CR	100.00	SqFt	M	45.3
			L & T CR	24.00	Ft	L	
			BLOCK CR	100.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			RUTTING	80.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			EDGE CR	50.00	Ft	H	
			DEPRESSION	50.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			RAVELING	50.00	SqFt	H	
			ALLIGATOR CR	150.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			ALLIGATOR CR	400.00	SqFt	M	
			WEATHERING	200.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			RUTTING	100.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	1,171.00	Ft	L	
			ALLIGATOR CR	180.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	35.00	Ft	H	
			L & T CR	24.00	Ft	L	
			WEATHERING	100.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
LANE SH DROP	25.00	Ft	H				
ALLIGATOR CR	100.00	SqFt	M				
EDGE CR	5.00	Ft	H				
RUTTING	60.00	SqFt	L				
L & T CR	24.00	Ft	L				
RUTTING	100.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
55	Red Fox Ct	55-1	L & T CR	24.00	Ft	L	45.3
			EDGE CR	20.00	Ft	M	
			EDGE CR	80.00	Ft	H	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			RAVELING	10.00	SqFt	H	
			EDGE CR	15.00	Ft	H	
56	E. Red Coat Dr	56-1	ALLIGATOR CR	200.00	SqFt	L	37.1
			DEPRESSION	50.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			SHOVING	10.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			SHOVING	880.00	SqFt	H	
			EDGE CR	35.00	Ft	H	
			L & T CR	21.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			SHOVING	200.00	SqFt	M	
			L & T CR	21.00	Ft	L	
			EDGE CR	100.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	80.00	Ft	L	
			SHOVING	60.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			DEPRESSION	50.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			RUTTING	60.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			SHOVING	150.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	40.00	Ft	L	
			L & T CR	2,314.00	Ft	L	
EDGE CR	100.00	Ft	M				
ALLIGATOR CR	30.00	SqFt	M				
EDGE CR	15.00	Ft	H				
L & T CR	21.00	Ft	L				
ALLIGATOR CR	80.00	SqFt	L				
DEPRESSION	100.00	SqFt	L				
ALLIGATOR CR	80.00	SqFt	L				
L & T CR	21.00	Ft	L				
EDGE CR	20.00	Ft	L				
L & T CR	21.00	Ft	L				
L & T CR	21.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
56	E. Red Coat Dr	56-1	L & T CR	21.00	Ft	L	37.1
			EDGE CR	40.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			EDGE CR	100.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			RAVELING	880.00	SqFt	H	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	H	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	150.00	SqFt	L	
			PATCH/UT CUT	20.00	SqFt	H	
			PATCH/UT CUT	10.00	SqFt	H	
			L & T CR	21.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			L & T CR	21.00	Ft	L	
			EDGE CR	15.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	20.00	Ft	L	
			EDGE CR	70.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			PATCH/UT CUT	300.00	SqFt	H	
			EDGE CR	10.00	Ft	M	
			LANE SH DROP	40.00	Ft	M	
			EDGE CR	40.00	Ft	L	
			LANE SH DROP	25.00	Ft	L	
			L & T CR	10.00	Ft	L	
			L & T CR	21.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			L & T CR	21.00	Ft	L	
			BUMPS/SAGS	21.00	Ft	L	
			PATCH/UT CUT	5.00	SqFt	H	
			EDGE CR	65.00	Ft	M	
PATCH/UT CUT	5.00	SqFt	H				
ALLIGATOR CR	200.00	SqFt	L				
L & T CR	21.00	Ft	L				
DEPRESSION	40.00	SqFt	L				
ALLIGATOR CR	200.00	SqFt	L				
L & T CR	21.00	Ft	L				
ALLIGATOR CR	60.00	SqFt	M				
L & T CR	21.00	Ft	L				
BLOCK CR	100.00	SqFt	L				
57	Moorfield Ct	57-1	POTHOLE	1.00	Count	H	37.8
			PATCH/UT CUT	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			EDGE CR	30.00	Ft	H	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
57	Moorfield Ct	57-1	LANE SH DROP	20.00	Ft	L	37.8
			ALLIGATOR CR	90.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			EDGE CR	65.00	Ft	M	
			EDGE CR	15.00	Ft	M	
			L & T CR	100.00	Ft	L	
			BLOCK CR	250.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
			LANE SH DROP	65.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			SLIPPAGE CR	70.00	SqFt	L	
			ALLIGATOR CR	600.00	SqFt	M	
			RUTTING	80.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
			L & T CR	23.00	Ft	L	
			L & T CR	30.00	Ft	L	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			EDGE CR	60.00	Ft	H	
			EDGE CR	25.00	Ft	L	
			L & T CR	80.00	Ft	L	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	25.00	SqFt	M	
PATCH/UT CUT	10.00	SqFt	H				
ALLIGATOR CR	80.00	SqFt	M				
ALLIGATOR CR	30.00	SqFt	M				
L & T CR	23.00	Ft	L				
58	N. Red Coat Dr	58-1	L & T CR	22.00	Ft	L	53.4
			L & T CR	637.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			EDGE CR	60.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			EDGE CR	60.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	35.00	Ft	H	
			L & T CR	150.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
L & T CR	22.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
58	N. Red Coat Dr	58-1	ALLIGATOR CR	80.00	SqFt	L	53.4
			EDGE CR	50.00	Ft	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			PATCH/UT CUT	1.00	SqFt	H	
			L & T CR	22.00	Ft	L	
59	S. Red Coat Dr	59-1	BUMPS/SAGS	22.00	Ft	L	59.3
			L & T CR	22.00	Ft	L	
			L & T CR	20.00	Ft	L	
			DEPRESSION	80.00	SqFt	L	
			L & T CR	30.00	Ft	L	
			L & T CR	50.00	Ft	L	
			EDGE CR	40.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	30.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	15.00	Ft	L	
			DEPRESSION	150.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	180.00	SqFt	M	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	20.00	Ft	L	
			EDGE CR	50.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	22.00	Ft	L	
EDGE CR	40.00	Ft	L				
L & T CR	1,549.00	Ft	L				
ALLIGATOR CR	80.00	SqFt	L				
ALLIGATOR CR	50.00	SqFt	L				
ALLIGATOR CR	40.00	SqFt	L				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				
RUTTING	80.00	SqFt	L				
ALLIGATOR CR	30.00	SqFt	M				
L & T CR	80.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
59	S. Red Coat Dr	59-1	ALLIGATOR CR	120.00	SqFt	L	59.3
			EDGE CR	25.00	Ft	L	
60	S. Silver Fox Dr	60-1	LANE SH DROP	30.00	Ft	M	65.2
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			LANE SH DROP	80.00	Ft	H	
			L & T CR	20.00	Ft	L	
			L & T CR	21.00	Ft	L	
			EDGE CR	40.00	Ft	H	
			L & T CR	1,882.00	Ft	L	
			EDGE CR	120.00	Ft	M	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	70.00	Ft	H	
			EDGE CR	20.00	Ft	H	
			EDGE CR	50.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			EDGE CR	50.00	Ft	H	
			L & T CR	21.00	Ft	L	
			EDGE CR	80.00	Ft	H	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	70.00	Ft	M	
			L & T CR	21.00	Ft	L	
			EDGE CR	25.00	Ft	H	
			L & T CR	100.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	20.00	Ft	L	
			EDGE CR	100.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
ALLIGATOR CR	200.00	SqFt	L				
L & T CR	21.00	Ft	L				
EDGE CR	40.00	Ft	M				
LANE SH DROP	120.00	Ft	M				
EDGE CR	100.00	Ft	M				
EDGE CR	30.00	Ft	H				
ALLIGATOR CR	90.00	SqFt	L				
EDGE CR	30.00	Ft	M				
L & T CR	21.00	Ft	L				
EDGE CR	15.00	Ft	M				
LANE SH DROP	25.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
60	S. Silver Fox Dr	60-1	L & T CR	21.00	Ft	L	65.2
			DEPRESSION	60.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			L & T CR	35.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			EDGE CR	50.00	Ft	H	
			L & T CR	21.00	Ft	L	
61	W. Briar Patch Ln	61-1	LANE SH DROP	20.00	Ft	H	35.7
			EDGE CR	25.00	Ft	H	
			L & T CR	30.00	Ft	L	
			EDGE CR	60.00	Ft	M	
			EDGE CR	40.00	Ft	H	
			DEPRESSION	30.00	SqFt	L	
			RUTTING	150.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			RUTTING	150.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			RUTTING	100.00	SqFt	L	
			EDGE CR	30.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			L & T CR	10.00	Ft	H	
			L & T CR	25.00	Ft	H	
			RUTTING	100.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	23.00	Ft	M	
			L & T CR	300.00	Ft	L	
			L & T CR	300.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			SLIPPAGE CR	60.00	SqFt	M	
			BUMPS/SAGS	23.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			SLIPPAGE CR	30.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			EDGE CR	70.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
ALLIGATOR CR	80.00	SqFt	L				
L & T CR	15.00	Ft	L				
L & T CR	15.00	Ft	H				
RUTTING	60.00	SqFt	L				
EDGE CR	25.00	Ft	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
61	W. Briar Patch Ln	61-1	EDGE CR	110.00	Ft	H	35.7
			SLIPPAGE CR	55.00	SqFt	M	
			ALLIGATOR CR	240.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	
			SLIPPAGE CR	100.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			SLIPPAGE CR	150.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	200.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			BUMPS/SAGS	23.00	Ft	L	
			SLIPPAGE CR	770.00	SqFt	H	
			EDGE CR	25.00	Ft	H	
ALLIGATOR CR	50.00	SqFt	L				
62	W. Hunt Master Ln	62-1	L & T CR	20.00	Ft	L	62.4
			L & T CR	60.00	Ft	L	
			L & T CR	20.00	Ft	L	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	2,234.00	Ft	L	
			L & T CR	20.00	Ft	L	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	80.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	25.00	Ft	H	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	12.00	Ft	L	
			L & T CR	30.00	Ft	L	
			PATCH/UT CUT	30.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			EDGE CR	60.00	Ft	M	
			LANE SH DROP	80.00	Ft	M	
			L & T CR	20.00	Ft	L	
			EDGE CR	80.00	Ft	L	
			EDGE CR	20.00	Ft	M	
ALLIGATOR CR	40.00	SqFt	M				
ALLIGATOR CR	200.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
62	W. Hunt Master Ln	62-1	ALLIGATOR CR	80.00	SqFt	L	62.4
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			PATCH/UT CUT	5.00	SqFt	H	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			BUMPS/SAGS	20.00	Ft	L	
			L & T CR	40.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			EDGE CR	100.00	Ft	M	
			L & T CR	20.00	Ft	L	
			L & T CR	30.00	Ft	M	
			DEPRESSION	20.00	SqFt	H	
ALLIGATOR CR	60.00	SqFt	L				
63	W. Red Coat Dr	63-1	L & T CR	22.00	Ft	L	60.7
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			RUTTING	45.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	50.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			PATCH/UT CUT	70.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	30.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			EDGE CR	70.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	50.00	Ft	H	
			BUMPS/SAGS	22.00	Ft	L	
			LANE SH DROP	100.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	70.00	Ft	L	
BUMPS/SAGS	22.00	Ft	L				
EDGE CR	50.00	Ft	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
63	W. Red Coat Dr	63-1	ALLIGATOR CR	60.00	SqFt	L	60.7
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	M	
			EDGE CR	70.00	Ft	L	
			L & T CR	30.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	40.00	Ft	L	
			EDGE CR	40.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	80.00	Ft	H	
			EDGE CR	40.00	Ft	M	
			L & T CR	22.00	Ft	L	
			L & T CR	1,276.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	40.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	25.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	M	
			LANE SH DROP	30.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			EDGE CR	100.00	Ft	M	
			BLOCK CR	700.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
LANE SH DROP	70.00	Ft	M				
PATCH/UT CUT	40.00	SqFt	M				
BUMPS/SAGS	22.00	Ft	L				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				
ALLIGATOR CR	200.00	SqFt	L				
BUMPS/SAGS	22.00	Ft	L				
BUMPS/SAGS	22.00	Ft	L				
L & T CR	22.00	Ft	L				
BUMPS/SAGS	22.00	Ft	L				
BUMPS/SAGS	22.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
64	Arctic Ct	64-1	L & T CR	24.00	Ft	L	35.6
			EDGE CR	50.00	Ft	M	
			LANE SH DROP	15.00	Ft	M	
			RUTTING	15.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			L & T CR	24.00	Ft	L	
			DEPRESSION	25.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			L & T CR	10.00	Ft	L	
			RUTTING	30.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			ALLIGATOR CR	250.00	SqFt	M	
			LANE SH DROP	10.00	Ft	M	
			DEPRESSION	40.00	SqFt	L	
			L & T CR	12.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	M	
			BLOCK CR	40.00	SqFt	M	
			LANE SH DROP	25.00	Ft	M	
			POTHOLE	1.00	Count	H	
			LANE SH DROP	40.00	Ft	H	
			RUTTING	20.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	100.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	15.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
			RUTTING	45.00	SqFt	L	
			WEATHERING	90.00	SqFt	L	
			RUTTING	35.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
DEPRESSION	25.00	SqFt	L				
ALLIGATOR CR	847.00	SqFt	M				
ALLIGATOR CR	125.00	SqFt	M				
L & T CR	12.00	Ft	M				
DEPRESSION	20.00	SqFt	L				
65	Arctic Ln	65-1	DEPRESSION	60.00	SqFt	L	45.1
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	50.00	Ft	M	
			EDGE CR	40.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	M	
			BUMPS/SAGS	26.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
65	Arctic Ln	65-1	ALLIGATOR CR	80.00	SqFt	M	45.1
			ALLIGATOR CR	200.00	SqFt	M	
			BUMPS/SAGS	26.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			RUTTING	100.00	SqFt	M	
			PATCH/UT CUT	160.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	50.00	Ft	M	
			L & T CR	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	125.00	SqFt	M	
			L & T CR	26.00	Ft	L	
			LANE SH DROP	20.00	Ft	H	
			LANE SH DROP	40.00	Ft	L	
			LANE SH DROP	120.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	1,046.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			LANE SH DROP	20.00	Ft	H	
			RUTTING	60.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	26.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			RUTTING	80.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			RUTTING	40.00	SqFt	L	
LANE SH DROP	20.00	Ft	H				
ALLIGATOR CR	50.00	SqFt	L				
ALLIGATOR CR	200.00	SqFt	M				
WEATHERING	100.00	SqFt	L				
66	Black Fox Ln	66-1	EDGE CR	15.00	Ft	H	44.7
			L & T CR	20.00	Ft	L	
			L & T CR	12.00	Ft	L	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	24.00	Ft	L	
			DEPRESSION	15.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	100.00	Ft	H	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			RAVELING	15.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	24.00	Ft	L	
L & T CR	10.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
66	Black Fox Ln	66-1	L & T CR	24.00	Ft	L	44.7
			EDGE CR	70.00	Ft	M	
			L & T CR	24.00	Ft	L	
			L & T CR	20.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			ALLIGATOR CR	90.00	SqFt	M	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			PATCH/UT CUT	100.00	SqFt	L	
			EDGE CR	35.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			LANE SH DROP	60.00	Ft	H	
			EDGE CR	20.00	Ft	M	
			L & T CR	20.00	Ft	H	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	15.00	Ft	H	
			EDGE CR	25.00	Ft	H	
			L & T CR	24.00	Ft	L	
			RUTTING	25.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			RAVELING	20.00	SqFt	H	
			EDGE CR	20.00	Ft	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			L & T CR	12.00	Ft	L	
			EDGE CR	10.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			RUTTING	85.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			EDGE CR	20.00	Ft	H	
			LANE SH DROP	70.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
EDGE CR	15.00	Ft	M				
ALLIGATOR CR	30.00	SqFt	M				
L & T CR	12.00	Ft	L				
L & T CR	24.00	Ft	L				
LANE SH DROP	10.00	Ft	H				
L & T CR	24.00	Ft	L				
ALLIGATOR CR	80.00	SqFt	L				
LANE SH DROP	20.00	Ft	H				
ALLIGATOR CR	100.00	SqFt	M				
L & T CR	24.00	Ft	L				
LANE SH DROP	25.00	Ft	H				
L & T CR	30.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
67	Dixon Way	67-1	ALLIGATOR CR	120.00	SqFt	L	40.2
			RUTTING	75.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	100.00	Ft	L	
			POTHOLE	2.00	Count	H	
			PATCH/UT CUT	5.00	SqFt	H	
			LANE SH DROP	60.00	Ft	M	
			RUTTING	60.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			LANE SH DROP	60.00	Ft	M	
			LANE SH DROP	40.00	Ft	H	
			RUTTING	150.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	100.00	Ft	H	
			L & T CR	25.00	Ft	L	
			L & T CR	25.00	Ft	L	
			RUTTING	500.00	SqFt	L	
			ALLIGATOR CR	600.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
			DEPRESSION	30.00	SqFt	M	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			ALLIGATOR CR	180.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			WEATHERING	60.00	SqFt	L	
			RUTTING	120.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	500.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			EDGE CR	75.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			PATCH/UT CUT	25.00	SqFt	H	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	1,200.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	50.00	Ft	L	
			BUMPS/SAGS	25.00	Ft	M	
ALLIGATOR CR	150.00	SqFt	M				
ALLIGATOR CR	60.00	SqFt	L				
L & T CR	25.00	Ft	M				
LANE SH DROP	20.00	Ft	M				
LANE SH DROP	25.00	Ft	H				
ALLIGATOR CR	150.00	SqFt	L				
ALLIGATOR CR	200.00	SqFt	M				
L & T CR	25.00	Ft	L				
RAVELING	50.00	SqFt	H				
ALLIGATOR CR	80.00	SqFt	L				
RUTTING	300.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
67	Dixon Way	67-1	RUTTING	40.00	SqFt	L	40.2
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	25.00	Ft	L	
			RAVELING	200.00	SqFt	M	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	50.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			RAVELING	150.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	M	
			ALLIGATOR CR	400.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			WEATHERING	50.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	L	
ALLIGATOR CR	300.00	SqFt	M				
ALLIGATOR CR	80.00	SqFt	M				
68	Gray Ln	68-1	ALLIGATOR CR	110.00	SqFt	M	31.1
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	19.00	Ft	L	
			ALLIGATOR CR	25.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			L & T CR	20.00	Ft	L	
			LANE SH DROP	10.00	Ft	L	
			ALLIGATOR CR	90.00	SqFt	M	
			L & T CR	23.00	Ft	M	
			LANE SH DROP	70.00	Ft	L	
			DEPRESSION	5.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	H	
			L & T CR	23.00	Ft	M	
			L & T CR	23.00	Ft	L	
			RUTTING	30.00	SqFt	L	
			WEATHERING	300.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	110.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
			ALLIGATOR CR	75.00	SqFt	M	
			L & T CR	23.00	Ft	M	
			L & T CR	23.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			RUTTING	90.00	SqFt	L	
			RUTTING	110.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
L & T CR	23.00	Ft	L				
ALLIGATOR CR	40.00	SqFt	L				
LANE SH DROP	25.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
68	Gray Ln	68-1	EDGE CR	15.00	Ft	M	31.1
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	26.00	Ft	L	
			RUTTING	150.00	SqFt	L	
			L & T CR	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			SLIPPAGE CR	60.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	500.00	SqFt	M	
			L & T CR	26.00	Ft	L	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	90.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	60.00	Ft	M	
			L & T CR	26.00	Ft	L	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			69	Kitt Ln	69-1	L & T CR	
ALLIGATOR CR	200.00	SqFt				M	
ALLIGATOR CR	50.00	SqFt				M	
ALLIGATOR CR	500.00	SqFt				M	
L & T CR	26.00	Ft				L	
L & T CR	26.00	Ft				L	
POTHOLE	3.00	Count				M	
L & T CR	26.00	Ft				L	
EDGE CR	100.00	Ft				H	
BLOCK CR	20.00	SqFt				L	
ALLIGATOR CR	150.00	SqFt				M	
L & T CR	1,500.00	Ft				L	
RUTTING	60.00	SqFt				L	
LANE SH DROP	60.00	Ft				H	
L & T CR	26.00	Ft				L	
ALLIGATOR CR	500.00	SqFt				M	
LANE SH DROP	60.00	Ft				H	
L & T CR	26.00	Ft				L	
ALLIGATOR CR	150.00	SqFt				M	
ALLIGATOR CR	300.00	SqFt				M	
ALLIGATOR CR	100.00	SqFt				M	
ALLIGATOR CR	80.00	SqFt				L	
L & T CR	26.00	Ft				L	
LANE SH DROP	40.00	Ft				L	
PATCH/UT CUT	300.00	SqFt				M	
PATCH/UT CUT	5.00	SqFt				H	
ALLIGATOR CR	300.00	SqFt				M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
69	Kitt Ln	69-1	ALLIGATOR CR	150.00	SqFt	M	42.9
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			EDGE CR	30.00	Ft	H	
			PATCH/UT CUT	5.00	SqFt	H	
			ALLIGATOR CR	100.00	SqFt	M	
			BUMPS/SAGS	26.00	Ft	L	
70	N. Silver Fox Dr	70-1	ALLIGATOR CR	80.00	SqFt	L	43.0
			BUMPS/SAGS	24.00	Ft	L	
			L & T CR	24.00	Ft	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			RAVELING	20.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	80.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	H	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	M	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			BUMPS/SAGS	24.00	Ft	L	
			L & T CR	24.00	Ft	M	
			EDGE CR	30.00	Ft	M	
			EDGE CR	80.00	Ft	M	
			LANE SH DROP	15.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			DEPRESSION	40.00	SqFt	M	
			L & T CR	24.00	Ft	M	
			BUMPS/SAGS	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	L	
			LANE SH DROP	80.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	24.00	Ft	L	
BUMPS/SAGS	24.00	Ft	L				
L & T CR	24.00	Ft	M				
BUMPS/SAGS	24.00	Ft	L				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	100.00	SqFt	M				
L & T CR	24.00	Ft	L				
BUMPS/SAGS	24.00	Ft	L				
L & T CR	24.00	Ft	M				
LANE SH DROP	20.00	Ft	L				
ALLIGATOR CR	400.00	SqFt	M				
ALLIGATOR CR	60.00	SqFt	M				
BUMPS/SAGS	24.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
70	N. Silver Fox Dr	70-1	ALLIGATOR CR	100.00	SqFt	M	43.0
			L & T CR	24.00	Ft	M	
			LANE SH DROP	80.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			PATCH/UT CUT	25.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	40.00	Ft	L	
			L & T CR	24.00	Ft	M	
			L & T CR	24.00	Ft	M	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	H	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	60.00	Ft	H	
			L & T CR	24.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			L & T CR	24.00	Ft	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	24.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			BUMPS/SAGS	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	L	
			L & T CR	24.00	Ft	M	
			DEPRESSION	40.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	35.00	Ft	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	220.00	SqFt	M	
			RUTTING	200.00	SqFt	M	
L & T CR	24.00	Ft	L				
L & T CR	24.00	Ft	L				
BUMPS/SAGS	24.00	Ft	L				
ALLIGATOR CR	150.00	SqFt	M				
BUMPS/SAGS	24.00	Ft	L				
L & T CR	24.00	Ft	M				
L & T CR	24.00	Ft	L				
L & T CR	24.00	Ft	M				
ALLIGATOR CR	150.00	SqFt	L				
L & T CR	24.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
70	N. Silver Fox Dr	70-1	BUMPS/SAGS	24.00	Ft	L	43.0
			ALLIGATOR CR	150.00	SqFt	H	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			RUTTING	80.00	SqFt	L	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
71	Nordic Ln	71-1	L & T CR	12.00	Ft	L	40.4
			EDGE CR	80.00	Ft	H	
			L & T CR	19.00	Ft	L	
			L & T CR	15.00	Ft	L	
			RAVELING	5.00	SqFt	H	
			L & T CR	20.00	Ft	L	
			DEPRESSION	10.00	SqFt	L	
			L & T CR	24.00	Ft	M	
			EDGE CR	60.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	20.00	Ft	M	
			LANE SH DROP	85.00	Ft	H	
			EDGE CR	40.00	Ft	L	
			DEPRESSION	10.00	SqFt	L	
			ALLIGATOR CR	240.00	SqFt	M	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			RUTTING	40.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			WEATHERING	200.00	SqFt	L	
			RUTTING	90.00	SqFt	L	
			RUTTING	40.00	SqFt	L	
			ALLIGATOR CR	75.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
L & T CR	12.00	Ft	L				
ALLIGATOR CR	80.00	SqFt	M				
ALLIGATOR CR	110.00	SqFt	M				
72	Parker Rd	72-1	LANE SH DROP	20.00	Ft	M	39.7
			DEPRESSION	30.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	30.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	L	
			BLOCK CR	33.00	SqFt	L	
			RUTTING	120.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			DEPRESSION	100.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	12.00	Ft	L	
ALLIGATOR CR	20.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
72	Parker Rd	72-1	LANE SH DROP	30.00	Ft	M	39.7
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	30.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	33.00	Ft	L	
			L & T CR	20.00	Ft	L	
			WEATHERING	80.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	10.00	Ft	H	
			L & T CR	33.00	Ft	L	
			SLIPPAGE CR	25.00	SqFt	M	
			BLOCK CR	33.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			BUMPS/SAGS	15.00	Ft	L	
			L & T CR	20.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			BLOCK CR	33.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	L	
			DEPRESSION	30.00	SqFt	L	
			BUMPS/SAGS	30.00	Ft	L	
			RUTTING	30.00	SqFt	M	
			EDGE CR	60.00	Ft	H	
			ALLIGATOR CR	320.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	M	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			RAVELING	100.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			L & T CR	200.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			DEPRESSION	40.00	SqFt	L	
			ALLIGATOR CR	600.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
EDGE CR	15.00	Ft	M				
LANE SH DROP	40.00	Ft	H				
ALLIGATOR CR	60.00	SqFt	M				
ALLIGATOR CR	70.00	SqFt	M				
DEPRESSION	20.00	SqFt	L				
DEPRESSION	30.00	SqFt	L				
ALLIGATOR CR	60.00	SqFt	M				
ALLIGATOR CR	60.00	SqFt	L				
BUMPS/SAGS	33.00	Ft	L				
LANE SH DROP	80.00	Ft	H				
L & T CR	800.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
72	Parker Rd	72-1	ALLIGATOR CR	120.00	SqFt	L	39.7
			ALLIGATOR CR	300.00	SqFt	L	
			L & T CR	25.00	Ft	M	
			ALLIGATOR CR	225.00	SqFt	H	
			BUMPS/SAGS	33.00	Ft	L	
			L & T CR	5.00	Ft	H	
			L & T CR	33.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	25.00	Ft	M	
			ALLIGATOR CR	450.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			LANE SH DROP	30.00	Ft	H	
			L & T CR	33.00	Ft	L	
			ALLIGATOR CR	500.00	SqFt	M	
			RUTTING	120.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			PATCH/UT CUT	7.00	SqFt	H	
			ALLIGATOR CR	85.00	SqFt	M	
			LANE SH DROP	50.00	Ft	H	
			RAVELING	25.00	SqFt	H	
			L & T CR	33.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			BLOCK CR	30.00	SqFt	M	
			L & T CR	15.00	Ft	M	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	60.00	Ft	H	
			BUMPS/SAGS	33.00	Ft	L	
			POTHOLE	1.00	Count	L	
			L & T CR	25.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			RUTTING	150.00	SqFt	L	
			L & T CR	25.00	Ft	H	
ALLIGATOR CR	60.00	SqFt	L				
ALLIGATOR CR	90.00	SqFt	M				
L & T CR	33.00	Ft	L				
LANE SH DROP	15.00	Ft	H				
ALLIGATOR CR	40.00	SqFt	M				
ALLIGATOR CR	150.00	SqFt	M				
L & T CR	33.00	Ft	L				
EDGE CR	30.00	Ft	H				
EDGE CR	30.00	Ft	H				
L & T CR	200.00	Ft	M				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	250.00	SqFt	M				
POTHOLE	8.00	Count	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
73	Baltic Cir	73-1	EDGE CR	10.00	Ft	H	42.8
			EDGE CR	50.00	Ft	M	
			L & T CR	23.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	40.00	Ft	M	
			EDGE CR	100.00	Ft	H	
			ALLIGATOR CR	500.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	2,300.00	SqFt	L	
			WEATHERING	80.00	SqFt	L	
			WEATHERING	100.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			RUTTING	60.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			PATCH/UT CUT	200.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	80.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	60.00	Ft	L	
			EDGE CR	25.00	Ft	L	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	L	
			EDGE CR	30.00	Ft	H	
			EDGE CR	70.00	Ft	L	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			EDGE CR	80.00	Ft	M	
			LANE SH DROP	80.00	Ft	L	
LANE SH DROP	20.00	Ft	H				
ALLIGATOR CR	200.00	SqFt	M				
LANE SH DROP	30.00	Ft	H				
EDGE CR	100.00	Ft	H				
ALLIGATOR CR	240.00	SqFt	L				
BUMPS/SAGS	23.00	Ft	L				
L & T CR	130.00	Ft	L				
ALLIGATOR CR	200.00	SqFt	L				
WEATHERING	200.00	SqFt	L				
EDGE CR	20.00	Ft	H				
ALLIGATOR CR	300.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
73	Baltic Cir	73-1	EDGE CR	50.00	Ft	M	42.8
			EDGE CR	15.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			DEPRESSION	60.00	SqFt	H	
			EDGE CR	50.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			BLOCK CR	75.00	SqFt	L	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	20.00	Ft	M	
			DEPRESSION	60.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	25.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
LANE SH DROP	100.00	Ft	M				
LANE SH DROP	100.00	Ft	H				
LANE SH DROP	40.00	Ft	H				
L & T CR	1,701.00	Ft	L				
74	Birch Ct	74-1	EDGE CR	10.00	Ft	M	38.9
			ALLIGATOR CR	30.00	SqFt	M	
			RUTTING	130.00	SqFt	M	
			LANE SH DROP	10.00	Ft	H	
			EDGE CR	10.00	Ft	H	
			ALLIGATOR CR	50.00	SqFt	L	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			DEPRESSION	150.00	SqFt	L	
			L & T CR	15.00	Ft	M	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	100.00	Ft	H	
			ALLIGATOR CR	300.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	60.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			ALLIGATOR CR	85.00	SqFt	L	
			L & T CR	319.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
WEATHERING	100.00	SqFt	L				
DEPRESSION	80.00	SqFt	L				
ALLIGATOR CR	100.00	SqFt	L				
LANE SH DROP	30.00	Ft	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
74	Birch Ct	74-1	L & T CR	150.00	Ft	L	38.9
			WEATHERING	120.00	SqFt	L	
			LANE SH DROP	60.00	Ft	M	
			PATCH/UT CUT	5.00	SqFt	M	
75	Derby Rd	75-1	ALLIGATOR CR	100.00	SqFt	M	23.8
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	160.00	SqFt	M	
			ALLIGATOR CR	30.00	SqFt	M	
			RUTTING	100.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	12.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	H	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	80.00	Ft	M	
			LANE SH DROP	40.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	25.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			LANE SH DROP	25.00	Ft	H	
			L & T CR	200.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	H	
			RUTTING	80.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
			EDGE CR	80.00	Ft	H	
			EDGE CR	100.00	Ft	M	
			DEPRESSION	60.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	M	
			RUTTING	30.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			EDGE CR	40.00	Ft	H	
			PATCH/UT CUT	7.00	SqFt	H	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			POTHOLE	1.00	Count	L	
EDGE CR	40.00	Ft	H				
ALLIGATOR CR	80.00	SqFt	M				
RAVELING	120.00	SqFt	H				
RUTTING	40.00	SqFt	L				
ALLIGATOR CR	50.00	SqFt	M				
PATCH/UT CUT	5.00	SqFt	H				
EDGE CR	35.00	Ft	H				
LANE SH DROP	50.00	Ft	H				
RAVELING	40.00	SqFt	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
75	Derby Rd	75-1	ALLIGATOR CR	200.00	SqFt	M	23.8
			L & T CR	22.00	Ft	L	
			BLOCK CR	120.00	SqFt	M	
			LANE SH DROP	80.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			WEATHERING	20.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			PATCH/UT CUT	100.00	SqFt	H	
			EDGE CR	200.00	Ft	H	
			ALLIGATOR CR	1,000.00	SqFt	L	
			EDGE CR	40.00	Ft	H	
			BLOCK CR	150.00	SqFt	M	
			DEPRESSION	75.00	SqFt	M	
			RAVELING	150.00	SqFt	M	
			ALLIGATOR CR	250.00	SqFt	M	
			RUTTING	60.00	SqFt	L	
			DEPRESSION	100.00	SqFt	M	
			EDGE CR	150.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	300.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	H	
			BLOCK CR	180.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	M	
			RUTTING	20.00	SqFt	L	
			RUTTING	100.00	SqFt	M	
			LANE SH DROP	60.00	Ft	L	
			PATCH/UT CUT	1,100.00	SqFt	L	
			RUTTING	20.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			LANE SH DROP	100.00	Ft	H	
			EDGE CR	20.00	Ft	M	
			BLOCK CR	300.00	SqFt	M	
			PATCH/UT CUT	80.00	SqFt	H	
			EDGE CR	50.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	H	
LANE SH DROP	150.00	Ft	M				
L & T CR	40.00	Ft	M				
ALLIGATOR CR	100.00	SqFt	H				
L & T CR	1,200.00	Ft	H				
EDGE CR	30.00	Ft	H				
EDGE CR	100.00	Ft	H				
ALLIGATOR CR	60.00	SqFt	M				
EDGE CR	50.00	Ft	H				
LANE SH DROP	40.00	Ft	H				
EDGE CR	35.00	Ft	M				
EDGE CR	40.00	Ft	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
75	Derby Rd	75-1	EDGE CR	60.00	Ft	H	23.8
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	40.00	Ft	H	
			BLOCK CR	240.00	SqFt	L	
			EDGE CR	60.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			PATCH/UT CUT	60.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	20.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
76	Elm Ct	76-1	ALLIGATOR CR	1,100.00	SqFt	M	32.2
			L & T CR	100.00	Ft	L	
			ALLIGATOR CR	1,400.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	50.00	Ft	H	
			EDGE CR	30.00	Ft	M	
			LANE SH DROP	15.00	Ft	M	
			EDGE CR	25.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	10.00	Ft	M	
			POTHOLE	1.00	Count	L	
			L & T CR	22.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	M	
			PATCH/UT CUT	20.00	SqFt	L	
			ALLIGATOR CR	220.00	SqFt	L	
			ALLIGATOR CR	5.00	SqFt	H	
			PATCH/UT CUT	15.00	SqFt	L	
			PATCH/UT CUT	15.00	SqFt	L	
			PATCH/UT CUT	5.00	SqFt	L	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	15.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	160.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			PATCH/UT CUT	100.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			RAVELING	160.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	L	
ALLIGATOR CR	80.00	SqFt	L				
RUTTING	150.00	SqFt	L				
POTHOLE	1.00	Count	M				
WEATHERING	100.00	SqFt	L				
BLOCK CR	220.00	SqFt	L				
LANE SH DROP	20.00	Ft	H				
DEPRESSION	50.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
76	Elm Ct	76-1	ALLIGATOR CR	5.00	SqFt	H	32.2
			EDGE CR	15.00	Ft	H	
			PATCH/UT CUT	300.00	SqFt	L	
77	Hawthorne Dr	77-1	ALLIGATOR CR	100.00	SqFt	L	52.8
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	M	
			EDGE CR	30.00	Ft	H	
			L & T CR	23.00	Ft	L	
			BLOCK CR	150.00	SqFt	L	
			DEPRESSION	15.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			RUTTING	25.00	SqFt	L	
			L & T CR	1,700.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	70.00	Ft	L	
			ALLIGATOR CR	240.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			BLOCK CR	200.00	SqFt	L	
			EDGE CR	30.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	45.00	Ft	M	
			L & T CR	40.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			EDGE CR	25.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	200.00	Ft	L	
			L & T CR	12.00	Ft	L	
			EDGE CR	40.00	Ft	H	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			BLOCK CR	30.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			L & T CR	100.00	Ft	L	
EDGE CR	50.00	Ft	M				
EDGE CR	100.00	Ft	H				
EDGE CR	25.00	Ft	H				
EDGE CR	50.00	Ft	H				
LANE SH DROP	25.00	Ft	M				
EDGE CR	20.00	Ft	M				
PATCH/UT CUT	30.00	SqFt	L				
ALLIGATOR CR	60.00	SqFt	M				
LANE SH DROP	60.00	Ft	H				
BUMPS/SAGS	13.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
77	Hawthorne Dr	77-1	DEPRESSION	20.00	SqFt	L	52.8
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			BUMPS/SAGS	23.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			LANE SH DROP	15.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	12.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	100.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			ALLIGATOR CR	25.00	SqFt	M	
			EDGE CR	100.00	Ft	H	
			ALLIGATOR CR	250.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	150.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	20.00	Ft	H	
			L & T CR	50.00	Ft	L	
			RUTTING	80.00	SqFt	L	
			BUMPS/SAGS	13.00	Ft	M	
			EDGE CR	40.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	L	
			L & T CR	30.00	Ft	L	
ALLIGATOR CR	210.00	SqFt	L				
ALLIGATOR CR	300.00	SqFt	M				
LANE SH DROP	80.00	Ft	M				
LANE SH DROP	15.00	Ft	H				
EDGE CR	20.00	Ft	H				
78	Oak Ct	78-1	DEPRESSION	40.00	SqFt	L	41.1
			DEPRESSION	15.00	SqFt	L	
			L & T CR	220.00	Ft	L	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			WEATHERING	10.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	30.00	SqFt	L	
			RUTTING	120.00	SqFt	L	
			ALLIGATOR CR	45.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	12.00	Ft	L	
			WEATHERING	300.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
EDGE CR	20.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
78	Oak Ct	78-1	EDGE CR	20.00	Ft	M	41.1
			EDGE CR	20.00	Ft	M	
			L & T CR	150.00	Ft	L	
			LANE SH DROP	10.00	Ft	M	
			L & T CR	15.00	Ft	L	
			EDGE CR	60.00	Ft	M	
			WEATHERING	80.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			L & T CR	30.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			EDGE CR	10.00	Ft	L	
79	Spruce Ct	79-1	EDGE CR	10.00	Ft	H	27.6
			WEATHERING	200.00	SqFt	L	
			L & T CR	12.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			ALLIGATOR CR	120.00	SqFt	L	
			LANE SH DROP	10.00	Ft	H	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	2,700.00	SqFt	M	
			ALLIGATOR CR	90.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	10.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	L	
			EDGE CR	10.00	Ft	H	
			EDGE CR	10.00	Ft	M	
L & T CR	80.00	Ft	L				
RAVELING	200.00	SqFt	H				
80	Sylvan Woods Ct	80-1	LANE SH DROP	15.00	Ft	M	47.1
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			RUTTING	60.00	SqFt	M	
			LANE SH DROP	30.00	Ft	H	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
			EDGE CR	10.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	60.00	Ft	H	
ALLIGATOR CR	120.00	SqFt	L				
LANE SH DROP	40.00	Ft	M				
81	Hickory Ave	81-1	ALLIGATOR CR	40.00	SqFt	M	37.1
			L & T CR	45.00	Ft	M	
			L & T CR	16.00	Ft	M	
			LANE SH DROP	300.00	Ft	H	
			L & T CR	16.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			PATCH/UT CUT	5.00	SqFt	H	
BLOCK CR	500.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
81	Hickory Ave	81-1	LANE SH DROP	80.00	Ft	H	37.1
			EDGE CR	10.00	Ft	H	
			L & T CR	16.00	Ft	L	
			POTHOLE	1.00	Count	H	
			RAVELING	30.00	SqFt	M	
			RAVELING	20.00	SqFt	H	
			LANE SH DROP	300.00	Ft	H	
			POTHOLE	5.00	Count	M	
			RAVELING	25.00	SqFt	M	
			POTHOLE	4.00	Count	M	
			EDGE CR	50.00	Ft	M	
			POTHOLE	1.00	Count	H	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	150.00	Ft	H	
			L & T CR	16.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			BLOCK CR	300.00	SqFt	L	
			L & T CR	16.00	Ft	L	
			L & T CR	16.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			WEATHERING	120.00	SqFt	L	
			ALLIGATOR CR	250.00	SqFt	L	
			BUMPS/SAGS	16.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			RAVELING	100.00	SqFt	H	
			BLOCK CR	240.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			EDGE CR	50.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
			ALLIGATOR CR	20.00	SqFt	M	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			SLIPPAGE CR	240.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			BUMPS/SAGS	16.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	16.00	Ft	L	
			BUMPS/SAGS	16.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			PATCH/UT CUT	90.00	SqFt	H	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	80.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	M	
LANE SH DROP	80.00	Ft	H				
LANE SH DROP	60.00	Ft	H				
SLIPPAGE CR	200.00	SqFt	L				
EDGE CR	40.00	Ft	H				
BUMPS/SAGS	16.00	Ft	L				
EDGE CR	300.00	Ft	H				
ALLIGATOR CR	120.00	SqFt	M				
LANE SH DROP	30.00	Ft	H				
ALLIGATOR CR	30.00	SqFt	M				
LANE SH DROP	30.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
81	Hickory Ave	81-1	BLOCK CR	500.00	SqFt	L	37.1
			BLOCK CR	300.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	16.00	Ft	L	
			BLOCK CR	300.00	SqFt	L	
			EDGE CR	60.00	Ft	H	
			L & T CR	16.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			BUMPS/SAGS	16.00	Ft	L	
			BUMPS/SAGS	16.00	Ft	L	
			ALLIGATOR CR	45.00	SqFt	M	
			L & T CR	15.00	Ft	M	
82	King Rd	82-1	ALLIGATOR CR	60.00	SqFt	L	48.2
			EDGE CR	25.00	Ft	H	
			LANE SH DROP	100.00	Ft	H	
			EDGE CR	60.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	25.00	Ft	H	
			EDGE CR	25.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	L	
			LANE SH DROP	75.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	25.00	Ft	H	
			POTHOLE	1.00	Count	M	
			LANE SH DROP	80.00	Ft	H	
			ALLIGATOR CR	220.00	SqFt	L	
83	Maple Ave	83-1	EDGE CR	20.00	Ft	H	20.4
			ALLIGATOR CR	200.00	SqFt	L	
			BLOCK CR	800.00	SqFt	L	
			PATCH/UT CUT	10.00	SqFt	H	
			EDGE CR	50.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			PATCH/UT CUT	300.00	SqFt	H	
			POTHOLE	1.00	Count	H	
			EDGE CR	15.00	Ft	H	
			POTHOLE	2.00	Count	L	
			RUTTING	100.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			PATCH/UT CUT	20.00	SqFt	H	
			SLIPPAGE CR	60.00	SqFt	L	
			POTHOLE	12.00	Count	L	
			LANE SH DROP	20.00	Ft	H	
DEPRESSION	30.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
83	Maple Ave	83-1	EDGE CR	30.00	Ft	H	20.4
			DEPRESSION	20.00	SqFt	M	
			RAVELING	80.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			POTHOLE	2.00	Count	M	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	100.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	250.00	SqFt	M	
			POTHOLE	2.00	Count	M	
			RAVELING	250.00	SqFt	H	
			PATCH/UT CUT	20.00	SqFt	H	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	
			POTHOLE	2.00	Count	L	
			RAVELING	40.00	SqFt	M	
			PATCH/UT CUT	50.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	M	
			PATCH/UT CUT	25.00	SqFt	H	
			EDGE CR	25.00	Ft	H	
			POTHOLE	2.00	Count	L	
			EDGE CR	60.00	Ft	H	
			RAVELING	120.00	SqFt	M	
			ALLIGATOR CR	75.00	SqFt	M	
			EDGE CR	50.00	Ft	M	
			LANE SH DROP	50.00	Ft	H	
			RAVELING	80.00	SqFt	M	
			LANE SH DROP	25.00	Ft	H	
			PATCH/UT CUT	20.00	SqFt	H	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			RAVELING	70.00	SqFt	M	
			LANE SH DROP	30.00	Ft	H	
			POTHOLE	2.00	Count	M	
			RAVELING	500.00	SqFt	H	
			ALLIGATOR CR	500.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	200.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	M	
			PATCH/UT CUT	10.00	SqFt	H	
POTHOLE	1.00	Count	L				
RAVELING	200.00	SqFt	M				
PATCH/UT CUT	20.00	SqFt	H				
BLOCK CR	1,000.00	SqFt	L				
PATCH/UT CUT	20.00	SqFt	H				
POTHOLE	12.00	Count	M				
EDGE CR	40.00	Ft	H				
BLOCK CR	750.00	SqFt	L				
LANE SH DROP	15.00	Ft	H				
PATCH/UT CUT	20.00	SqFt	H				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
83	Maple Ave	83-1	RUTTING	40.00	SqFt	M	20.4
			L & T CR	2,000.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	L	
			ALLIGATOR CR	300.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			POTHOLE	1.00	Count	H	
			LANE SH DROP	40.00	Ft	H	
			PATCH/UT CUT	20.00	SqFt	H	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			BLOCK CR	110.00	SqFt	L	
			PATCH/UT CUT	50.00	SqFt	H	
			RAVELING	60.00	SqFt	H	
			LANE SH DROP	50.00	Ft	M	
			RAVELING	200.00	SqFt	H	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	150.00	Ft	H	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			PATCH/UT CUT	10.00	SqFt	H	
			BLOCK CR	150.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			PATCH/UT CUT	30.00	SqFt	H	
			SLIPPAGE CR	80.00	SqFt	L	
			POTHOLE	1.00	Count	L	
			PATCH/UT CUT	800.00	SqFt	H	
			ALLIGATOR CR	100.00	SqFt	L	
			PATCH/UT CUT	10.00	SqFt	H	
			BLOCK CR	440.00	SqFt	L	
			ALLIGATOR CR	500.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			LANE SH DROP	70.00	Ft	H	
			POTHOLE	1.00	Count	H	
			BLOCK CR	350.00	SqFt	L	
			PATCH/UT CUT	170.00	SqFt	H	
			PATCH/UT CUT	20.00	SqFt	H	
			RAVELING	60.00	SqFt	M	
			POTHOLE	3.00	Count	L	
			POTHOLE	1.00	Count	L	
			PATCH/UT CUT	80.00	SqFt	H	
BLOCK CR	100.00	SqFt	L				
LANE SH DROP	25.00	Ft	H				
PATCH/UT CUT	30.00	SqFt	H				
LANE SH DROP	40.00	Ft	M				
ALLIGATOR CR	200.00	SqFt	M				
POTHOLE	1.00	Count	H				
RAVELING	60.00	SqFt	M				
PATCH/UT CUT	30.00	SqFt	H				
PATCH/UT CUT	200.00	SqFt	H				
BLOCK CR	1,000.00	SqFt	L				
POTHOLE	5.00	Count	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
83	Maple Ave	83-1	PATCH/UT CUT	20.00	SqFt	H	20.4
			POTHOLE	2.00	Count	M	
			PATCH/UT CUT	100.00	SqFt	H	
			BLOCK CR	250.00	SqFt	L	
84	Fox Hollow Ln	84-1	L & T CR	26.00	Ft	L	44.0
			ALLIGATOR CR	25.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			DEPRESSION	40.00	SqFt	L	
			L & T CR	26.00	Ft	L	
			POTHOLE	1.00	Count	L	
			L & T CR	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			RAVELING	100.00	SqFt	M	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	160.00	SqFt	L	
			DEPRESSION	25.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			RAVELING	30.00	SqFt	H	
			RAVELING	60.00	SqFt	M	
			RUTTING	50.00	SqFt	L	
			WEATHERING	45.00	SqFt	L	
			WEATHERING	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			L & T CR	26.00	Ft	L	
			BUMPS/SAGS	26.00	Ft	L	
			POTHOLE	1.00	Count	L	
			DEPRESSION	20.00	SqFt	L	
			BUMPS/SAGS	26.00	Ft	L	
			WEATHERING	60.00	SqFt	L	
			L & T CR	26.00	Ft	L	
BUMPS/SAGS	26.00	Ft	L				
ALLIGATOR CR	90.00	SqFt	L				
BUMPS/SAGS	26.00	Ft	L				
WEATHERING	150.00	SqFt	L				
ALLIGATOR CR	100.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
84	Fox Hollow Ln	84-1	ALLIGATOR CR	75.00	SqFt	M	44.0
			ALLIGATOR CR	150.00	SqFt	M	
			BUMPS/SAGS	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	26.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			POTHOLE	2.00	Count	L	
			L & T CR	5.00	Ft	M	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	110.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			L & T CR	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			L & T CR	26.00	Ft	L	
			BUMPS/SAGS	26.00	Ft	L	
			BUMPS/SAGS	26.00	Ft	L	
			85	Fox Ln	85-1	ALLIGATOR CR	
WEATHERING	100.00	SqFt				L	
ALLIGATOR CR	120.00	SqFt				L	
RAVELING	30.00	SqFt				M	
ALLIGATOR CR	200.00	SqFt				L	
L & T CR	7.00	Ft				M	
EDGE CR	15.00	Ft				L	
L & T CR	26.00	Ft				L	
ALLIGATOR CR	80.00	SqFt				L	
L & T CR	26.00	Ft				L	
POTHOLE	1.00	Count				L	
L & T CR	26.00	Ft				L	
L & T CR	20.00	Ft				L	
ALLIGATOR CR	100.00	SqFt				L	
DEPRESSION	20.00	SqFt				H	
L & T CR	26.00	Ft				L	
BUMPS/SAGS	26.00	Ft				L	
RUTTING	200.00	SqFt				L	
ALLIGATOR CR	20.00	SqFt				M	
L & T CR	20.00	Ft				M	
ALLIGATOR CR	125.00	SqFt				M	
WEATHERING	40.00	SqFt				L	
L & T CR	100.00	Ft				L	
ALLIGATOR CR	60.00	SqFt				M	
ALLIGATOR CR	200.00	SqFt				L	
ALLIGATOR CR	60.00	SqFt				M	
ALLIGATOR CR	300.00	SqFt				L	
ALLIGATOR CR	50.00	SqFt				M	
POTHOLE	1.00	Count				H	
L & T CR	20.00	Ft				M	
POTHOLE	2.00	Count	L				
POTHOLE	1.00	Count	H				
L & T CR	15.00	Ft	M				
ALLIGATOR CR	160.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
85	Fox Ln	85-1	L & T CR	26.00	Ft	L	41.0
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	26.00	Ft	L	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	15.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			BUMPS/SAGS	26.00	Ft	L	
			DEPRESSION	60.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			RUTTING	25.00	SqFt	L	
			RUTTING	100.00	SqFt	L	
			BLOCK CR	75.00	SqFt	L	
			ALLIGATOR CR	15.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			WEATHERING	80.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	20.00	Ft	M	
			ALLIGATOR CR	15.00	SqFt	M	
			WEATHERING	200.00	SqFt	L	
			DEPRESSION	60.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			BUMPS/SAGS	26.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	L	
ALLIGATOR CR	80.00	SqFt	L				
ALLIGATOR CR	75.00	SqFt	M				
ALLIGATOR CR	30.00	SqFt	M				
ALLIGATOR CR	200.00	SqFt	M				
EDGE CR	80.00	Ft	M				
DEPRESSION	15.00	SqFt	L				
L & T CR	20.00	Ft	L				
DEPRESSION	20.00	SqFt	H				
L & T CR	800.00	Ft	L				
L & T CR	25.00	Ft	M				
ALLIGATOR CR	100.00	SqFt	M				
DEPRESSION	10.00	SqFt	L				
WEATHERING	100.00	SqFt	L				
86	Angelico St	86-1	BUMPS/SAGS	25.00	Ft	L	40.1
			DEPRESSION	25.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	25.00	Ft	L	
ALLIGATOR CR	400.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
86	Angelico St	86-1	BLOCK CR	300.00	SqFt	L	40.1
			BUMPS/SAGS	25.00	Ft	L	
			LANE SH DROP	300.00	Ft	H	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	L	
			BLOCK CR	360.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	40.00	Ft	M	
			L & T CR	25.00	Ft	L	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			L & T CR	13.00	Ft	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	300.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	L	
			L & T CR	600.00	Ft	L	
			L & T CR	25.00	Ft	L	
			L & T CR	25.00	Ft	L	
			BUMPS/SAGS	25.00	Ft	L	
			BUMPS/SAGS	25.00	Ft	L	
			POTHOLE	1.00	Count	H	
			WEATHERING	100.00	SqFt	L	
			EDGE CR	10.00	Ft	M	
			BUMPS/SAGS	25.00	Ft	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	25.00	Ft	L	
			RUTTING	45.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	L	
			EDGE CR	15.00	Ft	H	
			DEPRESSION	40.00	SqFt	L	
DEPRESSION	100.00	SqFt	M				
ALLIGATOR CR	100.00	SqFt	L				
ALLIGATOR CR	100.00	SqFt	L				
BUMPS/SAGS	25.00	Ft	L				
ALLIGATOR CR	300.00	SqFt	M				
BUMPS/SAGS	25.00	Ft	L				
BUMPS/SAGS	25.00	Ft	L				
L & T CR	25.00	Ft	L				
ALLIGATOR CR	500.00	SqFt	L				
L & T CR	25.00	Ft	L				
LANE SH DROP	25.00	Ft	H				
L & T CR	25.00	Ft	L				
BUMPS/SAGS	25.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
87	Da Vinci St	87-1	ALLIGATOR CR	100.00	SqFt	M	31.3
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	H	
			PATCH/UT CUT	10.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	
			BUMPS/SAGS	25.00	Ft	M	
			LANE SH DROP	160.00	Ft	H	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	140.00	SqFt	M	
			BUMPS/SAGS	25.00	Ft	L	
			RUTTING	200.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			EDGE CR	40.00	Ft	H	
			BUMPS/SAGS	25.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	120.00	Ft	H	
			ALLIGATOR CR	400.00	SqFt	M	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	500.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
			L & T CR	895.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	H	
			L & T CR	25.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			EDGE CR	15.00	Ft	H	
			EDGE CR	30.00	Ft	M	
			ALLIGATOR CR	350.00	SqFt	M	
EDGE CR	20.00	Ft	M				
ALLIGATOR CR	200.00	SqFt	H				
ALLIGATOR CR	300.00	SqFt	M				
88	El Greco St	88-1	BUMPS/SAGS	25.00	Ft	L	27.7
			BUMPS/SAGS	25.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	H	
			ALLIGATOR CR	300.00	SqFt	M	
			DEPRESSION	20.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	M	
			DEPRESSION	5.00	SqFt	L	
			LANE SH DROP	25.00	Ft	H	
			BUMPS/SAGS	25.00	Ft	M	
			BUMPS/SAGS	25.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	500.00	SqFt	M	
			ALLIGATOR CR	500.00	SqFt	M	
			L & T CR	25.00	Ft	M	
			L & T CR	200.00	Ft	M	
			L & T CR	25.00	Ft	M	
L & T CR	25.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
88	El Greco St	88-1	EDGE CR	5.00	Ft	H	27.7
			L & T CR	25.00	Ft	L	
			L & T CR	25.00	Ft	M	
			EDGE CR	100.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	M	
			BUMPS/SAGS	25.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			EDGE CR	20.00	Ft	H	
			WEATHERING	120.00	SqFt	L	
			BUMPS/SAGS	25.00	Ft	M	
			BUMPS/SAGS	25.00	Ft	M	
			ALLIGATOR CR	120.00	SqFt	L	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			BUMPS/SAGS	25.00	Ft	M	
			WEATHERING	160.00	SqFt	L	
			L & T CR	25.00	Ft	M	
			LANE SH DROP	60.00	Ft	H	
			EDGE CR	15.00	Ft	M	
			WEATHERING	120.00	SqFt	L	
L & T CR	25.00	Ft	M				
BLOCK CR	50.00	SqFt	L				
LANE SH DROP	20.00	Ft	H				
L & T CR	25.00	Ft	M				
L & T CR	25.00	Ft	M				
89	Raphael St	89-1	ALLIGATOR CR	120.00	SqFt	M	35.1
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	250.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	90.00	SqFt	H	
			BUMPS/SAGS	24.00	Ft	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	L	
			L & T CR	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			LANE SH DROP	10.00	Ft	H	
			L & T CR	24.00	Ft	L	
L & T CR	24.00	Ft	L				
BUMPS/SAGS	25.00	Ft	L				
ALLIGATOR CR	150.00	SqFt	H				
L & T CR	24.00	Ft	L				
BUMPS/SAGS	25.00	Ft	L				
L & T CR	24.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
89	Raphael St	89-1	ALLIGATOR CR	120.00	SqFt	L	35.1
			BUMPS/SAGS	25.00	Ft	L	
			L & T CR	24.00	Ft	L	
			EDGE CR	10.00	Ft	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	320.00	SqFt	M	
			BUMPS/SAGS	24.00	Ft	L	
			BUMPS/SAGS	24.00	Ft	L	
			BUMPS/SAGS	25.00	Ft	L	
			L & T CR	24.00	Ft	L	
90	Woodland Dr	90-1	EDGE CR	5.00	Ft	L	79.6
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	10.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			LANE SH DROP	80.00	Ft	H	
			L & T CR	23.00	Ft	L	
			L & T CR	15.00	Ft	L	
			LANE SH DROP	50.00	Ft	M	
			EDGE CR	15.00	Ft	L	
			LANE SH DROP	40.00	Ft	H	
			L & T CR	30.00	Ft	L	
			LANE SH DROP	40.00	Ft	L	
			LANE SH DROP	60.00	Ft	M	
			EDGE CR	10.00	Ft	H	
			EDGE CR	60.00	Ft	H	
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			EDGE CR	60.00	Ft	L	
			L & T CR	40.00	Ft	L	
			L & T CR	20.00	Ft	L	
			LANE SH DROP	100.00	Ft	H	
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	25.00	Ft	H	
L & T CR	25.00	Ft	L				
LANE SH DROP	50.00	Ft	H				
LANE SH DROP	100.00	Ft	H				
LANE SH DROP	120.00	Ft	H				
91	Katie Rd	91-1	ALLIGATOR CR	80.00	SqFt	M	28.7
			ALLIGATOR CR	25.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			L & T CR	23.00	Ft	L	
			L & T CR	23.00	Ft	L	
			RUTTING	120.00	SqFt	L	
			DEPRESSION	15.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	150.00	Ft	L	
			EDGE CR	10.00	Ft	H	
ALLIGATOR CR	75.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
91	Katie Rd	91-1	L & T CR	23.00	Ft	L	28.7
			RUTTING	60.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			DEPRESSION	75.00	SqFt	M	
			RUTTING	80.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			RUTTING	75.00	SqFt	L	
			L & T CR	23.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	23.00	Ft	L	
			L & T CR	23.00	Ft	L	
			EDGE CR	10.00	Ft	H	
			PATCH/UT CUT	35.00	SqFt	L	
			L & T CR	50.00	Ft	L	
LANE SH DROP	20.00	Ft	M				
92	Melissa Dr	92-1	L & T CR	300.00	Ft	L	46.7
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			RUTTING	20.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	30.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	80.00	Ft	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			L & T CR	22.00	Ft	L	
			EDGE CR	30.00	Ft	H	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			WEATHERING	300.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	M	
			RUTTING	30.00	SqFt	M	
			EDGE CR	10.00	Ft	M	
			EDGE CR	40.00	Ft	M	
			EDGE CR	80.00	Ft	H	
			L & T CR	22.00	Ft	L	
LANE SH DROP	50.00	Ft	H				
ALLIGATOR CR	200.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
92	Melissa Dr	92-1	ALLIGATOR CR	25.00	SqFt	M	46.7
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			WEATHERING	50.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			WEATHERING	60.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	22.00	Ft	L	
			L & T CR	250.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			LANE SH DROP	40.00	Ft	H	
			BUMPS/SAGS	22.00	Ft	L	
			ALLIGATOR CR	120.00	SqFt	M	
			L & T CR	22.00	Ft	L	
EDGE CR	50.00	Ft	H				
L & T CR	22.00	Ft	L				
L & T CR	22.00	Ft	L				
93	Connacht St	93-1	BUMPS/SAGS	22.00	Ft	L	84.1
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	60.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	25.00	Ft	M	
			LANE SH DROP	25.00	Ft	M	
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	20.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	L	
			LANE SH DROP	60.00	Ft	H	
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
LANE SH DROP	60.00	Ft	M				
94	Emerald Dr	94-1	LANE SH DROP	50.00	Ft	M	88.3
			LANE SH DROP	100.00	Ft	H	
			EDGE CR	15.00	Ft	L	
			LANE SH DROP	80.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	20.00	Ft	H	
			EDGE CR	10.00	Ft	M	
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	10.00	Ft	M	
LANE SH DROP	20.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
94	Emerald Dr	94-1	LANE SH DROP	40.00	Ft	M	88.3
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	40.00	Ft	H	
			LANE SH DROP	150.00	Ft	M	
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	30.00	Ft	L	
95	Leinster Dr	95-1	LANE SH DROP	50.00	Ft	H	89.2
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	40.00	Ft	L	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	15.00	Ft	L	
			L & T CR	1,000.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	80.00	Ft	H	
			LANE SH DROP	60.00	Ft	L	
			LANE SH DROP	6.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	100.00	Ft	L	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	120.00	Ft	H	
			LANE SH DROP	80.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
LANE SH DROP	20.00	Ft	M				
95	Leinster Dr	95-2	LANE SH DROP	35.00	Ft	H	88.2
			LANE SH DROP	50.00	Ft	M	
			LANE SH DROP	50.00	Ft	L	
			LANE SH DROP	35.00	Ft	M	
			LANE SH DROP	100.00	Ft	M	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	40.00	Ft	M	
			LANE SH DROP	5.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	25.00	Ft	H	
			LANE SH DROP	30.00	Ft	L	
			L & T CR	60.00	Ft	L	
LANE SH DROP	100.00	Ft	H				
96	Munster Rd	96-1	EDGE CR	15.00	Ft	M	76.6
			EDGE CR	35.00	Ft	M	
			EDGE CR	70.00	Ft	H	
			EDGE CR	20.00	Ft	L	
			LANE SH DROP	200.00	Ft	H	
			RAVELING	5.00	SqFt	M	
97	Shannon Ct	97-1	LANE SH DROP	15.00	Ft	M	91.4
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	10.00	Ft	H	
			LANE SH DROP	80.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
97	Shannon Ct	97-1	LANE SH DROP	15.00	Ft	M	91.4
98	131st Ct	98-1	ALLIGATOR CR	100.00	SqFt	M	42.3
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	20.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			LANE SH DROP	15.00	Ft	H	
			PATCH/UT CUT	5.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	L	
			DEPRESSION	10.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			RAVELING	20.00	SqFt	M	
			DEPRESSION	40.00	SqFt	L	
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	160.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	M	
			LANE SH DROP	40.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			ALLIGATOR CR	40.00	SqFt	M	
			LANE SH DROP	30.00	Ft	H	
			EDGE CR	20.00	Ft	M	
			LANE SH DROP	70.00	Ft	M	
			POTHOLE	2.00	Count	M	
WEATHERING	40.00	SqFt	L				
ALLIGATOR CR	60.00	SqFt	L				
99	132nd Ct	99-1	BUMPS/SAGS	22.00	Ft	M	41.7
			BUMPS/SAGS	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	L	
			BUMPS/SAGS	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	M	
			L & T CR	22.00	Ft	M	
			BUMPS/SAGS	22.00	Ft	M	
			WEATHERING	5,140.00	SqFt	H	
			BLOCK CR	180.00	SqFt	M	
			L & T CR	22.00	Ft	L	
BUMPS/SAGS	22.00	Ft	M				
100	133rd Ct	100-1	L & T CR	24.00	Ft	M	42.2
			ALLIGATOR CR	30.00	SqFt	M	
			LANE SH DROP	10.00	Ft	M	
			RAVELING	20.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			DEPRESSION	15.00	SqFt	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
100	133rd Ct	100-1	ALLIGATOR CR	15.00	SqFt	M	42.2
			BUMPS/SAGS	24.00	Ft	L	
			ALLIGATOR CR	250.00	SqFt	M	
			EDGE CR	15.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	M	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			RUTTING	75.00	SqFt	M	
			L & T CR	24.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
			BUMPS/SAGS	24.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			L & T CR	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	75.00	SqFt	M	
			ALLIGATOR CR	200.00	SqFt	M	
			L & T CR	20.00	Ft	M	
			L & T CR	25.00	Ft	L	
ALLIGATOR CR	130.00	SqFt	M				
EDGE CR	30.00	Ft	M				
101	Emily Ln	101-1	ALLIGATOR CR	15.00	SqFt	L	69.7
			EDGE CR	10.00	Ft	L	
			ALLIGATOR CR	15.00	SqFt	L	
			EDGE CR	15.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	70.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	75.00	SqFt	L	
			L & T CR	50.00	Ft	L	
			EDGE CR	10.00	Ft	L	
			L & T CR	10.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			L & T CR	30.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			L & T CR	35.00	Ft	L	
EDGE CR	10.00	Ft	L				
ALLIGATOR CR	50.00	SqFt	L				
L & T CR	25.00	Ft	L				
ALLIGATOR CR	25.00	SqFt	L				
ALLIGATOR CR	30.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
101	Emily Ln	101-1	L & T CR	10.00	Ft	L	69.7
			ALLIGATOR CR	80.00	SqFt	L	
			PATCH/UT CUT	75.00	SqFt	L	
			L & T CR	25.00	Ft	L	
			L & T CR	25.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			DEPRESSION	5.00	SqFt	L	
			L & T CR	25.00	Ft	L	
102	Gordon Ln (Middle)	102-1	ALLIGATOR CR	80.00	SqFt	M	35.0
			PATCH/UT CUT	180.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			PATCH/UT CUT	5.00	SqFt	H	
			PATCH/UT CUT	5.00	SqFt	H	
			PATCH/UT CUT	15.00	SqFt	H	
			PATCH/UT CUT	300.00	SqFt	L	
			RUTTING	60.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			EDGE CR	40.00	Ft	H	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	20.00	SqFt	M	
			DEPRESSION	20.00	SqFt	H	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			LANE SH DROP	25.00	Ft	M	
			L & T CR	35.00	Ft	L	
			BUMPS/SAGS	23.00	Ft	M	
			RAVELING	15.00	SqFt	H	
			RUTTING	40.00	SqFt	L	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	50.00	SqFt	M	
			POTHOLE	2.00	Count	M	
			RUTTING	40.00	SqFt	L	
			L & T CR	23.00	Ft	M	
			POTHOLE	1.00	Count	L	
			ALLIGATOR CR	120.00	SqFt	M	
			PATCH/UT CUT	5.00	SqFt	H	
			ALLIGATOR CR	100.00	SqFt	M	
			ALLIGATOR CR	120.00	SqFt	M	
			LANE SH DROP	15.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			POTHOLE	2.00	Count	H	
			BUMPS/SAGS	23.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	M	
LANE SH DROP	40.00	Ft	H				
EDGE CR	100.00	Ft	H				
L & T CR	23.00	Ft	L				
ALLIGATOR CR	100.00	SqFt	H				
L & T CR	15.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
102	Gordon Ln (Middle)	102-1	WEATHERING	40.00	SqFt	L	35.0
			RAVELING	10.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			RUTTING	30.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			RUTTING	35.00	SqFt	L	
			RUTTING	40.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	M	
			ALLIGATOR CR	250.00	SqFt	L	
			POTHOLE	1.00	Count	H	
			L & T CR	15.00	Ft	L	
			RAVELING	20.00	SqFt	H	
			RAVELING	10.00	SqFt	H	
			L & T CR	22.00	Ft	H	
			DEPRESSION	10.00	SqFt	L	
			RAVELING	80.00	SqFt	M	
			ALLIGATOR CR	300.00	SqFt	M	
			ALLIGATOR CR	45.00	SqFt	M	
			LANE SH DROP	15.00	Ft	M	
			RAVELING	330.00	SqFt	M	
			POTHOLE	1.00	Count	L	
			PATCH/UT CUT	1,255.00	SqFt	L	
103	Gordon Ln (North)	103-1	DEPRESSION	10.00	SqFt	L	39.5
			WEATHERING	60.00	SqFt	L	
			WEATHERING	40.00	SqFt	M	
			RUTTING	60.00	SqFt	L	
			DEPRESSION	30.00	SqFt	L	
			PATCH/UT CUT	30.00	SqFt	H	
			BLOCK CR	75.00	SqFt	L	
			PATCH/UT CUT	5.00	SqFt	H	
			ALLIGATOR CR	10.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			DEPRESSION	10.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			LANE SH DROP	30.00	Ft	H	
			POTHOLE	3.00	Count	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	25.00	SqFt	M	
			ALLIGATOR CR	80.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
104	Gordon Ln (South)	104-1	ALLIGATOR CR	100.00	SqFt	L	35.2
			ALLIGATOR CR	150.00	SqFt	M	
			POTHOLE	2.00	Count	H	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	10.00	Ft	M	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
104	Gordon Ln (South)	104-1	ALLIGATOR CR	65.00	SqFt	M	35.2
			ALLIGATOR CR	50.00	SqFt	M	
			DEPRESSION	25.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			ALLIGATOR CR	15.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			LANE SH DROP	60.00	Ft	M	
			SLIPPAGE CR	40.00	SqFt	L	
			L & T CR	11.00	Ft	L	
			L & T CR	15.00	Ft	H	
			PATCH/UT CUT	10.00	SqFt	H	
			RUTTING	80.00	SqFt	L	
			PATCH/UT CUT	1,100.00	SqFt	L	
			ALLIGATOR CR	45.00	SqFt	M	
			ALLIGATOR CR	240.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			RAVELING	50.00	SqFt	H	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	50.00	SqFt	L	
			DEPRESSION	30.00	SqFt	M	
			ALLIGATOR CR	75.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	20.00	Ft	L	
			L & T CR	20.00	Ft	M	
			L & T CR	21.00	Ft	L	
			POTHOLE	3.00	Count	L	
			L & T CR	21.00	Ft	M	
			SLIPPAGE CR	150.00	SqFt	H	
			L & T CR	40.00	Ft	H	
			SLIPPAGE CR	60.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	80.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			BUMPS/SAGS	21.00	Ft	M	
			SLIPPAGE CR	60.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	M	
			L & T CR	30.00	Ft	H	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
			PATCH/UT CUT	120.00	SqFt	L	
ALLIGATOR CR	20.00	SqFt	M				
RAVELING	50.00	SqFt	H				
ALLIGATOR CR	200.00	SqFt	M				
ALLIGATOR CR	50.00	SqFt	L				
DEPRESSION	20.00	SqFt	L				
RUTTING	80.00	SqFt	H				
ALLIGATOR CR	40.00	SqFt	L				
ALLIGATOR CR	30.00	SqFt	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
104	Gordon Ln (South)	104-1	SLIPPAGE CR	65.00	SqFt	M	35.2
			LANE SH DROP	10.00	Ft	M	
			SLIPPAGE CR	200.00	SqFt	L	
			SLIPPAGE CR	40.00	SqFt	L	
			ALLIGATOR CR	45.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			RUTTING	45.00	SqFt	L	
			ALLIGATOR CR	150.00	SqFt	M	
			PATCH/UT CUT	50.00	SqFt	M	
			RUTTING	60.00	SqFt	L	
			DEPRESSION	5.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			SLIPPAGE CR	100.00	SqFt	L	
			L & T CR	25.00	Ft	H	
			L & T CR	15.00	Ft	M	
			SLIPPAGE CR	600.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	150.00	SqFt	M	
			DEPRESSION	10.00	SqFt	L	
			LANE SH DROP	10.00	Ft	H	
			SLIPPAGE CR	100.00	SqFt	H	
			EDGE CR	20.00	Ft	H	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	M	
			RAVELING	100.00	SqFt	H	
			ALLIGATOR CR	30.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			RAVELING	120.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			RUTTING	100.00	SqFt	L	
			DEPRESSION	10.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			DEPRESSION	5.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			BUMPS/SAGS	21.00	Ft	L	
			L & T CR	25.00	Ft	M	
			ALLIGATOR CR	10.00	SqFt	M	
			DEPRESSION	15.00	SqFt	L	
			L & T CR	21.00	Ft	M	
			L & T CR	35.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			LANE SH DROP	50.00	Ft	L	
ALLIGATOR CR	180.00	SqFt	M				
DEPRESSION	20.00	SqFt	L				
L & T CR	25.00	Ft	H				
EDGE CR	60.00	Ft	H				
PATCH/UT CUT	1,125.00	SqFt	L				
ALLIGATOR CR	180.00	SqFt	M				
PATCH/UT CUT	190.00	SqFt	L				
ALLIGATOR CR	75.00	SqFt	M				
ALLIGATOR CR	60.00	SqFt	M				
L & T CR	21.00	Ft	L				
ALLIGATOR CR	50.00	SqFt	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
104	Gordon Ln (South)	104-1	ALLIGATOR CR	50.00	SqFt	M	35.2
			ALLIGATOR CR	40.00	SqFt	M	
			DEPRESSION	30.00	SqFt	L	
			BLOCK CR	200.00	SqFt	M	
			L & T CR	30.00	Ft	H	
			L & T CR	21.00	Ft	H	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	M	
			L & T CR	10.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			BUMPS/SAGS	21.00	Ft	L	
			L & T CR	21.00	Ft	M	
			PATCH/UT CUT	1,200.00	SqFt	L	
			DEPRESSION	20.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	M	
			ALLIGATOR CR	35.00	SqFt	M	
			ALLIGATOR CR	150.00	SqFt	M	
			PATCH/UT CUT	155.00	SqFt	L	
			BUMPS/SAGS	21.00	Ft	L	
			ALLIGATOR CR	45.00	SqFt	M	
			SLIPPAGE CR	100.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
L & T CR	20.00	Ft	M				
L & T CR	10.00	Ft	M				
POTHOLE	1.00	Count	M				
L & T CR	15.00	Ft	H				
105	Fairway Dr	105-1	L & T CR	30.00	Ft	L	78.6
			LANE SH DROP	30.00	Ft	H	
			L & T CR	30.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	30.00	Ft	L	
			DEPRESSION	10.00	SqFt	L	
			DEPRESSION	5.00	SqFt	L	
			ALLIGATOR CR	10.00	SqFt	L	
			L & T CR	100.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			L & T CR	80.00	Ft	L	
			ALLIGATOR CR	30.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	60.00	Ft	L	
			L & T CR	100.00	Ft	L	
L & T CR	40.00	Ft	L				
106	Longwood Way	106-1	ALLIGATOR CR	60.00	SqFt	L	75.7
			LANE SH DROP	30.00	Ft	H	
			EDGE CR	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	60.00	Ft	M	
			DEPRESSION	20.00	SqFt	H	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
106	Longwood Way	106-1	L & T CR	50.00	Ft	L	75.7
			ALLIGATOR CR	30.00	SqFt	L	
			L & T CR	20.00	Ft	L	
			LANE SH DROP	5.00	Ft	M	
			EDGE CR	20.00	Ft	L	
			BLOCK CR	40.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			EDGE CR	20.00	Ft	M	
			LANE SH DROP	20.00	Ft	L	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	100.00	SqFt	L	
			LANE SH DROP	30.00	Ft	H	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	11.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	L	
			EDGE CR	20.00	Ft	H	
			LANE SH DROP	50.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			BUMPS/SAGS	22.00	Ft	L	
			LANE SH DROP	60.00	Ft	M	
			EDGE CR	20.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	40.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			LANE SH DROP	20.00	Ft	M	
			L & T CR	50.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	11.00	Ft	L	
L & T CR	2,000.00	Ft	L				
L & T CR	20.00	Ft	L				
LANE SH DROP	120.00	Ft	H				
EDGE CR	10.00	Ft	H				
EDGE CR	20.00	Ft	H				
EDGE CR	20.00	Ft	H				
L & T CR	50.00	Ft	L				
LANE SH DROP	30.00	Ft	M				
L & T CR	11.00	Ft	L				
L & T CR	11.00	Ft	L				
L & T CR	20.00	Ft	L				
ALLIGATOR CR	20.00	SqFt	L				
107	Oakmont Ct	107-1	L & T CR	40.00	Ft	L	73.9
			LANE SH DROP	30.00	Ft	L	
			LANE SH DROP	30.00	Ft	H	
			L & T CR	150.00	Ft	L	
			DEPRESSION	80.00	SqFt	L	
			EDGE CR	5.00	Ft	H	
			L & T CR	30.00	Ft	L	
LANE SH DROP	10.00	Ft	L				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
107	Oakmont Ct	107-1	EDGE CR	20.00	Ft	H	73.9
			L & T CR	50.00	Ft	L	
			EDGE CR	25.00	Ft	M	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	L	
			EDGE CR	10.00	Ft	M	
			ALLIGATOR CR	5.00	SqFt	M	
			LANE SH DROP	100.00	Ft	M	
			EDGE CR	10.00	Ft	M	
108	Oakmont Dr	108-1	LANE SH DROP	10.00	Ft	H	76.7
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			SLIPPAGE CR	20.00	SqFt	L	
			L & T CR	150.00	Ft	L	
			EDGE CR	10.00	Ft	M	
			RUTTING	30.00	SqFt	L	
			EDGE CR	20.00	Ft	M	
			WEATHERING	60.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	M	
			L & T CR	40.00	Ft	L	
			L & T CR	30.00	Ft	L	
			SLIPPAGE CR	30.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	10.00	Ft	L	
			LANE SH DROP	20.00	Ft	L	
L & T CR	30.00	Ft	L				
109	Valley View Ct	109-1	WEATHERING	30.00	SqFt	L	64.7
			ALLIGATOR CR	75.00	SqFt	L	
			LANE SH DROP	20.00	Ft	M	
			EDGE CR	10.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			L & T CR	161.00	Ft	L	
			ALLIGATOR CR	20.00	SqFt	L	
			LANE SH DROP	5.00	Ft	H	
			L & T CR	200.00	Ft	L	
			DEPRESSION	20.00	SqFt	L	
			LANE SH DROP	10.00	Ft	M	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	30.00	Ft	H	
WEATHERING	30.00	SqFt	L				
110	Valley View Dr	110-1	LANE SH DROP	10.00	Ft	H	77.8
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			EDGE CR	80.00	Ft	M	
			L & T CR	15.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	200.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	1,000.00	Ft	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
110	Valley View Dr	110-1	LANE SH DROP	20.00	Ft	M	77.8
			ALLIGATOR CR	50.00	SqFt	L	
			EDGE CR	10.00	Ft	L	
			ALLIGATOR CR	10.00	SqFt	L	
			L & T CR	500.00	Ft	L	
			EDGE CR	30.00	Ft	M	
			L & T CR	20.00	Ft	L	
			EDGE CR	40.00	Ft	M	
			EDGE CR	25.00	Ft	H	
			ALLIGATOR CR	60.00	SqFt	L	
			EDGE CR	40.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			ALLIGATOR CR	25.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	15.00	SqFt	L	
			ALLIGATOR CR	15.00	SqFt	L	
			LANE SH DROP	15.00	Ft	H	
			EDGE CR	50.00	Ft	L	
			EDGE CR	40.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	22.00	Ft	L	
			LANE SH DROP	30.00	Ft	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			LANE SH DROP	20.00	Ft	H	
			BLOCK CR	90.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	30.00	Ft	L	
ALLIGATOR CR	25.00	SqFt	L				
LANE SH DROP	100.00	Ft	M				
ALLIGATOR CR	10.00	SqFt	L				
111	Spyglass Ct	111-1	LANE SH DROP	60.00	Ft	L	67.0
			LANE SH DROP	40.00	Ft	M	
			ALLIGATOR CR	25.00	SqFt	L	
			EDGE CR	80.00	Ft	L	
			EDGE CR	20.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	13.00	Ft	L	
			EDGE CR	50.00	Ft	H	
			L & T CR	50.00	Ft	L	
			L & T CR	13.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			PATCH/UT CUT	125.00	SqFt	M	
			ALLIGATOR CR	10.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			PATCH/UT CUT	25.00	SqFt	M	
			ALLIGATOR CR	70.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	M	
			LANE SH DROP	80.00	Ft	M	
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	20.00	Ft	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
111	Spyglass Ct	111-1	ALLIGATOR CR	25.00	SqFt	L	67.0
			LANE SH DROP	100.00	Ft	H	
			LANE SH DROP	50.00	Ft	H	
			PATCH/UT CUT	25.00	SqFt	L	
			EDGE CR	50.00	Ft	M	
			ALLIGATOR CR	40.00	SqFt	L	
			L & T CR	20.00	Ft	L	
112	129th St	112-1	RAVELING	80.00	SqFt	M	52.6
			BUMPS/SAGS	19.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	19.00	Ft	L	
			BLOCK CR	100.00	SqFt	L	
			L & T CR	19.00	Ft	L	
			ALLIGATOR CR	250.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
			DEPRESSION	200.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	19.00	Ft	M	
			BUMPS/SAGS	19.00	Ft	L	
			L & T CR	19.00	Ft	L	
			EDGE CR	30.00	Ft	H	
			RUTTING	30.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	25.00	SqFt	L	
			L & T CR	19.00	Ft	L	
			LANE SH DROP	50.00	Ft	L	
			L & T CR	50.00	Ft	M	
			LANE SH DROP	30.00	Ft	M	
			L & T CR	19.00	Ft	L	
			BUMPS/SAGS	19.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	M	
			EDGE CR	15.00	Ft	H	
			ALLIGATOR CR	30.00	SqFt	L	
			LANE SH DROP	50.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			PATCH/UT CUT	150.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			DEPRESSION	25.00	SqFt	L	
			EDGE CR	30.00	Ft	H	
			LANE SH DROP	10.00	Ft	H	
			L & T CR	19.00	Ft	L	
			L & T CR	200.00	Ft	M	
			L & T CR	19.00	Ft	L	
			SLIPPAGE CR	120.00	SqFt	L	
			ALLIGATOR CR	20.00	SqFt	L	
L & T CR	19.00	Ft	L				
ALLIGATOR CR	150.00	SqFt	M				
L & T CR	19.00	Ft	L				
POTHOLE	1.00	Count	L				
ALLIGATOR CR	100.00	SqFt	L				
L & T CR	19.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
112	129th St	112-1	L & T CR	19.00	Ft	L	52.6
			ALLIGATOR CR	100.00	SqFt	L	
			L & T CR	19.00	Ft	L	
			POTHOLE	1.00	Count	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	25.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	M	
			POTHOLE	1.00	Count	M	
			BLOCK CR	100.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	19.00	Ft	M	
			ALLIGATOR CR	50.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	M	
			L & T CR	19.00	Ft	L	
113	130th Pl	113-1	EDGE CR	15.00	Ft	L	53.8
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			L & T CR	21.00	Ft	L	
			ALLIGATOR CR	100.00	SqFt	L	
			DEPRESSION	60.00	SqFt	M	
			EDGE CR	50.00	Ft	H	
			BLOCK CR	200.00	SqFt	L	
			BLOCK CR	90.00	SqFt	L	
			RUTTING	100.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	L	
			ALLIGATOR CR	200.00	SqFt	L	
			BLOCK CR	80.00	SqFt	L	
			L & T CR	21.00	Ft	L	
			LANE SH DROP	100.00	Ft	M	
			LANE SH DROP	100.00	Ft	M	
			ALLIGATOR CR	20.00	SqFt	M	
			BUMPS/SAGS	21.00	Ft	L	
			L & T CR	100.00	Ft	L	
			EDGE CR	100.00	Ft	H	
			EDGE CR	50.00	Ft	M	
			L & T CR	800.00	Ft	L	
			PATCH/UT CUT	60.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			BLOCK CR	200.00	SqFt	L	
			PATCH/UT CUT	65.00	SqFt	M	
			L & T CR	15.00	Ft	M	
BUMPS/SAGS	21.00	Ft	L				
ALLIGATOR CR	200.00	SqFt	L				
ALLIGATOR CR	200.00	SqFt	M				
114	132nd St	114-1	DEPRESSION	90.00	SqFt	H	0.1
			POTHOLE	1.00	Count	H	
			POTHOLE	20.00	Count	H	
			POTHOLE	10.00	Count	H	
			ALLIGATOR CR	120.00	SqFt	M	
			RUTTING	80.00	SqFt	H	
EDGE CR	200.00	Ft	M				

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
114	132nd St	114-1	POTHOLE	4.00	Count	L	0.1
			POTHOLE	3.00	Count	L	
			POLISHED AG	18,048.00	SqFt	N	
			LANE SH DROP	200.00	Ft	H	
			RAVELING	1,500.00	SqFt	M	
			EDGE CR	80.00	Ft	M	
			BLOCK CR	200.00	SqFt	M	
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	1,500.00	SqFt	M	
			PATCH/UT CUT	60.00	SqFt	H	
			RAVELING	150.00	SqFt	H	
			PATCH/UT CUT	5,000.00	SqFt	H	
			L & T CR	15.00	Ft	L	
115	135th St	115-1	PATCH/UT CUT	100.00	SqFt	H	2.8
			RAVELING	200.00	SqFt	M	
			RUTTING	100.00	SqFt	L	
			RUTTING	150.00	SqFt	M	
			PATCH/UT CUT	20.00	SqFt	H	
			RAVELING	300.00	SqFt	M	
			POTHOLE	15.00	Count	M	
			RAVELING	150.00	SqFt	H	
			RAVELING	40.00	SqFt	H	
			RAVELING	75.00	SqFt	H	
			ALLIGATOR CR	7,500.00	SqFt	M	
			RAVELING	600.00	SqFt	H	
			L & T CR	435.00	Ft	H	
115	135th St	115-2	L & T CR	10.00	Ft	L	54.7
			DEPRESSION	15.00	SqFt	H	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	200.00	SqFt	L	
			L & T CR	50.00	Ft	L	
			LANE SH DROP	20.00	Ft	M	
			ALLIGATOR CR	80.00	SqFt	L	
			BUMPS/SAGS	20.00	Ft	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	50.00	SqFt	M	
			ALLIGATOR CR	180.00	SqFt	M	
L & T CR	100.00	Ft	L				
116	Archer Ave Access	116-1	-	0	-	-	NA
117	Bell Rd	117-1	ALLIGATOR CR	200.00	SqFt	M	26.3
			POTHOLE	1.00	Count	H	
			ALLIGATOR CR	100.00	SqFt	L	
			POTHOLE	1.00	Count	H	
			POTHOLE	1.00	Count	M	
			POTHOLE	2.00	Count	M	
			ALLIGATOR CR	120.00	SqFt	M	
			RUTTING	40.00	SqFt	L	
			BLOCK CR	60.00	SqFt	M	
			L & T CR	284.00	Ft	M	
WEATHERING	60.00	SqFt	H				
118	Boyer St	118-1	POTHOLE	1.00	Count	H	29.3
			ALLIGATOR CR	40.00	SqFt	M	
			ALLIGATOR CR	20.00	SqFt	L	

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
118	Boyer St	118-1	POTHOLE	2.00	Count	L	29.3
			ALLIGATOR CR	20.00	SqFt	M	
			L & T CR	40.00	Ft	L	
			RAVELING	40.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	240.00	SqFt	L	
			L & T CR	40.00	Ft	H	
			ALLIGATOR CR	25.00	SqFt	M	
			RAVELING	150.00	SqFt	H	
			ALLIGATOR CR	80.00	SqFt	M	
			POTHOLE	2.00	Count	H	
			ALLIGATOR CR	20.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			LANE SH DROP	10.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	M	
			LANE SH DROP	20.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	M	
			LANE SH DROP	20.00	Ft	L	
			PATCH/UT CUT	20.00	SqFt	H	
			ALLIGATOR CR	40.00	SqFt	M	
			POTHOLE	3.00	Count	H	
			LANE SH DROP	50.00	Ft	H	
			POTHOLE	1.00	Count	M	
			DEPRESSION	40.00	SqFt	H	
			DEPRESSION	25.00	SqFt	H	
			RAVELING	10.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	40.00	SqFt	L	
ALLIGATOR CR	60.00	SqFt	H				
RAVELING	60.00	SqFt	M				
POTHOLE	3.00	Count	L				
ALLIGATOR CR	40.00	SqFt	L				
ALLIGATOR CR	120.00	SqFt	L				
POTHOLE	3.00	Count	L				
119	Grant Rd	119-1	-	0	-	-	NA

Branch ID	Branch Name	Section ID	Distress Description	Quantity	Quantity Units	Severity	PCI
120	Kotlin Rd	120-1	BUMPS/SAGS	13.00	Ft	H	4.2
			BUMPS/SAGS	13.00	Ft	H	
			ALLIGATOR CR	100.00	SqFt	H	
			BUMPS/SAGS	13.00	Ft	H	
			DEPRESSION	30.00	SqFt	H	
			BUMPS/SAGS	13.00	Ft	H	
			POTHOLE	1.00	Count	H	
			LANE SH DROP	20.00	Ft	H	
			PATCH/UT CUT	500.00	SqFt	H	
			RAVELING	1,500.00	SqFt	H	
			POTHOLE	25.00	Count	H	
			BLOCK CR	250.00	SqFt	M	
			DEPRESSION	20.00	SqFt	H	
			DEPRESSION	20.00	SqFt	H	
			BUMPS/SAGS	13.00	Ft	H	
121	Oak Ln	121-1	EDGE CR	50.00	Ft	L	67.6
			LANE SH DROP	400.00	Ft	H	
			ALLIGATOR CR	150.00	SqFt	L	
			LANE SH DROP	30.00	Ft	M	
			LANE SH DROP	400.00	Ft	H	
			LANE SH DROP	60.00	Ft	H	
122	Walnut St	122-1	ALLIGATOR CR	60.00	SqFt	L	52.1
			L & T CR	100.00	Ft	L	
			ALLIGATOR CR	25.00	SqFt	M	
			ALLIGATOR CR	60.00	SqFt	L	
			ALLIGATOR CR	30.00	SqFt	L	
			WEATHERING	150.00	SqFt	L	
			EDGE CR	15.00	Ft	M	
			L & T CR	20.00	Ft	L	
			ALLIGATOR CR	80.00	SqFt	L	
			L & T CR	9.00	Ft	L	
			ALLIGATOR CR	40.00	SqFt	L	
			ALLIGATOR CR	80.00	SqFt	M	
			RUTTING	80.00	SqFt	L	
			ALLIGATOR CR	120.00	SqFt	L	
			RUTTING	35.00	SqFt	L	
			LANE SH DROP	15.00	Ft	M	
			ALLIGATOR CR	35.00	SqFt	L	
			BLOCK CR	150.00	SqFt	L	
			RUTTING	30.00	SqFt	L	
			L & T CR	120.00	Ft	L	
ALLIGATOR CR	50.00	SqFt	M				
EDGE CR	110.00	Ft	M				
LANE SH DROP	30.00	Ft	H				

WORK PLAN OPTION 1 - 400K PER YEAR BUDGETED FOR ROADWAY REPAIRS

Branch Name	Section ID	2025				2026				2027				2028				2029			
		Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After
Spyglass Ct	111-1	Preventive	\$2,166.75	66.34	66.76	Preventive	\$3,326.38	62.91	63.34	Major Below Critical	\$62,476.66	59.49	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00
129th St	112-1	StopGap	\$282.27	52.06	52.06	StopGap	\$335.59	48.46	48.46	StopGap	\$453.36	44.86	44.86	StopGap	\$577.90	41.27	41.27	StopGap	\$783.90	37.67	37.67
130th Pl	113-1	StopGap	\$250.91	53.08	53.08	StopGap	\$303.11	48.27	48.27	StopGap	\$440.35	43.46	43.46	StopGap	\$621.99	38.66	38.66	StopGap	\$913.08	33.84	33.84
132nd St	114-1	StopGap	\$10,828.72	0.00	0.00	StopGap	\$11,153.58	0.00	0.00	StopGap	\$11,488.19	0.00	0.00	StopGap	\$11,832.84	0.00	0.00	StopGap	\$12,187.82	0.00	0.00
135th St	115-1	StopGap	\$9,813.68	2.03	2.03	StopGap	\$10,462.05	0.00	0.00	StopGap	\$10,775.91	0.00	0.00	StopGap	\$11,099.19	0.00	0.00	StopGap	\$11,432.16	0.00	0.00
135th St	115-2	Major Below Critical	\$31,173.13	53.89	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$20.55	88.00	88.27
Archer Ave Access	116-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Bell Rd	117-1	StopGap	\$600.91	25.54	25.54	StopGap	\$1,003.10	21.22	21.22	StopGap	\$1,677.35	16.90	16.90	StopGap	\$2,490.03	12.59	12.59	StopGap	\$3,141.71	8.27	8.27
Boyer St	118-1	StopGap	\$971.48	28.76	28.76	StopGap	\$1,966.61	25.15	25.15	StopGap	\$3,020.42	21.54	21.54	StopGap	\$4,644.46	17.94	17.94	StopGap	\$6,762.66	14.33	14.33
Grant Rd	119-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Kotlin Rd	120-1	StopGap	\$6,082.86	3.74	3.74	StopGap	\$6,602.72	0.71	0.71	StopGap	\$6,882.22	0.00	0.00	StopGap	\$7,088.69	0.00	0.00	StopGap	\$7,301.35	0.00	0.00
Oak Ln	121-1	Preventive	\$1,049.83	66.79	67.65	Preventive	\$1,816.72	62.34	63.21	Major Below Critical	\$34,155.56	57.90	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00
Walnut St	122-1	Major Below Critical	\$27,509.54	51.35	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$16.87	88.00	88.27
Total			\$387,023.63	53.49			\$387,780.37	51.54			\$388,122.48	49.80			\$384,811.04	47.52			\$388,397.64	44.36	

WORK PLAN OPTION 2 - MAINTAIN AVERAGE PCI RATING OF 70 (+/-3)

Branch Name	Section ID	2025				2026				2027				2028				2029			
		Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After
Spyglass Ct	111-1	Preventive	\$2,166.75	66.34	66.76	Preventive	\$3,326.38	62.91	63.34	Major Below Critical	\$62,476.66	59.49	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00
129th St	112-1	Major Below Critical	\$101,483.79	52.06	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$63.48	88.00	88.27
130th Pl	113-1	Major Below Critical	\$87,649.26	53.08	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$56.43	88.00	88.27
132nd St	114-1	StopGap	\$10,828.72	0.00	0.00	StopGap	\$11,153.58	0.00	0.00	StopGap	\$11,488.19	0.00	0.00	StopGap	\$11,832.84	0.00	0.00	StopGap	\$12,187.82	0.00	0.00
135th St	115-1	StopGap	\$9,813.68	2.03	2.03	StopGap	\$10,462.05	0.00	0.00	StopGap	\$10,775.91	0.00	0.00	StopGap	\$11,099.19	0.00	0.00	StopGap	\$11,432.16	0.00	0.00
135th St	115-2	Major Below Critical	\$31,173.13	53.89	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$20.55	88.00	88.27
Archer Ave Access	116-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Bell Rd	117-1	StopGap	\$600.91	25.54	25.54	StopGap	\$1,003.10	21.22	21.22	StopGap	\$1,677.35	16.90	16.90	StopGap	\$2,490.03	12.59	12.59	StopGap	\$3,141.71	8.27	8.27
Boyer St	118-1	StopGap	\$971.48	28.76	28.76	StopGap	\$1,966.61	25.15	25.15	StopGap	\$3,020.42	21.54	21.54	StopGap	\$4,644.46	17.94	17.94	StopGap	\$6,762.66	14.33	14.33
Grant Rd	119-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Kotlin Rd	120-1	StopGap	\$6,082.86	3.74	3.74	StopGap	\$6,602.72	0.71	0.71	StopGap	\$6,882.22	0.00	0.00	StopGap	\$7,088.69	0.00	0.00	StopGap	\$7,301.35	0.00	0.00
Oak Ln	121-1	Preventive	\$1,049.83	66.79	67.65	Preventive	\$1,816.72	62.34	63.21	Major Below Critical	\$34,155.56	57.90	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00
Walnut St	122-1	Major Below Critical	\$27,509.54	51.35	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Preventive	\$16.87	88.00	88.27
Total			\$1,884,869.57	59.58			\$1,872,507.68	62.21			\$1,872,592.34	64.41			\$1,883,379.20	67.74			\$1,871,524.44	69.78	

WORK PLAN OPTION 3 - MAINTAIN ALL PCI RATINGS ABOVE CRITICAL 50

Branch Name	Section ID	2025				2026				2027				2028				2029			
		Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After	Work	Cost	PCI Before	PCI After
Spyglass Ct	111-1	Do Nothing	\$0.00	66.34	66.34	Do Nothing	\$0.00	62.49	62.49	Do Nothing	\$0.00	58.65	58.65	Do Nothing	\$0.00	54.81	54.81	Do Nothing	\$0.00	50.95	50.95
129th St	112-1	Do Nothing	\$0.00	52.06	52.06	Major Below Critical	\$112,518.98	48.46	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00
130th Pl	113-1	Do Nothing	\$0.00	53.08	53.08	Major Below Critical	\$100,620.96	48.26	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00
132nd St	114-1	Major Below Critical	\$117,311.97	0.00	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Do Nothing	\$0.00	88.00	88.00
135th St	115-1	Major Below Critical	\$110,038.47	2.03	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Do Nothing	\$0.00	88.00	88.00
135th St	115-2	Do Nothing	\$0.00	53.89	53.89	Major	\$36,241.65	48.62	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00
Archer Ave Access	116-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Bell Rd	117-1	Major Below Critical	\$35,073.99	25.54	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Do Nothing	\$0.00	88.00	88.00
Boyer St	118-1	Major Below Critical	\$105,527.47	28.76	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Do Nothing	\$0.00	88.00	88.00
Grant Rd	119-1	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-	-	\$0.00	-	-
Kotlin Rd	120-1	Major Below Critical	\$70,277.98	3.74	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00	Do Nothing	\$0.00	88.00	88.00
Oak Ln	121-1	Do Nothing	\$0.00	66.79	66.79	Do Nothing	\$0.00	61.47	61.47	Do Nothing	\$0.00	56.16	56.16	Do Nothing	\$0.00	50.85	50.85	Major Below Critical	\$46,382.21	45.53	100.00
Walnut St	122-1	Do Nothing	\$0.00	51.35	51.35	Major Below Critical	\$31,801.47	46.36	100.00	Do Nothing	\$0.00	97.00	97.00	Do Nothing	\$0.00	94.00	94.00	Do Nothing	\$0.00	91.00	91.00
Total			\$8,805,362.13		88.32		\$622,453.22		88.04		\$53,962.80		85.41		\$150,957.94		83.19		\$400,034.31		82.57